OnCell 5000 Series User's Manual

Third Edition, August 2010

www.moxa.com/product

© 2010 Moxa Inc. All rights reserved.
Reproduction without permission is prohibited.

OnCell 5000 Series User's Manual

The software described in this manual is furnished under a license agreement and may be used only in accordance with the terms of that agreement.

Copyright Notice

Copyright ©2010 Moxa Inc.
All rights reserved.
Reproduction without permission is prohibited.

Trademarks

The MOXA logo is a registered trademark of Moxa Inc.
All other trademarks or registered marks in this manual belong to their respective manufacturers.

Disclaimer

Information in this document is subject to change without notice and does not represent a commitment on the part of Moxa.

Moxa provides this document as is, without warranty of any kind, either expressed or implied, including, but not limited to, its particular purpose. Moxa reserves the right to make improvements and/or changes to this manual, or to the products and/or the programs described in this manual, at any time.

Information provided in this manual is intended to be accurate and reliable. However, Moxa assumes no responsibility for its use, or for any infringements on the rights of third parties that may result from its use.

This product might include unintentional technical or typographical errors. Changes are periodically made to the information herein to correct such errors, and these changes are incorporated into new editions of the publication.

Technical Support Contact Information

www.moxa.com/support

Moxa Americas
Toll-free: 1-888-669-2872
Tel: +1-714-528-6777
Fax: +1-714-528-6778

Moxa China (Shanghai office)
Toll-free: 800-820-5036
Tel: +86-21-5258-9955
Fax: +86-10-6872-3958

Moxa Europe
Tel: +49-89-3 70 03 99-0
Fax: +49-89-3 70 03 99-99

Moxa Asia-Pacific
Tel: +886-2-8919-1230
Fax: +886-2-8919-1231

Table of Contents

1. Introduction 1
- Overview 2
- Package Checklist 2
- Product Features 2
- Product Specifications 3
  - Specification Comparison Chart 3
  - OnCell 5004/5104 4
  - OnCell 5004/5104-HSDPA 5

2. Getting Started 1
- Panel Layout 2
  - OnCell 5004/5004-HSDPA/5004-HSDPA-JPS/ 5004-HSDPA-JPN 2
  - OnCell 5104/5104-HSDPA/5104-HSDPA-JPS/ 5104-HSDPA-JPN 3
- DIN-Rail and Rack Mounting 4
  - Wall or Cabinet Mounting 4
  - DIN-Rail Mounting 4
- Connecting the Hardware 4
  - SIM Card Installation 5
  - Connecting the Power 5
  - Connecting the I/O Port 5
  - Connecting to the Network 5
  - LED Indicators 6
  - Reset Button 6

3. Initial IP Address Configuration 1
- Static and Dynamic IP Addresses 2
- Factory Default IP Address 2
- Configuration Options 2
  - OnCell Search Utility 2
  - Web Console 2
  - Telnet Console 2
  - Serial Console 5

4. Web Console Configuration 1
- Accessing the Web Console 2
- Web Console Navigation 2
- Basic Settings 3
  - Device Settings 3
  - Time Settings 3
- Network Settings 4
  - LAN Settings 4
  - LAN Port Configuration 5
  - Cellular WAN Settings 5
  - GuaranLink Settings 6
  - Ethernet WAN Settings 8
  - DNS Settings 9
  - DHCP Settings 10
  - Auto IP Report 10
- Advanced Network Settings 11
  - Firewall Settings 11
  - WAN IP Filter 12
  - Route Table 13

5. System Management Settings 1
- Misc. Network Settings 2
  - SNMP Agent Settings 2
  - DDNS Configuration 3
- Auto Warning Settings 3
  - Event Settings 3
  - E-mail Alert 4
  - SNMP Trap 5
  - SMS Alert 5
- Maintenance 6
  - Console Settings 6
  - PING Test 6
  - System Log Settings 6
  - Firmware Upgrade 7
  - Configuration Import/Export 7
  - Load Factory Defaults 8
  - Change Password 8
- Certificate 8

Ethernet SSL Certificate Import 8
Certificate/Key Delete 9
System Monitoring 9
Network Connections 9
Network Statistics 9
Routing 10
DHCP Client List 10
Internet Sessions List 10
System Log 11
Dout State 11
Din and Power Status 11
Save Configuration 12
Restart 12
Restart System 12

6. Introduction and Configuring VPN 1

What Are VPNs? 2
OnCell VPN Specifications 2
OnCell VPN Web Console Settings 3
Manual Key/ESP 3
Configuration 3
Remote Network 3
Local Network 3
Incoming Security Settings 4
Outgoing Security Settings 4
ISAKMP/PSK 5
Configuration 5
Remote Network 5
ISAKMP (Key Management) 6
Local Identity 6
ISAKMP phase 1 6
ISAKMP phase 2 6
Advanced settings 6
VPN system log events and error codes 7

7. Configuring OnCell Central Management Software 1

Step 1: Server Settings 2
System Requirements 2
Installing OnCell Central Manager 2
Using OnCell Central Manager 5
Step 2: OnCell Device Web Console Settings 10
OnCell Central Settings 10
OnCell Central Server 10
Service Forwarding 11
Step 3: Host Settings and Management 11
OnCell Central Web Console 15
Server 15
Overview 16
Control Ports/User Ports Information. 16
Account Settings 17
Device 17
All Devices 18
All User Ports 19
Service Forwarding 20
Firmware Upgrade 20
Device's Settings and Maintenance 21
Overview 22
User Ports 22
Service Forwarding 23
Maintenance 24
Logout 25

8. OnCell Search Utility 1

Installing the Search Utility 2
Configuring the OnCell Search Utility 3

A. Default Settings 1

B. Dynamic Domain Name Server 1

Overview 1
Configuration 2

C. Auto IP Report Protocol 1

1

Introduction

The OnCell 5000 cellular routers use a WAN connection to allow you to access your network from virtually anywhere within the operating range of your WAN network. There are currently four OnCell 5000 models: The OnCell 5004, OnCell 5104, OnCell 5004-HSDPA, OnCell 5104-HSDPA, OnCell 5004-HSDPA-JPS, OnCell 5104-HSDPA-JPS, OnCell 5004-HSDPA-JPN, and OnCell 5104-HSDPA-JPN. The main differences between the models are the mechanical design, I/O support, and cellular technology support.

The following topics are covered in this chapter:

- **Overview**
- **Package Checklist**
- **Product Features**
- **Product Specifications**

Overview

The OnCell 5000 is a seires of high-performance industrial grade cellular routers that allow up to 4 Ethernet-based devices to simultaneously use a single cellular data account for primary or backup network connectivity to remote sites and devices. Both the 5004 and 5104 series products provide the functionality of a cellular router, firewall, and switch in one device. The difference between the OnCell 5004 and OnCell 5104 is that the OnCell 5104 comes with a built-in relay output that can be configured to indicate the priority of events when notifying or warning engineers in the field, and the two digital inputs allow you to connect basic I/O devices, such as sensors, to the cellular network. The OnCell 5004 can be placed on a desktop or wall-mounted, whereas the OnCell 5104 has an IA design and can be attached to a DIN-Rail. Both products use 12 to 48 VDC power inputs with a screw-on connector for greater reliability, and the Ethernet port comes with 1.5 KV magnetic isolation protection to keep your system safe from unexpected electrical discharges.

Package Checklist

Each OnCell 5000 cellular router is shipped in a separate box with standard accessories. In addition, several optional accessories can be ordered separately. When you receive your shipment, please check the contents of the box carefully, and notify your Moxa sales representative if any of the items are missing or appear to be damaged.

OnCell 5000 cellular routers are shipped with the following items:

Standard Accessories

- Rubber SMA antenna
- Rubber stand (OnCell 5004 /5004-HSDPA only)
- Wallmount Kit (OnCell 5004 /5004-HSDPA only)
- Din-Rail Kit (OnCell 5104 /5104-HSDPA only)
- Terminal block (screw type)
- Document and Software CD
- Product warranty statement
- Quick Installation Guide

Optional Accessories

- DC Power Supply (screw-on)
- DC Power Supply (standard)
- Power Jack to Terminal Block Cable
- Antennas (impedance = 50 ohms):
  - ANT-CQB-AHSM-00-3m: Omni 0 dBi / 10 cm, magnetic SMA quad-band GSM/GPRS antenna, 3 m
  - ANT-CQB-AHSM-03-3m: Omni 3 dBi / 25 cm, magnetic SMA quad-band GSM/GPRS antenna, 3 m
  - ANT-CQB-AHSM-05-3m: Omni 5 dBi / 37cm, magnetic SMA quad-band GSM/GPRS antenna, 3 m
  - ANT-WCDMA-ASM-1.5: Omni 1.5 dBi, rubber SMA Five-band GSM/GPRS/UMTS/HSDPA antenna

Product Features

- Quad-band 900/1800, 850/1900 MHz GSM/GPRS
- Universal tri-band 850/1900/2100 MHz UMTS/HSDPA
  Special design for Japan Softbank Network (OnCell 5004-HSDPA-JPS/5104-HSDPA-JPS only)
  Special design for Japan NTTDocomo Network (OnCell 5004-HSDPA-JPN/OnCell 5104-HSDPA-JPN only)
- Can connect up to 4 10/100BaseT(X) devices
- Redundant power (1 power jack; 1 terminal block) (OnCell 5004 series only)
- Industrial primary and backup wireless WAN connectivity

- 2 digital inputs and 1 relay output (OnCell 5104 series only)

Product Specifications

Specification Comparison Chart

	OnCell 5004/5104	OnCell 5004/5104-HSDPA	OnCell 5004/5104-HSDPA-JPS 5004/5104-HSDPA-JPN
Cellular Interface			
Standards	GSM/GPRS	GSM/GPRS/EDGE/UMTS/ HSDPA	UMTS/HSDPA
Quad-band Options	Quad-band 850/900/1800/1900 MHz	Tri-band 850/1900/2100 MHz Quad-band 850/900/1800/1900 MHz	2100 MHz
GPRS Multi-slot	Class 10		-
GPRS Terminal Device	Class B		-
GRRS Coding Schemes	CS1 to CS4		-
Tx Power	1 watt GSM1800/1900, 2 watt EGSM850/900	1 watt GSM1800, 2 watt GSM900, 0.25 watt UMTS/HSDPA, 0.5 watt EDGE900, 0.4 watt EDGE1800	0.25 watt UMTS/HSDPA
WAN Interface			
Number of Ports	1		
Ethernet	10/100M (RJ45)		
1.5 KV Magnetic Isolation Protection	Yes		
LAN Interface			
Number of Ports	4		
Ethernet	10/100M (RJ45)		
1.5KV Magnetic Isolation Protection	Yes		
SIM Interface			
Number of SIMs	2		
SIM Control	3V		
I/O Interface			
Alarm Contacts & Digital Inputs	OnCell 5004 series: No I/O interface OnCell 5104 series: 1 Digital Output & 2 Digital Inputs		
Software			
Network Protocols	UDP/TCP, SNTP, ICMP, DDNS, DHCP/BOOTP, PPPoE, PPP, DNS, Relay, HTTPS, Telnet		
Router/Firewall	NAT, port forwarding, routing		
Authentication	Local user-name and password		
Security	IP filtering		
Physical Characteristics			
Housing	Aluminum (IP30)		
Weight	OnCell 5004 series: 505 ± 5 g OnCell 5104 series: 645 ± 5 g		
Dimensions	OnCell 5004 series: 158 x 103 x 34 mm OnCell 5104 series: 160 x 103 x 50 mm		

Environmental Limits		
Operating temperature	-30 to 55°C (-22 to 131°F), 5 to 95% RH	
Storage Temperature	-40 to 75°C (-40 to 167°F)	
Regulatory Approvals		
Safety	UL (UL60950)	-
Radio	FCC Part 22H, FCC Part 24E, EN301 489-1, EN301 489-7 EN301 511	VCCI
EMC	CE: EN55022 Class A / EN55024, FCC: FCC part 15 subpart B, Class A, EN61000-4-2 (ESD) Level 4, EN61000-4-3 (RS) Level 3, EN61000-4-4 (EFT) Level 4, EN61000-4-5 (Surge) Level 3, EN61000-4-8 Level 3, EN61000-4-12 Level 3	-
Reliability		
Warranty	5 years (see www.moxa.com/warranty for details)	

OnCell 5004/5104

Cellular Interface

Standards: GSM/GPRS

Band Options: Quad-band 850/900 and 1800/1900 MHz

GPRS Multi-slot Class: Class 10

GPRS Terminal Device Class: Class B

GPRS Coding Schemes: CS1 to CS4

Tx Power: 1 watt GSM 1800/1900, 2 watts EGSM 850/900

WAN Interface

Number of Ports: 1

Ethernet: 10/100 Mbps, RJ45 connector, Auto MDI/MDIX

Magnetic Isolation Protection: 1.5 KV built-in

LAN Interface

Number of Ports: 4

Ethernet: 10/100 Mbps, RJ45 connector, auto MDI/MDIX

Magnetic Isolation Protection: 1.5 KV built-in

SIM Interface

Number of SIMs: 2

SIM Control: 3 V

I/O Interface (OnCell 5104 only)

Alarm Contact: 1 relay output with current carrying capacity of 1 A @ 24 VDC

Digital Inputs: 2 electrically isolated inputs

- +13 to +30 V for state “1” (On)
- +3 to -30 V for state “0” (Off)

Software

Network Protocols: UDP/TCP, SNTP, ICMP, DDNS, DHCP/BOOTP, PPPoE, PPP, DNS Relay, HTTPS, Telnet, IPSec

Router/Firewall: NAT, port forwarding, routing

Authentication: Local user-name and password

Security: IP filtering

Management Software

OnCell Central Manager: Centralized management solution for accessing private IPs from the Internet

Physical Characteristics

Housing: Aluminum, providing IP30 protection

Weight:

OnCell 5004: 505±5 g

OnCell 5104: 645±5 g

Dimensions:

OnCell 5004: 158 x 103 x 35 mm (6.22 x 4.06 x 1.38 in)

OnCell 5104: 135 x 103 x 50.8 mm (5.315 x 4.06 x 2.000 in)

Environmental Limits

Operating Temperature: -30 to 55°C (-22 to 131°F)

Operating Humidity: 5 to 95% RH

Storage Temperature: -40 to 75°C (-40 to 167°F)

Power Requirements

Number of Power Inputs: 1 terminal block, 1 power jack

Input Voltage: 12 to 48 VDC

Data Link:

OnCell 5004: 900 mA (peak) @ 12 V

OnCell 5104: 950 mA (peak) @ 12 V

Regulatory Approvals

Safety:

UL: UL60950

RF:

FCC Part22H

FCC PART24E

EN301 489-1

EN301 489-7

EN301 511

EMC:

CE: EN55022 Class A / EN55024

FCC: FCC part 15 subpart B, Class A

Warranty

Warranty Period: 5 years

Details: See www.moxa.com/warranty

OnCell 5004/5104-HSDPA

Cellular Interface

Standards: GSM/GPRS/EDGE/UMTS/HSDPA

Band Options:

Tri-band UMTS/HSDPA 850/1900/2100 MHz

Quad-band GSM/GPRS/EDGE 850/900/1800/1900 MHz

EDGE Multi-slot Class: Class 10

EDGE Terminal Device Class: Class B

GPRS Multi-slot Class: Class 10

GPRS Terminal Device Class: Class B

GPRS Coding Schemes: CS1 to CS4

Tx Power:

GSM900: 2 W

UMTS/HSDPA: 0.25 W

EDGE900: 0.5 W

EDGE1800: 0.4 W

GSM1800: 1 W

Cellular Interface (OnCell 5004/5104-HSDPA-JPS/JPN)

Standards: UMTS/HSDPA

Band Options: 2100 MHz

Tx Power: UMTS/HSDPA: 0.25 W

WAN Interface

Number of Ports: 1

Ethernet: 10/100 Mbps, RJ45 connector, Auto MDI/MDIX

Magnetic Isolation Protection: 1.5 KV built-in

LAN Interface

Number of Ports: 4

Ethernet: 10/100 Mbps, RJ45 connector, auto MDI/MDIX

Magnetic Isolation Protection: 1.5 KV built-in

SIM Interface

Number of SIMs: 2

SIM Control: 3 V

I/O Interface (OnCell 5104-HSDPA)

Alarm Contact: 1 relay output with current carrying capacity of 1 A @ 24 VDC

Digital Inputs: 2 electrically isolated inputs

- +13 to +30 V for state “1” (On)
- +3 to -30 V for state “0” (Off)

Software

Network Protocols: UDP/TCP, SNTP, ICMP, DDNS, DHCP/BOOTP, PPPoE, PPP, DNS Relay, HTTPS, Telnet, IPSec

Router/Firewall: NAT, port forwarding, static routing

Authentication: Local user-name and password

Security: IP filtering

Management Software

OnCell Central Manager: Centralized management solution for accessing private IPs from the Internet

Physical Characteristics

Housing: Aluminum, providing IP30 protection

Weight:

OnCell 5004-HSDPA, OnCell 5004-HSDPA-JPS: 505±5 g

OnCell 5104-HSDPA, OnCell 5104-HSDPA-JPS: 645±5 g

Dimensions:

OnCell 5004-HSDPA, OnCell 5004-HSDPA-JPS: 158 x 103 x 34 mm (6.22 x 4.06 x 1.34 in)

OnCell 5104-HSDPA, OnCell 5104-HSDPA-JPS: 135 x 103 x 50.8 mm (5.32 x 4.06 x 2.00 in)

Environmental Limits

Operating Temperature: -30 to 55°C (-22 to 131°F)

Operating Humidity: 5 to 95% RH

Storage Temperature: -40 to 75°C (-40 to 167°F)

Power Requirements

Number of Power Inputs: 1 terminal block, 1 power jack

Input Voltage: 12 to 48 VDC

Data Link:

OnCell 5004-HSDPA, OnCell 5004-HSDPA-JPS: 900 mA (peak) @ 12 V

OnCell 5104-HSDPA, OnCell 5104-HSDPA-JPS: 950 mA (peak) @ 12 V

Regulatory Approvals (OnCell 5004/5104-HSDPA)

Safety:

UL: UL60950

RF:

FCC Part22H

FCC PART24E

EN301 489-1

EN301 489-7

EN301 511

EMC:

CE: EN55022 Class A / EN55024

FCC: FCC part 15 subpart B, Class A

Regulatory Approvals (OnCell 5004/5104-HSDPA-JPS/JPN)

EMC: VCCI

Warranty

Warranty Period: 5 years

Details: See www.moxa.com/warranty

2

Getting Started

This chapter covers the hardware installation of the OnCell 5000. Software installation is covered in the next chapter.

The following topics are covered in this chapter:

- **Panel Layout**
  - OnCell 5004/5004-HSDPA/5004-HSDPA-JPS/ 5004-HSDPA-JPN
  - OnCell 5104/5104-HSDPA/5104-HSDPA-JPS/ 5104-HSDPA-JPN
- **DIN-Rail and Rack Mounting**
  - Wall or Cabinet Mounting
  - DIN-Rail Mounting
- **Connecting the Hardware**
  - SIM Card Installation
  - Connecting the Power
  - Connecting the I/O Port
  - Connecting to the Network
  - LED Indicators
  - Reset Button

Panel Layout

OnCell 5004/5004-HSDPA/5004-HSDPA-JPS/ 5004-HSDPA-JPN

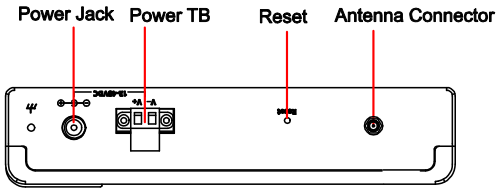

Top View

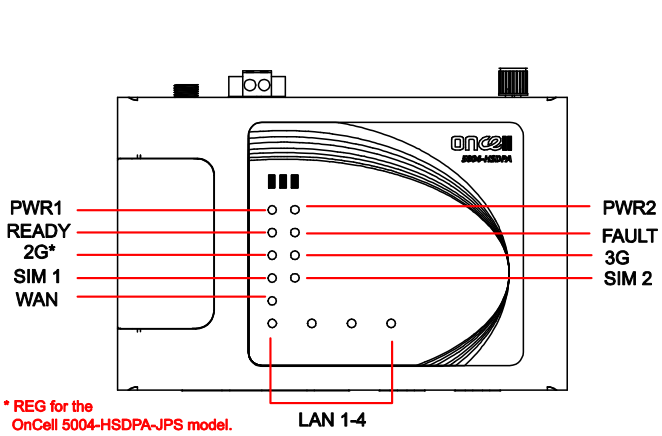

Front View

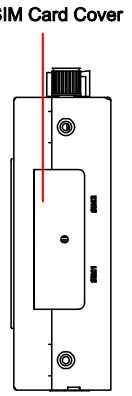

Side View

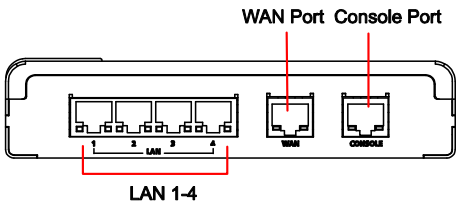

Rear View

OnCell 5104/5104-HSDPA/5104-HSDPA-JPS/ 5104-HSDPA-JPN

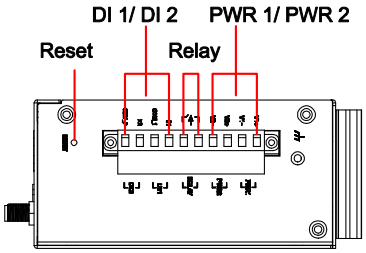

Top View

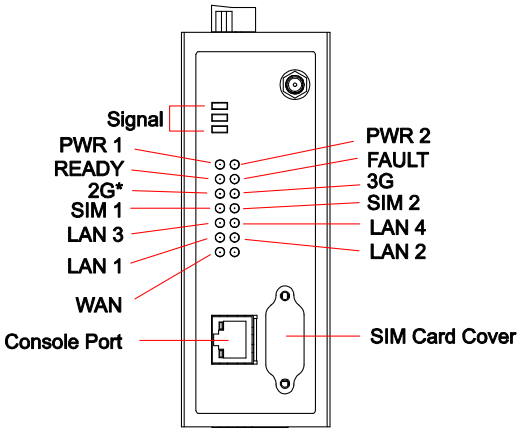

* REG for the OnCell 5004-HSDPA-JPS model.

Front View

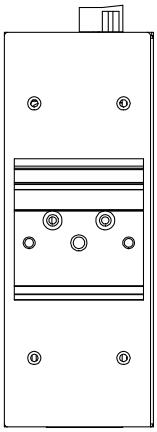

Back View

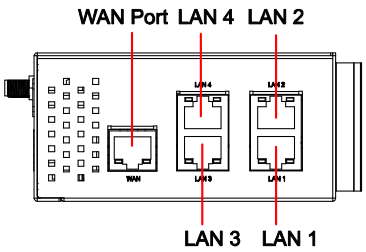

Bottom View

Left Side



Right Side



DIN-Rail and Rack Mounting

Wall or Cabinet Mounting

The OnCell 5004, OnCell 5004-HSDPA, and OnCell 5004-HSDPA-JPS device servers have built-in "ears" for attaching the device server to a wall or the inside of a cabinet. We suggest using two screws per ear to attach the device servers to a wall or the inside of a cabinet. The heads of the screws should be less than 6.0 mm in diameter, and the shafts should be less than 3.5 mm in diameter, as shown in the figure at the right.



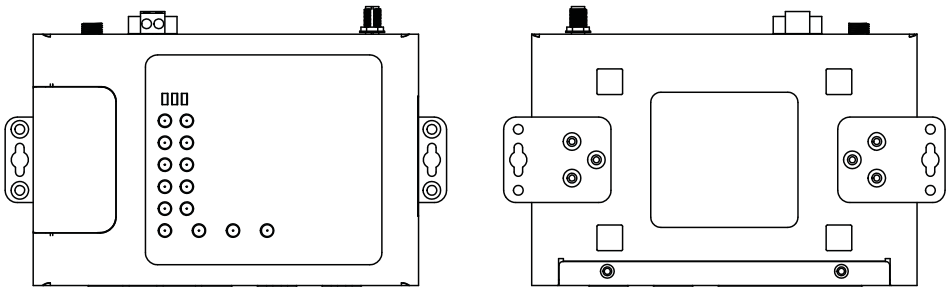

DIN-Rail Mounting

DIN-rail attachments can be purchased separately to attach the OnCell 5104, OnCell 5104-HSDPA, and OnCell 5104-HSDPA-JPS to a DIN-Rail. When snapping the attachments to the DIN-Rail, make sure that the stiff metal springs are at the top.

Right Side Back View

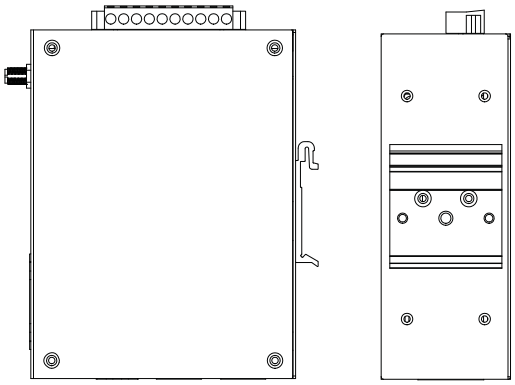

Connecting the Hardware

This section describes how to connect the OnCell 5000 cellular IP-modem to a host PC or Ethernet devices for first time testing purposes. We cover *SIM card Installation*, *Connecting the Power*, *Connecting the I/O Port*, *Connecting to the Network*, *LED Indicators*, and *Reset Button*.

SIM Card Installation

In order to protect the SIM card, the SIM card slot is located inside the OnCell 5004 and 5104 series' housing. You will need to unscrew and remove the outer SIM card cover before installing or removing the SIM card.

OnCell 5004 Series



OnCell 5104 Series

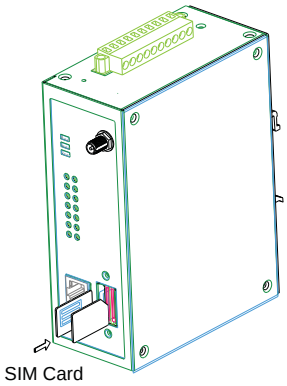

Connecting the Power

The dual power inputs that connect to the 4-pin power terminal block (2 terminals per power input) can be used to connect the OnCell 5104 to a variety of field power sources that support 12 to 48 VDC. The OnCell 5004 cellular routers have 1 power jack and 1 terminal block for connecting the power. After connecting the power wire to the OnCell's terminal block or power jack, the "PWR" LED will glow a solid green color to indicate that the system is ready.

Connecting the I/O Port

The OnCell 5104 has six terminals on the terminal block for the I/O ports, with 4 terminals used for each input, and 2 terminals used for the output.

Digital Input

Power input levels determine the ON/OFF states of the digital inputs:

- On: +13 to +30 V for state "1"
- Off: +3 to -30 V for state "0"

Digital Output

- 1 relay output with current carrying capacity of 1 A @ 24 VDC.

Connecting to the Network

Connect one end of the Ethernet cable to the OnCell's 10/100M Ethernet port and the other end of the cable to the Ethernet network. If the cable is properly connected, the OnCell will indicate a valid connection to the Ethernet in the following way:

- The Ethernet LED glows a solid green when connected to a 100 Mbps Ethernet network.
- The Ethernet LED glows a solid orange when connected to a 10 Mbps Ethernet network.
- The Ethernet LED flashes when Ethernet packets are being transmitted or received.

LED Indicators

The following table explains the LED indicators on the front panel of the OnCell 5004-HSDPA/5104-HSDPA:

Type	Color	LED Function
PWR 1	Green	Activation of DC Power
	Off	Power is off, or power error condition exists.
PWR 2	Green	Activation of DC Power
	Off	Power is off, or power error condition exists.
2G	Amber	2G is connected
	Off	2G is disconnected
3G	Amber	3G is connected (OnCell 5004-HSDPA and OnCell 5004-HSDPA-JPS)
	Off	3G is disconnected(OnCell 5004-HSDPA and OnCell 5004-HSDPA-JPS)
REG	Off	Cannot register with cellular providers
	Amber	Registered with cellular provider
SIM1/2	Off	SIM slot not in used
	Amber	Static on: SIM inserted and PIN code correct in used normally.
		Blinking slowly (1sec):SIM inserted and PIN code incorrect: blinking
		Blinking slowly (0.5sec):No SIM inserted
Ready	Green	Steady on: Software Ready. Blinking slowly (1 sec): The OnCell has been located by Ready the OnCell Search Utility.
	off	Power is off, or is booting up.
Fault	Red	Steady on: Booting up, or IP fault. Blinking slowly (1 sec): Cannot get an IP address from the DHCP server
	off	Power is off, or there is no error condition.
LAN 1-4	Green	Steady on: Software Ready. Blinking slowly (1 sec): Data transmission
	off	Power is off, or is booting up.
Signal (3 LEDs)	Green	Signal Level (at least 2 LEDs must illuminated for data transmission)

ATTENTION

REG LED:

- OFF: Cannot register with cellular providers using 3G mode, due to the wrong PIN code, or no cellular provider available. Signal LEDs will also be off.
- ON: Registered with cellular provider.

3G LED:

- OFF: Cannot register with cellular providers using UMTS/HSDPA mode due to the wrong PIN code (UMTS or HSDPA/signal LEDs off), no cellular provider available (UMTS or HSDPA/signal LEDs off), wrong APN (UMTS or HSDPA on/signal LEDs off), or wrong username/password (UMTS or HSDPA on/signal LEDs off).
- ON: Registered with cellular provider using UMTS/HSDPA mode. UMTS or HSDPA/Signal LEDs will be on.

Reset Button

Press and hold the **Reset** button for 5 sec to load factory defaults: Use a pointed object, such as a straightened paper clip or toothpick to press the reset button. This will cause the Ready LED to blink on and off. The factory defaults will be loaded once the Ready LED stops blinking (default LAN IP: 192.168.127.254).

3

Initial IP Address Configuration

When setting up the OnCell 5000 for the first time, the first thing you should do is configure the IP address. This chapter introduces the different methods that can be used to do this.

The following topics are covered in this chapter:

- **Static and Dynamic IP Addresses**
- **Factory Default IP Address**
- **Configuration Options**
  - OnCell Search Utility
  - Web Console
  - Telnet Console
  - Serial Console

Static and Dynamic IP Addresses

Determine whether your OnCell 5000 needs to use a static IP address or dynamic IP address (either DHCP or BOOTP application).

- *If your OnCell 5000 is used in a static IP environment*, you must assign a specific IP address using one of the tools described in this chapter.
- *If your OnCell 5000 is used in a dynamic IP environment*, the IP address will be assigned automatically from over the network. In this case, set the IP configuration mode to DHCP or BOOTP.

ATTENTION

Consult your network administrator on how to reserve a fixed IP address for your OnCell 5000 in the MAC-IP mapping table when using a DHCP Server or BOOTP Server. For most applications, you should assign a fixed IP address to your OnCell 5000.

Factory Default IP Address

The OnCell 5000 is configured with the following default private IP address:

192.168.127.254

Note that IP addresses that begin with “192.168” are referred to as private IP addresses. Devices configured with a private IP address are not directly accessible from a public network. For example, you would not be able to ping a device with a private IP address from an outside Internet connection. If your application requires sending data over a public network, such as the Internet, your OnCell 5000 will need a valid public IP address, which can be leased from a local ISP.

Configuration Options

OnCell Search Utility

You may configure your OnCell 5000 with the bundled OnCell Search Utility for Windows. Refer to *Chapter 7, OnCell Search Utility*, for details on how to install and use OnCell Search Utility.

Web Console

You may configure your OnCell 5000 using a standard web browser. Refer to *Chapter 4, Using the Web Console*, for details on how to access and use the OnCell 5000’s web console.

Telnet Console

Depending on how your computer and network are configured, you may find it convenient to use network access to set up your OnCell 5000’s IP address. This can be done using Telnet.

ATTENTION

Figures in this section were taken from the OnCell 5000 Telnet console.

1. From the Windows desktop, select **Start → Run**, and then type the following content in the **Run** window: **telnet 192.168.127.254**. If your IP address is different from the default setting, use your IP address instead. Click **OK**.

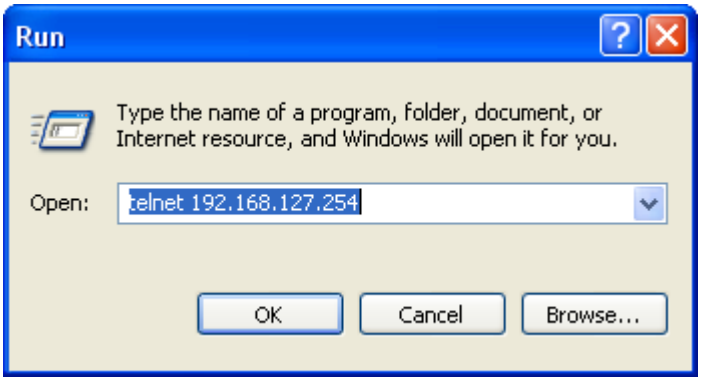

2. The console terminal type selection is displayed, as shown below. Enter **1** for **ansi/vt100**, and then press **ENTER** to continue.

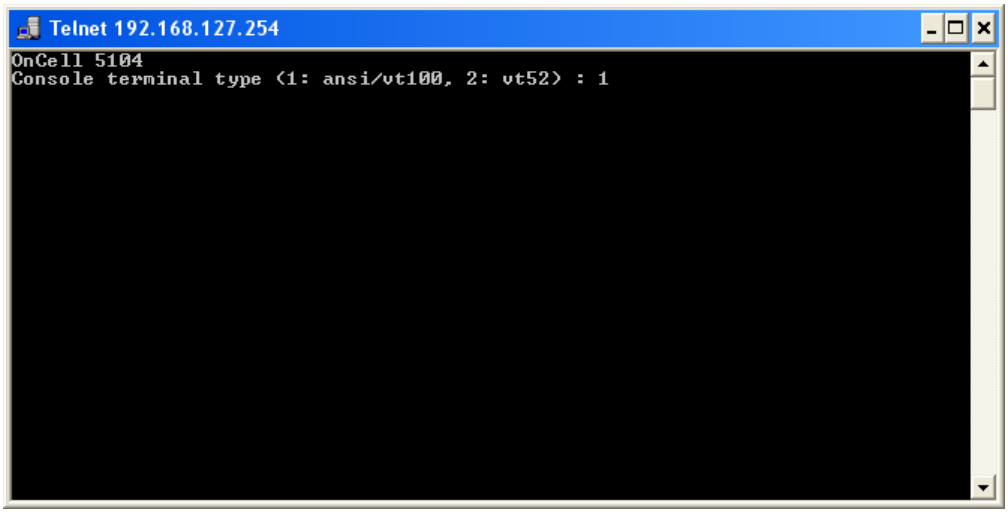

3. The following window will only appear if the OnCell 5000 is password protected. Enter the console password if you are prompted to do so, and then press **ENTER**.

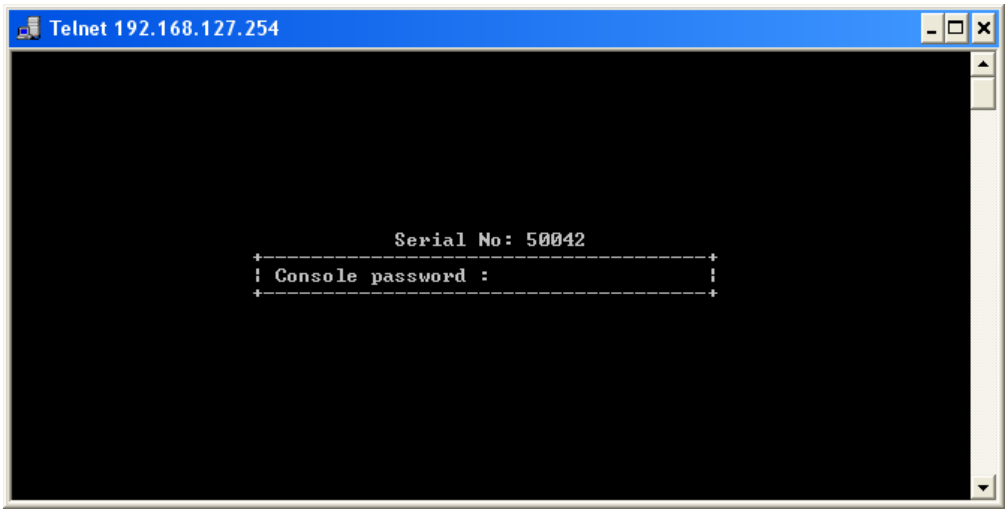

4. Press **N** or use the arrow keys to select **Network**, and then press **ENTER**.

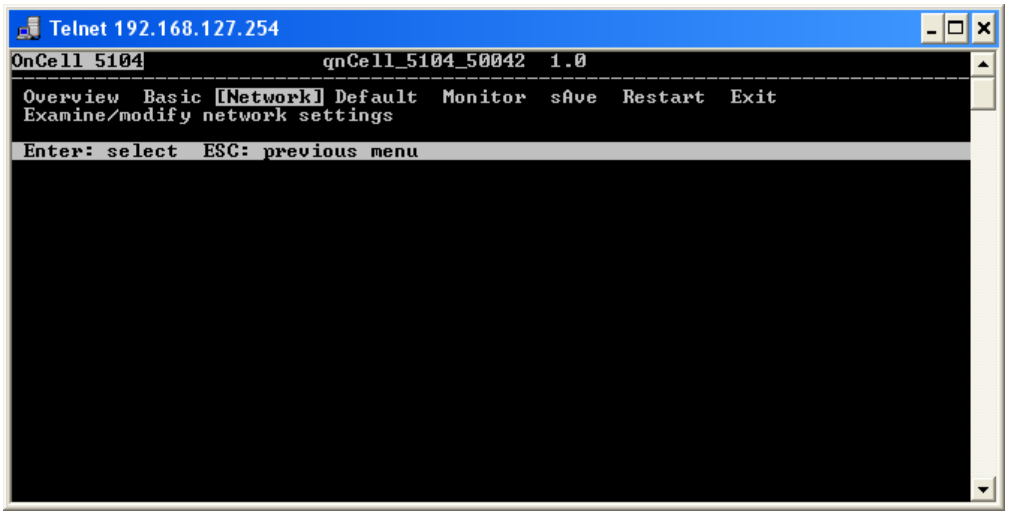
Telnet 192.168.127.254
OnCell 5104 qnCell_5104_50042 1.0
Overview Basic [Network] Default Monitor sAve Restart Exit
Examine/modify network settings
Enter: select ESC: previous menu

5. Press **L** or use the arrow keys to select **LAN**, and then press **ENTER**.

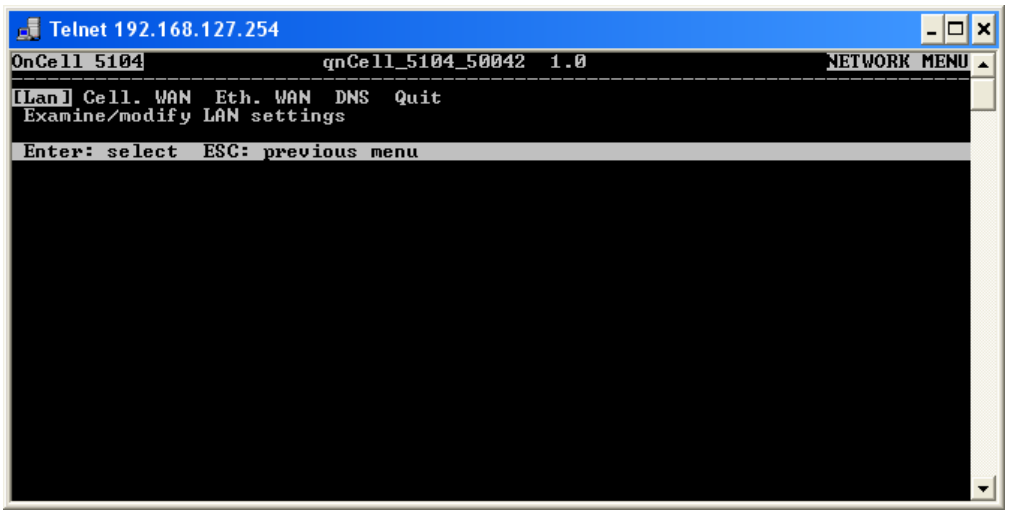
Telnet 192.168.127.254
OnCell 5104 qnCell_5104_50042 1.0 NETWORK MENU
[Lan] Cell. WAN Eth. WAN DNS Quit
Examine/modify LAN settings
Enter: select ESC: previous menu

6. Use the arrow keys to move the cursor to **IP address**. Use the **DELETE**, **BACKSPACE**, or **SPACE** keys to erase the current IP address, and then type in the new IP address and press **ENTER**. Note that if you are using a dynamic IP configuration (BOOTP, DHCP, etc.), you will need to go to the **IP configuration field** and press **ENTER** to select the appropriate configuration.

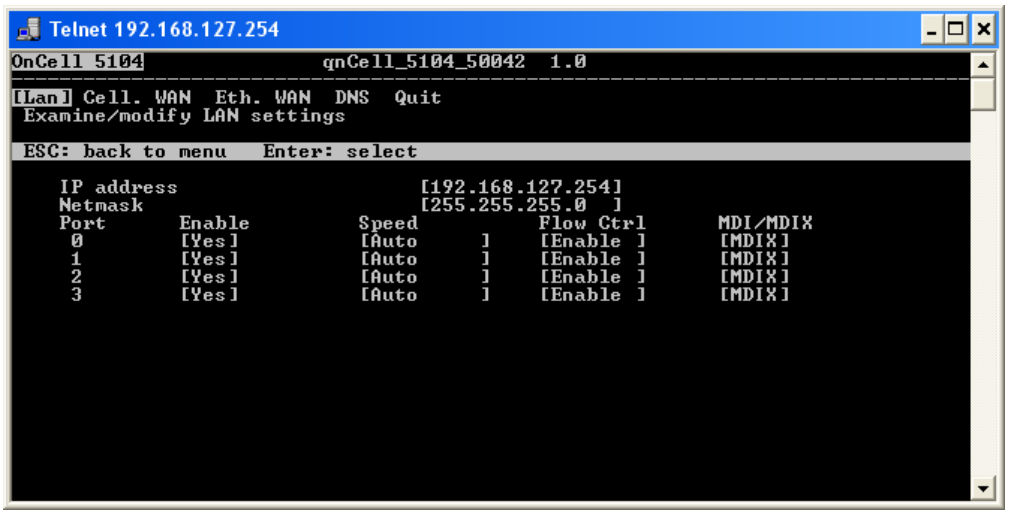
Telnet 192.168.127.254
OnCell 5104 qnCell_5104_50042 1.0
[Lan] Cell. WAN Eth. WAN DNS Quit
Examine/modify LAN settings
ESC: back to menu Enter: select
IP address [192.168.127.254]
Netmask [255.255.255.0]
Port Enable Speed Flow Ctrl MDI/MDIX
0 [Yes] [Auto] [Enable] [MDIX]
1 [Yes] [Auto] [Enable] [MDIX]
2 [Yes] [Auto] [Enable] [MDIX]
3 [Yes] [Auto] [Enable] [MDIX]

7. Press **ESC** twice to return to the previous page.

8. Press **A** or use the arrow keys to select **Save** and then press **ENTER**. Press **ENTER** again to confirm the save command.

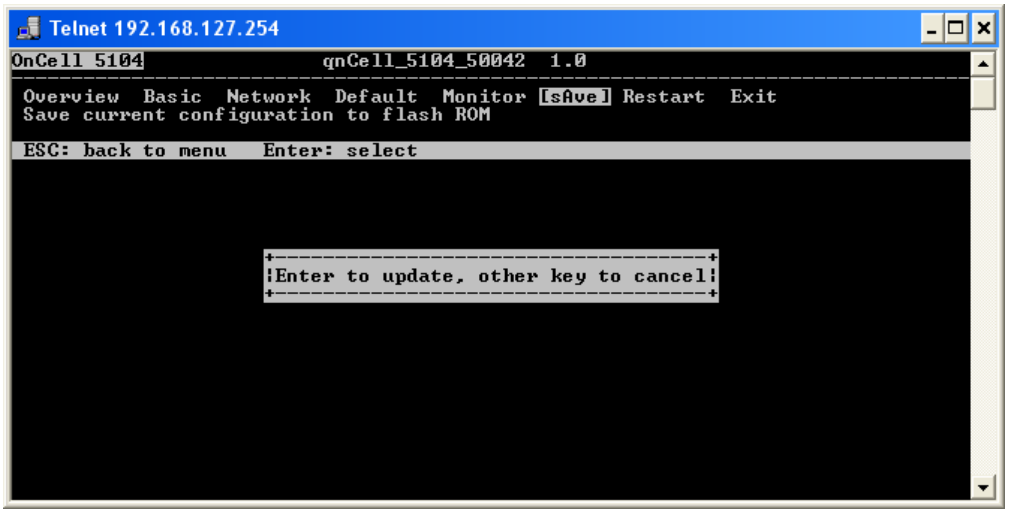
Telnet 192.168.127.254
OnCell 5104 qnCell_5104_50042 1.0
Overview Basic Network Default Monitor [sAve] Restart Exit
Save current configuration to flash ROM
ESC: back to menu Enter: select
Enter to update, other key to cancel

9. Press **R** or use the arrow keys to select **Restart** and then press **ENTER**. Press **ENTER** again to restart the OnCell 5000.

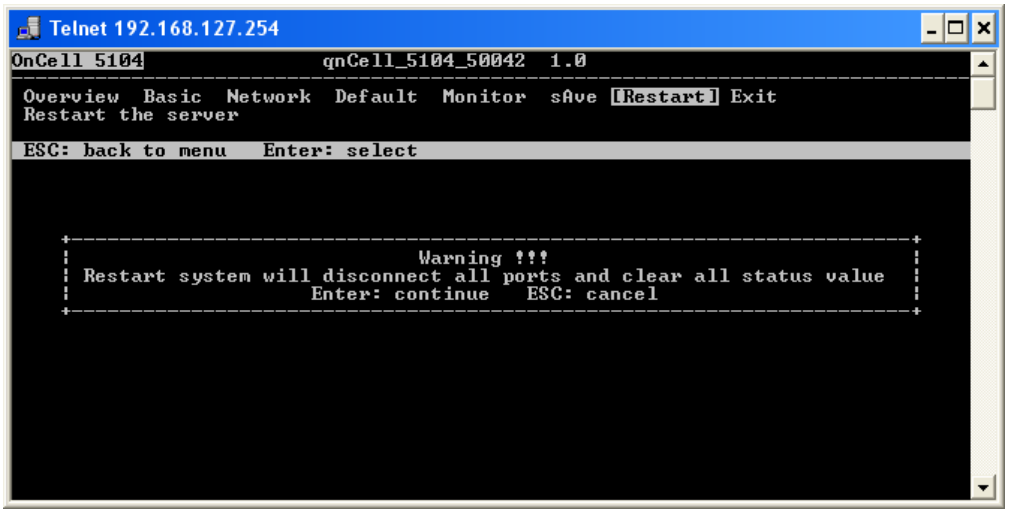
Telnet 192.168.127.254
OnCell 5104 qnCell_5104_50042 1.0
Overview Basic Network Default Monitor sAve [Restart] Exit
Restart the server
ESC: back to menu Enter: select
Warning !!!
Restart system will disconnect all ports and clear all status value
Enter: continue ESC: cancel

Serial Console

The OnCell 5000 can be configured through the serial console, which works the same as the Telnet console but is accessed through the RS-232 console port rather than over the network.

The following instructions and screenshots show how to enter the serial console using PComm Terminal Emulator, which is available free of charge as part of the PComm Lite suite. You may use a different terminal emulator utility, although the actual screenshots and procedure may vary slightly from the following instructions.

Before running PComm Terminal Emulator, use an RJ45 to DB9-F (or RJ45 to DB25-F) cable to connect the OnCell 5000's RS-232 console port to your PC's COM port (generally COM1 or COM2, depending on how your system is set up). After installing PComm Terminal Emulator, take the following steps to access the RS-232 console utility.

1. Turn off the OnCell 5000's power, and then use a serial cable to connect the OnCell 5000's serial console port to your computer's RS-232 serial port.
2. From the Windows desktop, select **Start → All Programs → PComm Lite → Terminal Emulator**.
3. The PComm Terminal Emulator window should appear. From the **Port Manager** menu, select **Open** (or click the **Open** icon).

4. The Property window opens automatically. Select the **Communication Parameter** tab, and then select the appropriate COM port for the connection (COM1 in this example). Configure the parameters to **115200** for Baud Rate, **8** for Data Bits, **None** for Parity, and **1** for Stop Bits.

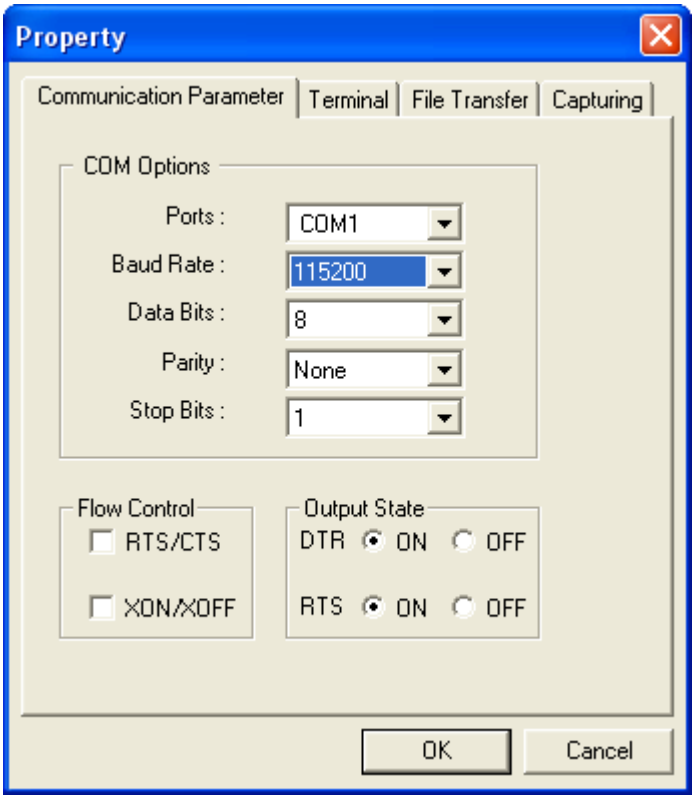

5. From the Property window's Terminal page, select **ANSI** or **VT100** for **Terminal Type** and then click **OK**.

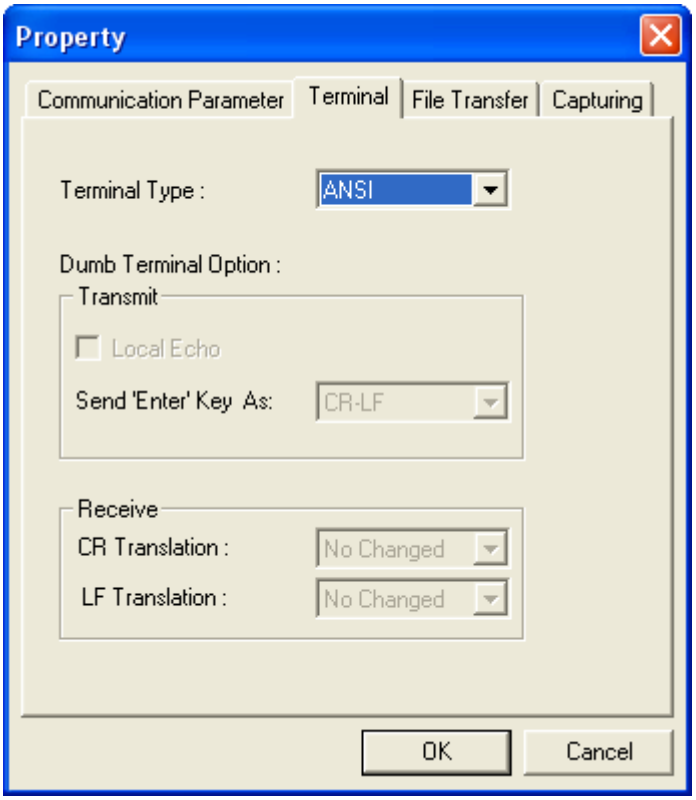

6. If the OnCell 5000 has been set up for password protection, you will be prompted to enter the password. After you enter the password, or if password protection was not enabled, you will be prompted to select the terminal mode. Press **1** for **ansi/vt100** and then press **ENTER**.

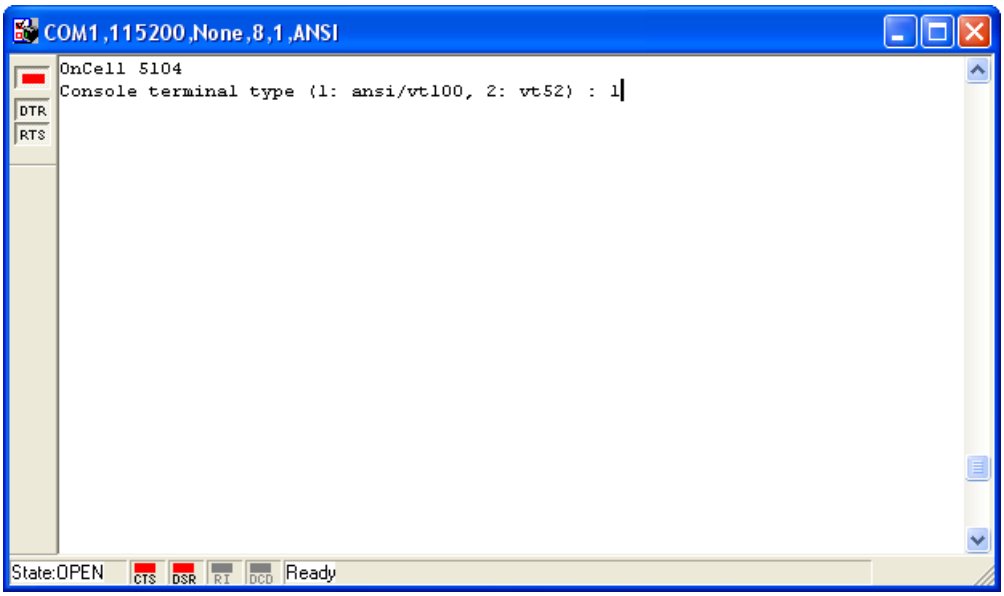

7. The main menu should appear. Once you are in the console, you may configure the IP address through the **Network** menu, just as with the Telnet console. Refer to steps 4 to 11 in the Telnet Console section to complete the initial IP configuration.

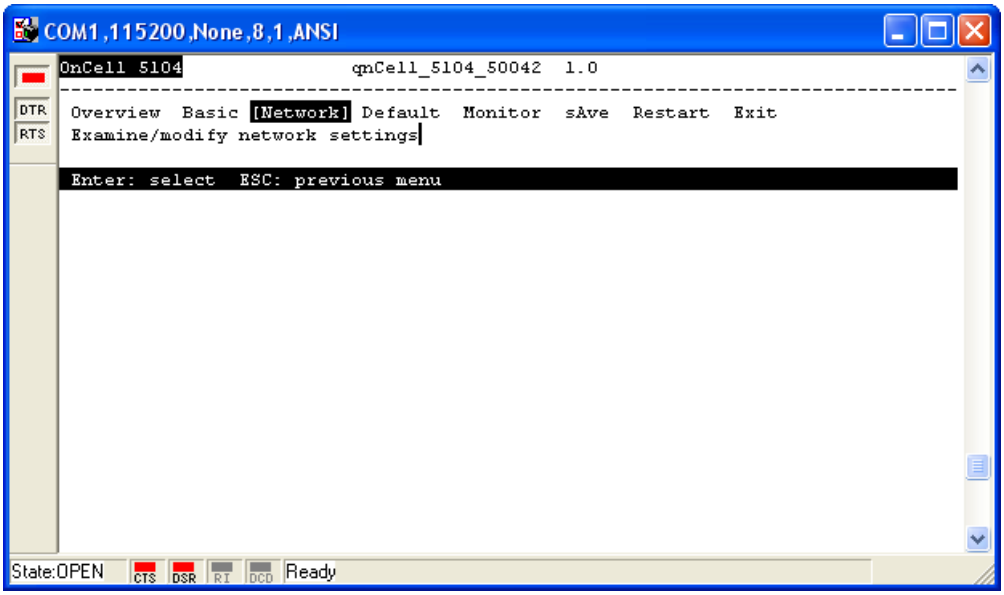

4

Web Console Configuration

In this chapter, we explain all aspects of the web-based console configuration utility. Moxa's easy-to-use management functions will help you set up your OnCell 5000 and allow you to maintain your wireless network easily.

The following topics are covered in this chapter:

- **Accessing the Web Console**
- **Web Console Navigation**
- **Basic Settings**
  - Device Settings
  - Time Settings
- **Network Settings**
  - LAN Settings
  - LAN Port Configuration
  - Cellular WAN Settings
  - GuaranLink Settings
  - Ethernet WAN Settings
  - DNS Settings
  - DHCP Settings
  - Auto IP Report
- **Advanced Network Settings**
  - Firewall Settings
  - WAN IP Filter
  - Route Table

Accessing the Web Console

Open your web browser and enter **192.168.127.254** in the website address line. This is the default IP address for the OnCell 5000—if a new address has been assigned, enter the new address instead. Press **ENTER** to load the page.

ATTENTION

The examples and figures in this chapter use the OnCell 5000 factory default IP address of 192.168.127.254. If you have assigned a different IP address to your OnCell 5000, you will need to use that IP address. Refer to *Chapter 3, Initial IP Address Configuration*, for details on how to configure the IP address.

Enter the console password if prompted. The password will be transmitted with MD5 encryption over the Internet to ensure that the password cannot be easily intercepted by eavesdroppers.

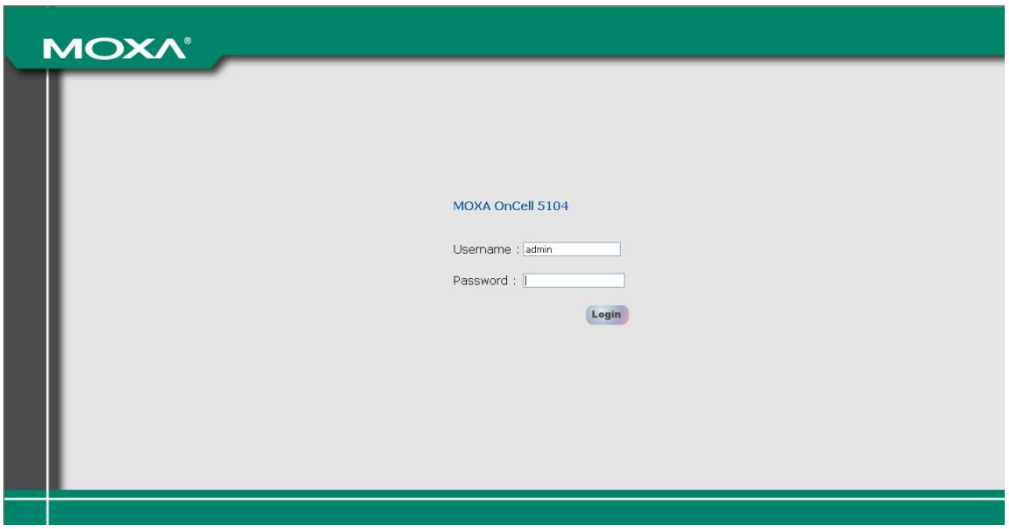

The OnCell 5000's web console will appear.

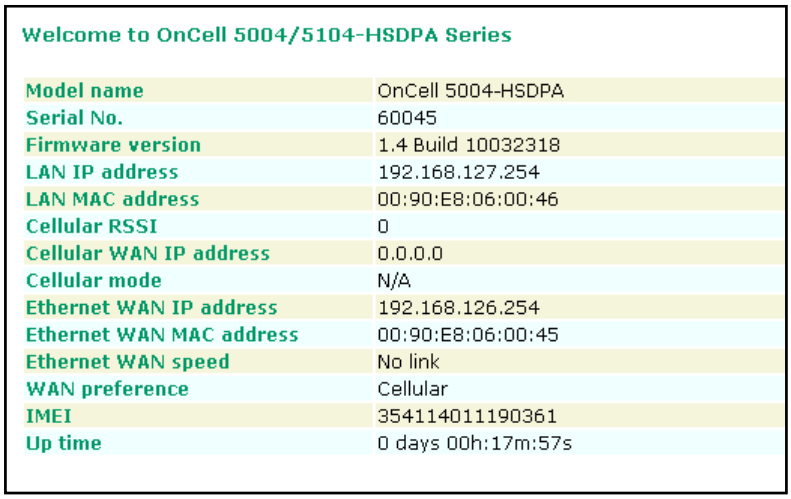

Welcome to OnCell 5004/5104-HSDPA Series

Model name	OnCell 5004-HSDPA
Serial No.	60045
Firmware version	1.4 Build 10032318
LAN IP address	192.168.127.254
LAN MAC address	00:90:E8:06:00:46
Cellular RSSI	0
Cellular WAN IP address	0.0.0.0
Cellular mode	N/A
Ethernet WAN IP address	192.168.126.254
Ethernet WAN MAC address	00:90:E8:06:00:45
Ethernet WAN speed	No link
WAN preference	Cellular
IMEI	354114011190361
Up time	0 days 00h:17m:57s

Web Console Navigation

The left panel of the OnCell 5000's web console is the navigation panel, and contains an expandable menu tree for navigating among the various settings and categories. When you click on a menu item in the navigation panel, the main window will display the corresponding options for that item. Configuration changes can then be made in the main window. For example, if you click on **Basic Settings** in the navigation panel, the main window will show a page of basic settings that you can configure.

You must click on the **Submit** button to keep your configuration changes. The **Submit** button is located at the bottom of every page that has configurable settings. If you navigate to another page without clicking the Submit button, your settings will be lost.

Changes will not take effect until they are saved and the OnCell is restarted! You may complete this in one step by clicking on the Save/Restart option after you submit a change. If you need to make several changes before restarting, you may save your changes without restarting by selecting **Save Configuration** in the navigation panel. If you restart the OnCell without saving your configuration, the OnCell will discard all submitted changes.

Basic Settings

The **Basic Settings** screen can be accessed from the navigation panel.

Device Settings

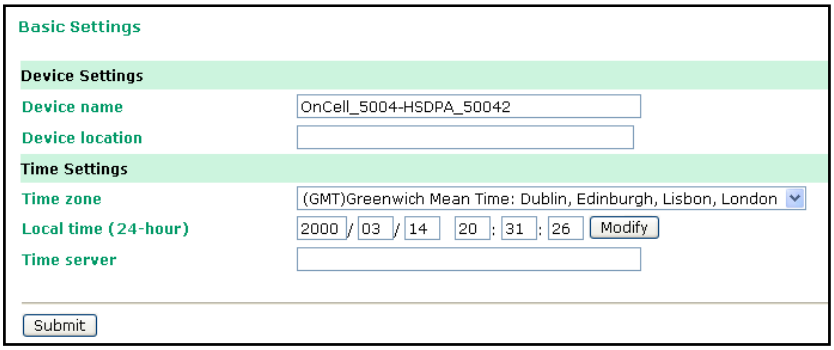

Device name: This is an optional text field for your own use; it does not affect the operation of the OnCell 5000, and can be used to help differentiate one OnCell 5000 device from another.

Device location: This is an optional text field for your own use; it does not affect the operation of the OnCell 5000, and is useful for assigning or describing the location of an OnCell 5000. If you need to manage multiple servers, you should use this field to indicate the precise physical location of each device.

Time Settings

The OnCell 5000 has a built-in Real-Time Clock for time calibration functions. Functions such as Auto Warning Email or SNMP Trap can add real-time information to messages.

Before making any adjustments to the time, first select the correct time zone and submit the change. The console will display the real time according to the time zone. To modify the real time clock, click on **Modify** next to the **Local time** field. Once you submit the new time, the OnCell 5000's firmware will modify the GMT time based on your time zone and local time settings.

ATTENTION

There is a risk of explosion if the real-time clock battery is replaced with the wrong type!
The OnCell 5000's real time clock is powered by a lithium battery. We strongly recommend that you do not attempt to replace the lithium battery without help from a qualified Moxa support engineer. If you need to change the battery, please contact the Moxa RMA service team.

Time zone (default=GMT Greenwich Mean Time): This field shows the currently selected time zone and allows you to select a different time zone.

Local time: This field shows the time that you last opened or refreshed the browser. To set the local time for the OnCell 5000, click on the Modify button, update the date and time, and then click on submit.

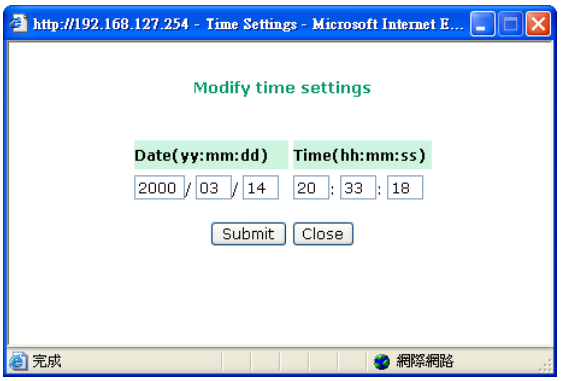

Time server: The OnCell 5000 uses SNTP (RFC-1769) for auto time calibration. You may enter a time server IP address or domain name in this optional field. Once the OnCell 5000 is configured with the correct time server address, it will request time information from the time server every 10 minutes.

Network Settings

LAN Settings

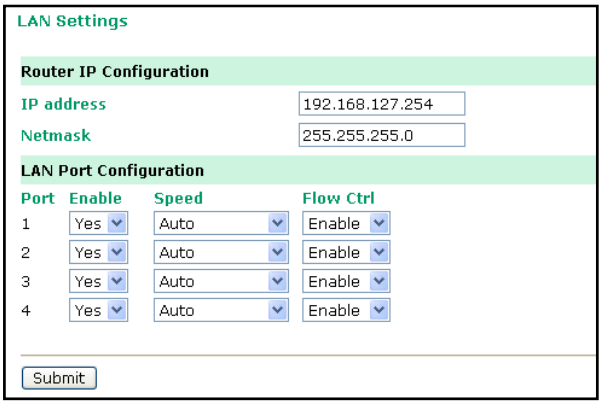

You can access **LAN Settings** by expanding the **Network Settings** item in the navigation panel. Use the LAN Settings page to assign the OnCell 5000's IP address, netmask, and other LAN Port configuration parameters.

Note: You must assign a valid IP address to your OnCell 5000 before it will work in your network environment. Your network system administrator should provide you with a unique IP address and related settings for your network. First-time users can refer to Chapter 3, Initial IP Address Configuration, for more information.

IP Address (default=192.168.127.254): Enter the IP address that is assigned to your OnCell 5000. All LAN ports on the OnCell 5000 will share this IP address. An IP address is a number assigned to a network device (such as a computer) as a permanent address on the network. Computers use the IP address to identify and talk to each other over the network. Choose a proper IP address that is unique and valid for your network environment.

Netmask (default=255.255.255.0): Enter the subnet mask. A subnet mask represents all of the network hosts at one geographic location, in one building, or on the same local area network. When a packet is sent out over the network, the OnCell 5000 will use the subnet mask to check whether the desired TCP/IP host specified in the packet is on the local network segment. If the address is on the same network segment as the OnCell 5000, a connection is established directly from the OnCell 5000. Otherwise, the connection is established through the given default gateway.

LAN Port Configuration

LAN Port Configuration settings are included to give the user control over Port Access, Port Transmission Speed, Flow Control, and Port Type (MDI or MDIX). An explanation of each configuration item is given below.

Enable (default=Yes):

Option	Description
Yes	Allows data transmission through the port.
No	Immediately shuts off port access.

Speed (default=Auto):

Option	Description
Auto	Allows the port to use the IEEE 802.3u protocol to negotiate with connected devices. The port and connected devices will determine the best speed for that connection.
10Mbps Half	Choose one of these fixed speed options if the opposing Ethernet device has trouble auto-negotiating for line speed.
10Mbps Full	
100Mbps Half	
100Mbps Full	

Flow Ctrl (default=Enable):

This setting enables or disables the flow control capability of this port when the “speed” setting is in “auto” mode. The final result will be determined by the “auto” process between the OnCell and connected device.

Option	Description
Enable	Enables the flow control capability of this port when in auto-nego mode.
Disable	Disables the flow control capability of this port when in auto-nego mode.

Cellular WAN Settings

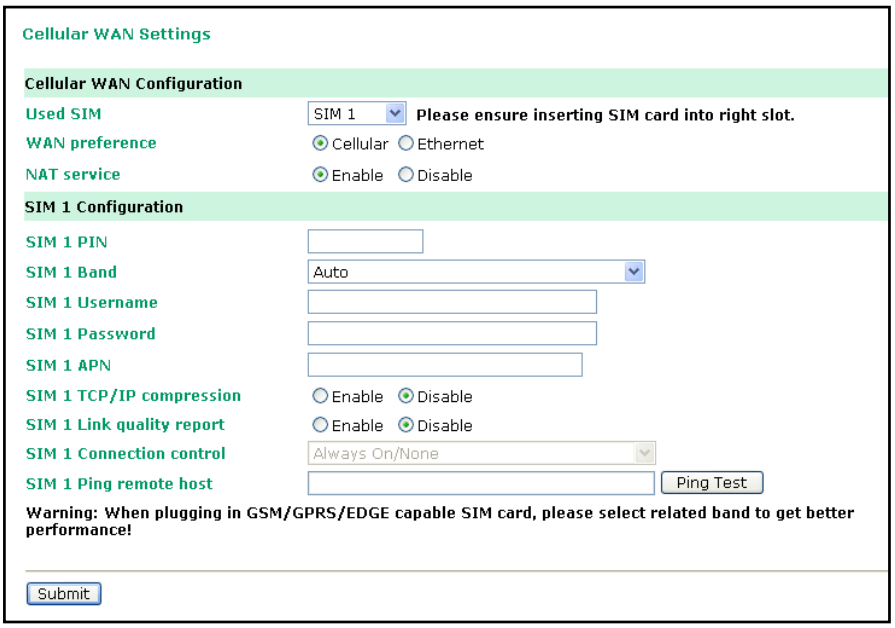

From the left navigation panel, click **Network Settings → Cellular WAN Settings** to configure the SIM card Settings. The various configuration items are described below:

WAN Preference (default=Cellular): Select either cellular or Ethernet. Note that the WAN preference option on the Ethernet WAN settings page (see below) will be updated automatically.

Note: You need to select one of the two WAN preferences. If the line is disconnected, the router will not automatically switch to the other WAN preference.

NAT service (default=Enable): If you Enable NAT service, LAN-side applications will be able to link to WAN-side applications.

Used SIM: Select the SIM card number that has been used, and please ensure inserting SIM card into right slot.

The following information is only show SIM 1 configuration, If SIM 2 available, please follow the same setting as well

SIM1 PIN: This is a pin code that locks the SIM card until you enter the correct code. Use the pin to protect your account. The default code is set by the Service Provider. Note that a cell phone must be used to change the PIN.

Band (default=Auto): The GSM/GPRS/EDGE/UMTS/HSDPA band will be detected automatically.

Username: This is the user ID account.

Password: This is the user password.

APN: Before using the GPRS, an APN (Access Point Name) must be configured as a modem initialization command.

TCP / IP compression (default=Disable): Use this field to indicate whether the remote user's application requests compression.

Link quality report (the default is set to "Disable"): Set this field to "Enable" for the following:

(1) Automatic disconnection if the link noise of the connection exceeds a user-defined threshold.

GuaranLink Settings

Overview

Connection failures of wireless connections can be caused by a number of different factors, including loss of cellular signal, interferences or termination by the operator for unknown reasons. Typically, cellular routers will not be alerted when a connection is terminated due to inactivity. And maintaining a stable cellular connection is important for a number of obvious reasons. This is why OnCell cellular routers offer the GuaranLink function, which ensures your wireless connection will be there whenever you need it.

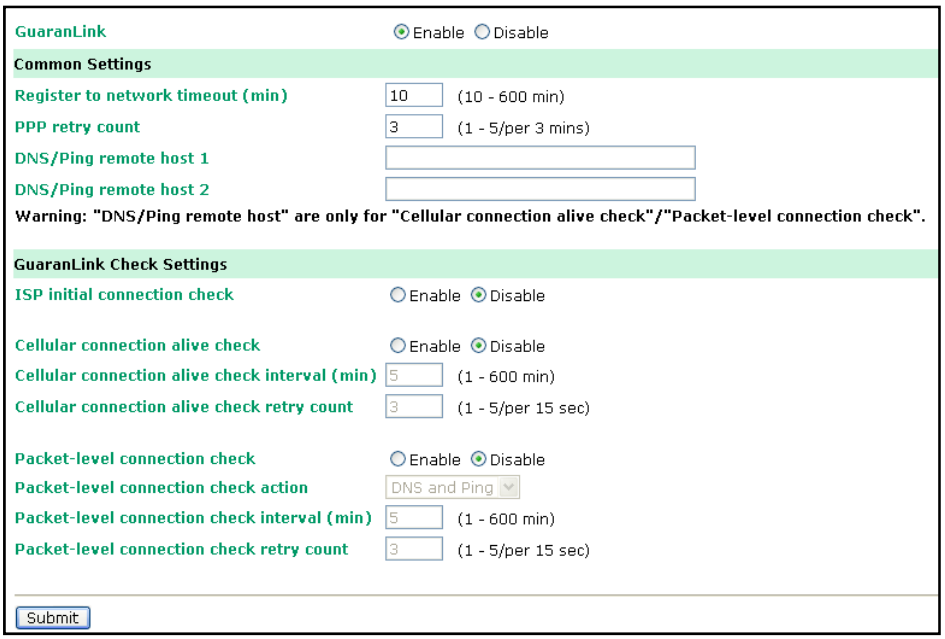

Background

1. "Register to network" and "Establish PPP with ISP" are two steps for establishing connection with the ISP.
2. If GuaranLink determines that the OnCell cannot establish connection with the ISP, it reboots the OnCell in order to allow the OnCell to retry the connection once rebooted.

Common Settings

- **GuaranLink (default=Disable):** Enable this setting to start the GuaranLink function.
- **Register to network timeout (min) (default=10):** This setting is to specify how long GuaranLink should wait to register to the network before the OnCell reboots itself.
- **PPP retry count (default=3 mins)** This setting is to specify how many times GuaranLink should retry to establish PPP with the ISP before OnCell reboots itself.
- **DNS/Ping remote host 1 and DNS/Ping remote host 2:** This setting is for "**Cellular connection alive check**" and "**Packet-level connection check**." It specifies the target host of the DNS lookup and Ping action. It could be either a domain name or an IP address.

GuaranLink Check Settings

- **ISP initial connection check (default=Disable):** This function is to ensure that the OnCell can establish connection with an ISP after it reboots.
- **Cellular connection alive check (default=Disable):** Some ISPs may disable the connection if there is no data transmitted in a specific period of time, depending on the ISP's settings. This function ensures that the cellular connection will be kept alive even if no data is transmitted for a period of time by performing the check action of DNS lookup or ping action of DNS/Ping remote host 1 or DNS/Ping remote host 2. If the check action fails after the retry count number specified in "Cellular connection alive check retry count", the OnCell will re-establish a connection with the ISP.
- **Cellular connection alive check interval (min) (default=5 min):** This setting specifies the idle time before GuaranLink performs the check action.
- **Cellular connection alive check retry count (default=3 sec):** This setting specifies the number of attempts to reach the remote target(s) before the OnCell re-establishes a connection.
- **Packet-level connection check (default=Disable):** This function checks if the cellular network can be accessed by performing the check action of lookup DNS or ping action of DNS/Ping remote host 1 or DNS/Ping remote host 2. If the check action fails after the retry count number specified in "Packet-level connection check retry count." the OnCell will re-establish a connection with ISP.
- **Packet-level connection check action (default=DNS and PING):** This setting specifies whether the check action is successful when both of the DNS lookup and the ping action succeed, or if it is successful even if only one of them succeed.
- **Packet-level connection check interval (min) (default=5 min):** This setting specifies the interval between two check actions.
- **Packet-level connection check retry count (default=3 sec):** This setting specifies the number of attempts to reach the remote target(s) before the OnCell re-establishes a connection.

Ethernet WAN Settings

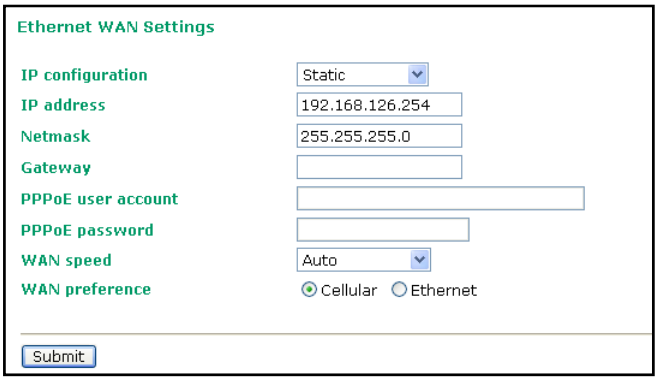

You can access **Network Settings → Ethernet WAN Settings** by expanding the item in the navigation panel. Ethernet WAN Settings is where you assign the OnCell 5000's IP address, netmask, Gateway, and other parameters for the Ethernet interface.

Note: You must assign a valid WAN IP address to your OnCell 5000 before it will work in your network environment. Your network system administrator should provide you with a unique IP address and related settings for your network.

IP configuration (default=Static): You can choose from four possible IP configuration modes:

Mode	Description
Static	User-defined IP address, netmask, and gateway
DHCP	DHCP server-assigned IP address, netmask, gateway, and DNS
PPPoE	Your ISP will provide you with a username and password. This option is typically used for DSL services
DHCP/BOOTP	DHCP server-assigned IP address, netmask, gateway, and DNS, or BOOTP server-assigned IP address (if the DHCP server does not respond)
BOOTP	BOOTP server-assigned IP address

IP Address (default=192.168.126.254): Enter the WAN IP address that the OnCell 5000 will use to connect to the internet.

Netmask (default=255.255.255.0): Enter the subnet mask. A subnet mask represents all of the network hosts at one geographic location, in one building, or on the same local area network. When a packet is sent out over the network, the OnCell 5000 will use the subnet mask to check whether the desired TCP/IP host specified in the packet is on the local network segment. If the address is on the same network segment as the OnCell 5000, a connection is established directly from the OnCell 5000. Otherwise, the connection is established through the given default gateway.

Gateway: Enter the IP address of the gateway if applicable. A gateway is a network computer that acts as an entrance to another network. Usually, the computers that control traffic within the network or at the local Internet service provider are gateway nodes. The OnCell 5000 needs to know the IP address of the default gateway computer in order to communicate with the hosts outside the local network environment. For correct gateway IP address information, consult the network administrator.

PPPoE user account: If your ISP uses a PPPoE connection, enter the user account name here. This option is typically used for DSL services.

PPPoE password: Enter your password.

WAN speed (default=Auto):

Option	Description
Auto	Allows the port to use the IEEE 802.3u protocol to negotiate with connected devices. The port and connected devices will determine the best speed for that connection.
10Mbps Half	Choose one of these fixed speed options if the opposing Ethernet device has trouble auto-negotiating for line speed.
10Mbps Full	
100Mbps Half	
100Mbps Full	

WAN Preference (default=Cellular): You must select either one of the WAN interface for data transmission. Note that the WAN preference option on the Cellular WAN settings page (see above) will be updated automatically.

Note: You need to select one of the two WAN preferences. If the line is disconnected, the router will not automatically switch to the other WAN preference.

DNS Settings

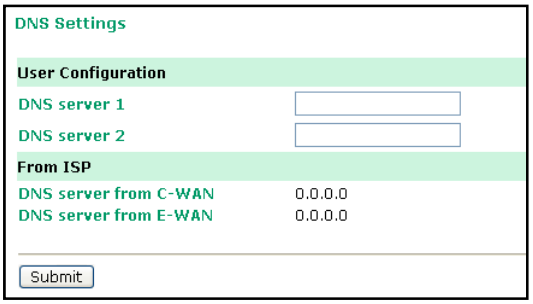

DNS server 1: This is an optional field since the DNS server automatically obtains the DNS server's IP address from C-WAN OR E-WAN. If your network has access to a DNS server, you may choose to enter the DNS server's IP address in this field. This allows the OnCell 5000 to use domain names instead of IP addresses to access hosts.

The Domain Name System (DNS) is used to identify Internet domain names and to translate the names into IP addresses. A domain name is an alphanumeric name, such as www.moxa.com, that it is usually easier to remember than the numeric IP address. A DNS server is a host that translates this kind of text-based domain name into the actual IP address used to establish a TCP/IP connection.

When the user wants to visit a particular website, the user's computer sends the domain name (e.g., www.moxa.com) to a DNS server to request that website's numeric IP address. When the IP address is received from the DNS server, the user's computer uses that information to connect to the website's web server. The OnCell 5000 plays the role of a DNS client, in the sense that it actively queries the DNS server for the IP address associated with a particular domain name. The following functions in the OnCell 5000's web console support the use of domain names in place of IP addresses: Time Server, Destination IP Address (in TCP Client mode), Mail Server, SNMP Trap Server, and SMTP Server.

DNS server 2: This is an optional field. The IP address of another DNS server may be entered in this field for times when DNS server 1 is unavailable.

DNS server form C-WAN: Normally, the DNS server's IP address is automatically obtained through the cellular network. The OnCell will use the DNS server's C-WAN or E-WAN's IP address as its first priority.

DNS server form E-WAN: Normally, the DNS server's IP address is automatically obtain through the Ethernet network. The OnCell will use the DNS server's C-WAN or E-WAN's IP address as its first priority.

DHCP Settings

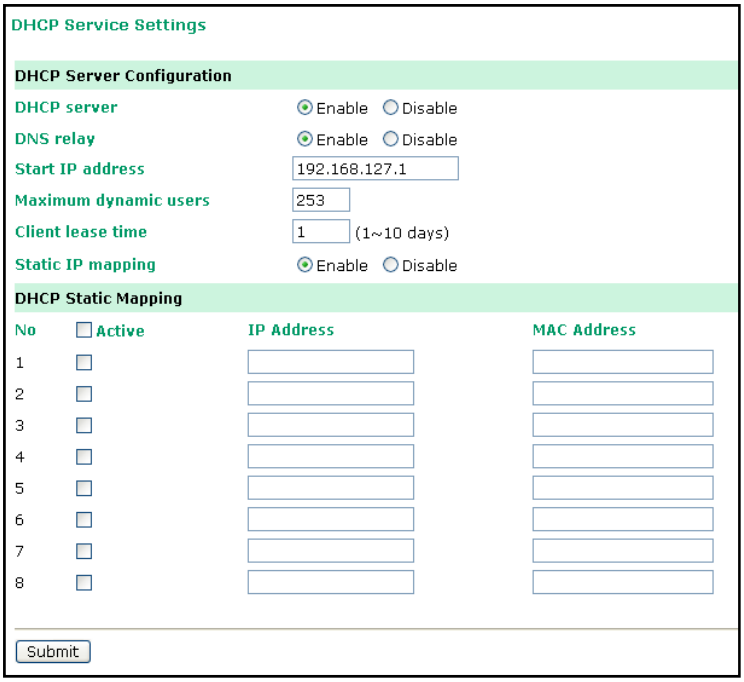

DHCP (default=Enable): DHCP stands for Dynamic Host Control Protocol. When you enable the DHCP Server, it will automatically assign an IP address to the computers on the LAN/private network. Be sure to set your computers to be DHCP clients by setting their TCP/IP settings to "Obtain an IP Address Automatically." When you turn your computers on, they will automatically load the proper TCP/IP settings provided by the OnCell 5000. The DHCP Server will automatically allocate an unused IP address from the IP address pool to the requesting computer. You must specify the starting and ending address of the IP address pool.

DNS relay (default=Enable): If enabled, your computers will use the router as a DNS server. If disabled, the DNS server information will be transferred from your ISP to your computers.

Start IP address: Enter the starting IP addresses for the DHCP server's IP assignment.

Note: If you assign static IP addresses to your computers or devices, make sure the IP addresses are outside of this range or you may have an IP conflict.

Client lease time: The length of time for the IP address lease. Enter the Lease time in days.

Static IP mapping: If enabled, the mapping list allows you to assign specific IP addresses to specific MAC addresses, provided the IP addresses are in the range specified under DHCP Server Configuration.

Auto IP Report

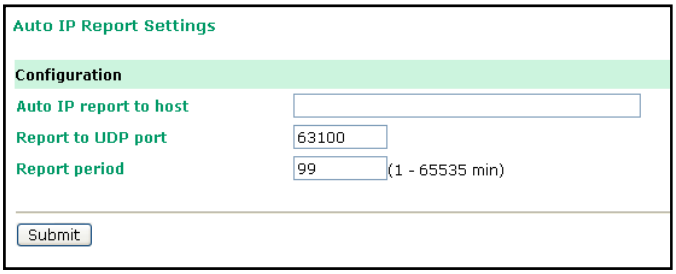

Auto IP report to host: Reports generated by the Auto report function will be sent automatically to this IP address or host name.

Report to UDP port (default=63100): This is the UDP port number assignment for the serial port on the OnCell 5000.

Report period (default=99): You can use this option to set the automatic report time.

Advanced Network Settings

Firewall Settings

Virtual Server Settings

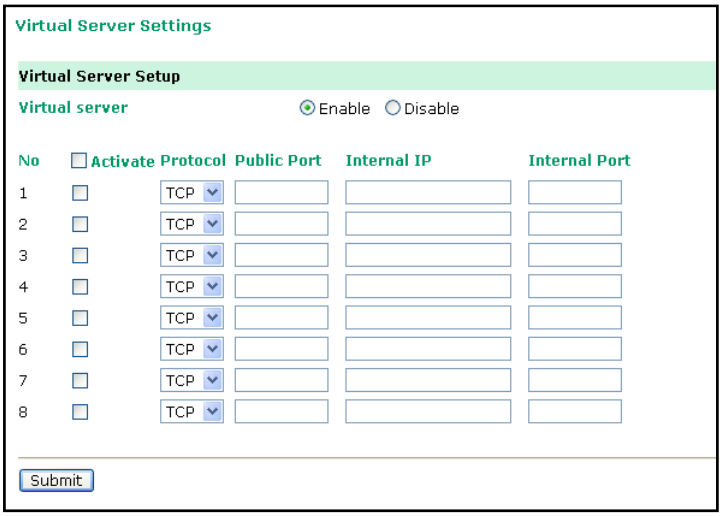

Virtual Server Settings (default=Disable): This function allows remote users to access the Host or FTP services via a public IP address, and automatically redirects them to local servers in the LAN (Local Area Network).

The OnCell firewall feature filters out unrecognized packets to protect your LAN network when computers networked with the OnCell are hidden from public view. If you wish, you can make some of the LAN computers accessible from the Internet by enabling Virtual Server. Depending on the requested service, the OnCell redirects the external service request to the appropriate server within the LAN network.

The OnCell is also capable of port-redirection, which means that traffic coming in to a particular port may be redirected to a different port on the server computer.

Public Port: The public port is the port seen from the Internet side.

Internal IP: Enter the IP address of the host on your local network that you want to link the incoming service to.

Internal Port: The internal port is the port being used by the application on the host within your local network.

WAN IP Filter

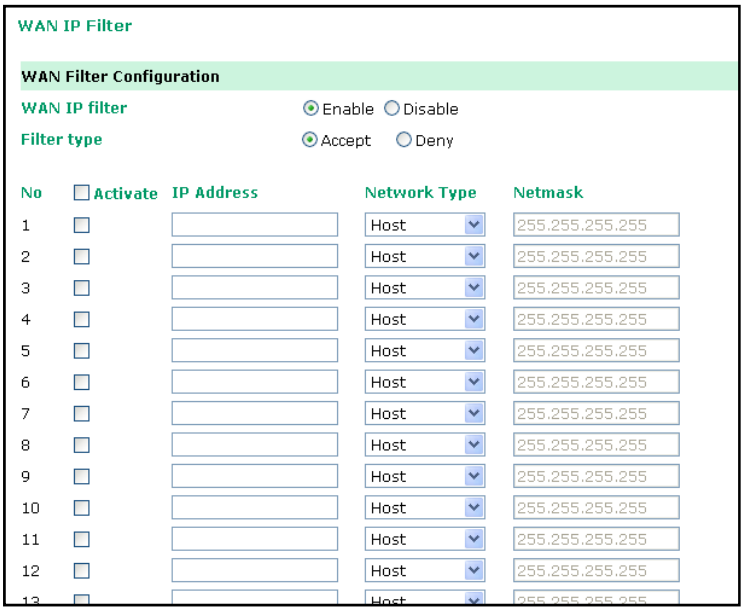

The OnCell 5000 uses an IP address-based filtering method to control access to its Ethernet ports. The WAN IP Filter allows you to restrict network access to the OnCell 5000. Access is controlled by IP address. When the WAN IP Filter list is enabled, a WAN's IP address must be listed in order to gain access to the OnCell 5000. You may add a specific address or range of addresses by using a combination of IP address and netmask, as follows:

Filter Type: If you select Accept, the WAN IPs that you enter will be allowed to access the OnCell 5000. If you select Deny, the WAN IPs that you enter will be denied access to the OnCell 5000.

IP Address: This is the WAN IP address or cellular network address that you would like to filter.

Netmask type: Commonly used network classes are indicated below:

Network Type	Netmask
Host	255.255.255.255
Class A	255.0.0.0
Class B	255.255.0.0
Class C	255.255.255.0
User Define	---

Netmask: This is the destination network's netmask.

Route Table

You can access the **Route Table** by expanding **Advanced Network Settings** in the navigation panel. Use the route table to configure how the OnCell 5000 will connect to an outside network.

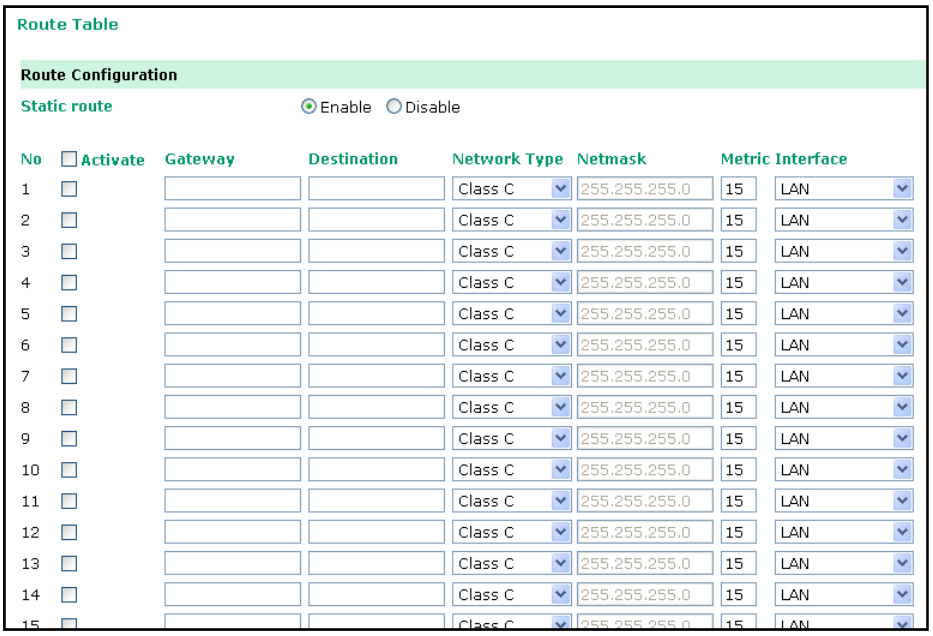

You are allowed up to 16 entries in the route table. For each entry, you must provide the gateway, destination, netmask type, netmask, metric hops, and interface.

Gateway: This is the IP address of the next-hop router.

Destination: This is the host's IP address or the network address of the route's destination.

Netmask type: Commonly used network classes are indicated below:

Network Type	Netmask
Host	255.255.255.255
Class A	255.0.0.0
Class B	255.255.0.0
Class C	255.255.255.0
User Define	–

Netmask: This is the destination network's netmask.

Metric: You may use this optional field to enter the number of hops from the source to the destination. This allows the OnCell 5000 to prioritize the routing of data packets if there is more than one router available to reach a given destination.

Interface: This is the network interface to which the packet must be sent.

5

System Management Settings

In this chapter, we describe the OnCell 5000's system management settings. The same configuration options are also available through the Telnet and serial console.

The following topics are covered in this chapter:

- **Misc. Network Settings**
  - SNMP Agent Settings
  - DDNS Configuration
- **Auto Warning Settings**
  - Event Settings
  - E-mail Alert
  - SNMP Trap
  - SMS Alert
- **Maintenance**
  - Console Settings
  - PING Test
  - System Log Settings
  - Firmware Upgrade
  - Configuration Import/Export
  - Load Factory Defaults
  - Change Password
- **Certificate**
  - Ethernet SSL Certificate Import
  - Certificate/Key Delete
- **System Monitoring**
  - Network Connections
  - Network Statistics
  - Routing
  - DHCP Client List
  - Internet Sessions List
  - System Log
  - Dout State
  - Din and Power Status
- **Save Configuration**
- **Restart**
  - Restart System

Misc. Network Settings

SNMP Agent Settings

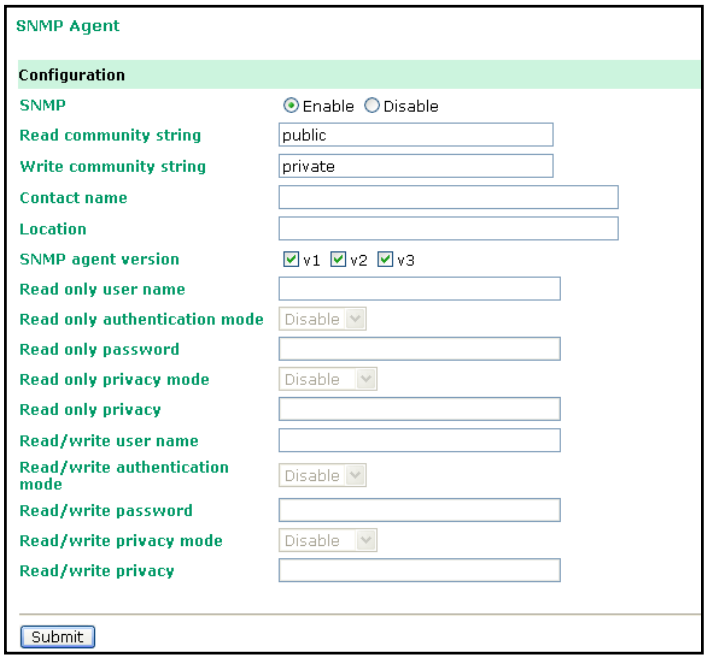

SNMP: To enable the SNMP Agent function, select the **Enable** option, and enter a community name (e.g., **public**).

Read community string (default=public): This is a text password that is used to weakly authenticate queries to agents of managed network devices.

Write community string (default=private): This is a text password that is used to weakly authenticate changes to agents of managed network devices.

Contact name: The optional SNMP contact information usually includes an emergency contact name and telephone or pager number.

Location: Use this optional field to specify the location string for SNMP agents such as the OnCell 5000. This string is usually set to the street address where the OnCell 5000 is physically located.

SNMP agent version: The OnCell 5000 supports SNMP V1, V2, and V3.

Read-only and Read/Write Access Control

The following fields allow you to define user names, passwords, and authentication parameters for two levels of access: read-only and read/write. The name of the field will indicate which level of access it refers to. For example, **Read only** authentication mode allows you to configure the authentication mode for read-only access, whereas **Read/write** authentication mode allows you to configure the authentication mode for read/write access. For each level of access, you may configure the following:

User name: Use this optional field to identify the user name for the specified level of access.

Authentication mode (default=Disable): Use this field to select MD5 or SHA as the method of password encryption for the specified level of access, or to disable authentication

Privacy mode (default=Disable): Use this field to enable or disable DES_CBC data encryption for the specified level of access.

Password: Use this field to set the password for the specified level of access.

Privacy: Use this field to define the encryption key for the specified level of access.

DDNS Configuration

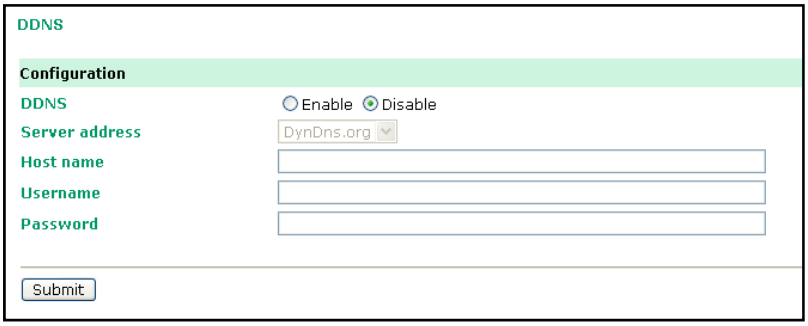

DDNS (default=Enable): The Dynamic Domain Name System is a method of keeping a domain name linked to a changing IP Address. Check the box to enable DDNS.

Server address: Choose your DDNS provider from the drop down menu.

Host name: Enter the Host Name that you registered with your DDNS service provider.

Username: Enter the Username for your DDNS account.

Password: Enter the Password for your DDNS account.

Auto Warning Settings

Event Settings

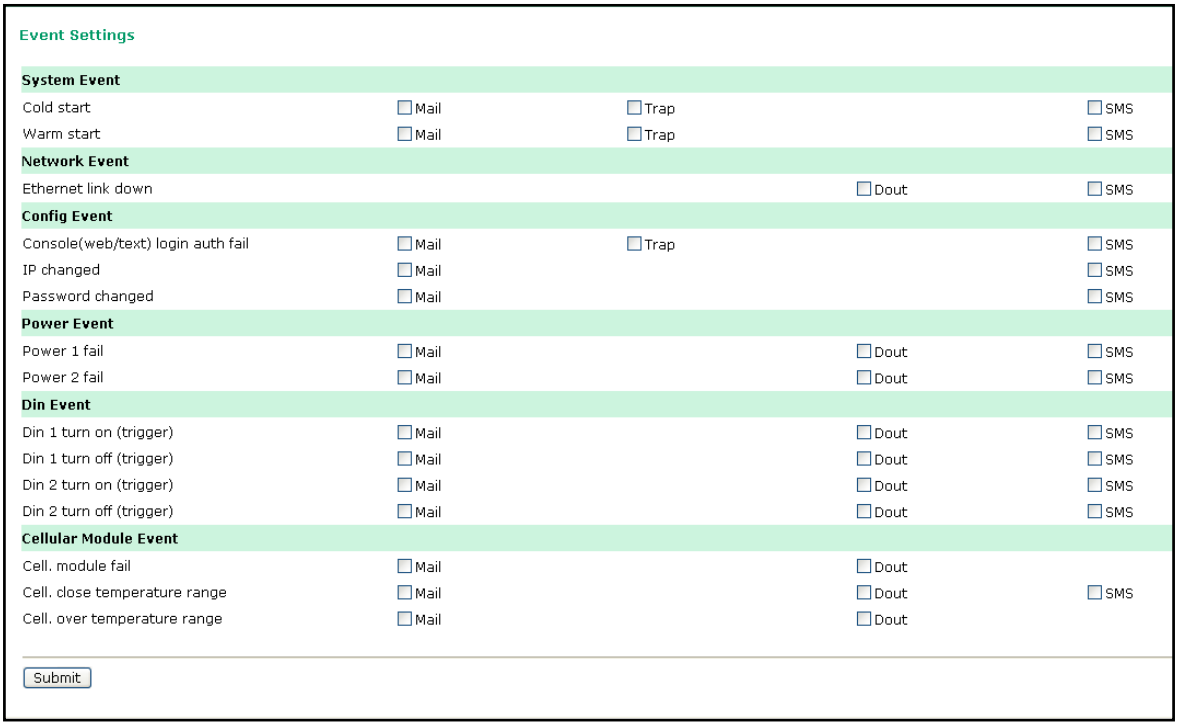
Event Settings
System Event
Cold start Mail Trap SMS
Warm start Mail Trap SMS
Network Event
Ethernet link down Dout SMS
Config Event
Console(web/text) login auth fail Mail Trap SMS
IP changed Mail SMS
Password changed Mail SMS
Power Event
Power 1 fail Mail Dout SMS
Power 2 fail Mail Dout SMS
Din Event
Din 1 turn on (trigger) Mail Dout SMS
Din 1 turn off (trigger) Mail Dout SMS
Din 2 turn on (trigger) Mail Dout SMS
Din 2 turn off (trigger) Mail Dout SMS
Cellular Module Event
Cell. module fail Mail Dout
Cell. close temperature range Mail Dout SMS
Cell. over temperature range Mail Dout
Submit

On the Event Settings page, you may configure how administrators are notified of certain system, network, configuration, power, Din, and cellular module events. Depending on the event, different options for automatic notification are available, as shown above. **Mail** refers to sending an e-mail to a specified address. **Trap** refers to sending an SNMP Trap. **Dout** is available on the network, power, Din, and cellular module event. **SMS** refers to sending a message to a specified phone number.

NOTE If you select "enable for SMS," the receiver will receive the message in the following format:

[modelName] alert (S/N: [serial number], LAN: [LAN IP], [LAN MAC Address]): (C-WAN/E-WAN/P-WAN: [WAN IP]): (yyyy-mm-dd hh:mm:ss) [message]

C-WAN: x.x.x.x indicates the cellular WAN IP address
E-WAN: x.x.x.x indicates the Ethernet WAN IP address and "P-WAN: x.x.x.x" indicates the preferred WAN IP address.

Cold start: This refers to starting the system from a power off state, or after upgrading the firmware

Warm start: This refers to restarting the OnCell 5000 without turning the power off.

Ethernet link down: These settings configure the OnCell 5000 to change the status of the relay output and SMS if the specified connection goes down.

Console (web/text) login authentication failure: This field refers to failed attempts to log in to a WEB/Console/Telnet/OnCell Central using a password.

IP changed: With this IP address change, the OnCell 5000 will send an email or SMS warning after it reboots.

Password changed: With this option selected, the OnCell 5000 will attempt to send an e-mail or SMS warning after it reboots with a new console password. If the OnCell 5000 is unable to send an e-mail or SMS message to the mail server within 15 seconds, it will still reboot without sending the e-mail or SMS.

Power event: The OnCell 5000 provides two DC power inputs for redundancy. If either power fails, the OnCell 5000 will attempt to send an e-mail warning, relay output, or SMS.

Din event: When the status of digital input 1 or 2 is changed, the OnCell 5104 series will attempt to send an e-mail, trigger the digital output, or send an SMS.

Cell. module fail: When the cellular module fails to function, the OnCell 5000 will attempt to send an e-mail, or trigger the digital output to inform users.

Cell. close temperature range: When the temperature on the cellular module inside the OnCell 5000 is close to the upper or lower limit, the OnCell 5000 will attempt to send an e-mail, trigger the digital output, or send an SMS message to inform users.

Cell. over temperature range: When the temperature on the cellular module inside the OnCell 5000 is outside the normal temperature range, the OnCell 5000 will attempt to send an e-mail, or trigger the digital output to inform users.

E-mail Alert

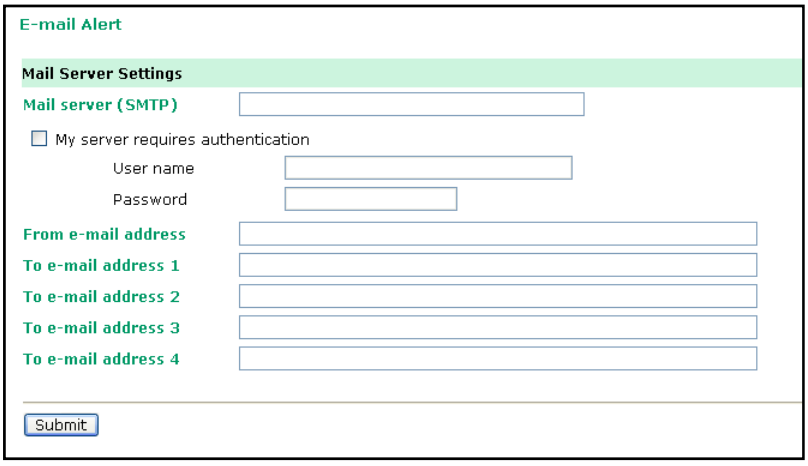

The E-mail Alert settings determine how e-mail warnings are sent for system and serial port events. You may configure up to 4 e-mail addresses to receive automatic warnings.

ATTENTION

Consult your Network Administrator or ISP for the proper mail server settings. The Auto warning function may not work properly if it is not configured correctly. The OnCell 5000's SMTP AUTH supports LOGIN, PLAIN, and CRAM-MD5 (RFC 2554).

Mail server: This field is for your mail server's domain name or IP address.

User name: This field is for your mail server's user name, if required.

Password: This field is for your mail server's password, if required.

From e-mail address: This is the e-mail address from which automatic e-mail warnings will be sent.

To e-mail address 1 to 4: This is the e-mail address or addresses to which the automatic e-mail warnings will be sent.

SNMP Trap

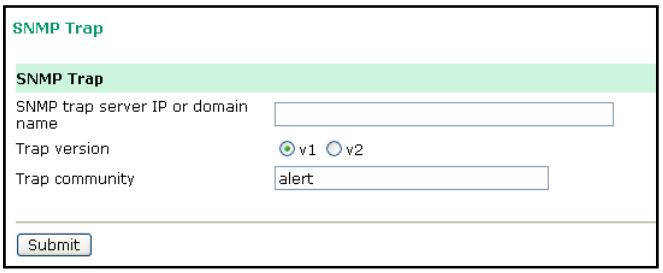

SNMP trap server IP: Use this field to indicate the IP address to use for receiving SNMP traps.

Trap version (default=v1): Use this field to select the SNMP trap version.

Trap community (default=alert): Use this field to designate the SNMP trap community.

SMS Alert

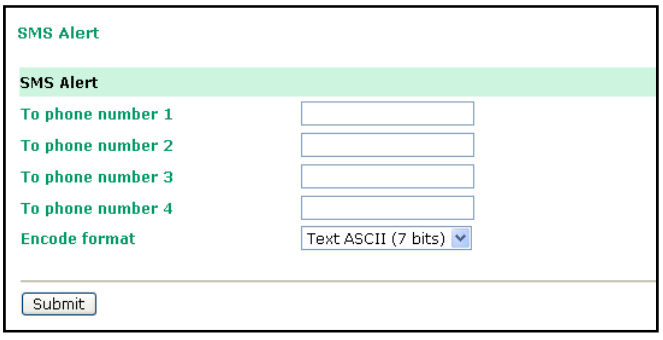

To phone number 1 to 4: This is the phone number to which the automatic warnings message will be sent.

Encode format:

SMS Data Format	
Text ASCII (7 bits) (default)	7 bits text format (160 bytes per packet)
Binary	8 bits binary (140 bytes per packet)
Unicode	16 bits Unicode (UCS2) format (70 bytes per packet)

Maintenance

Console Settings

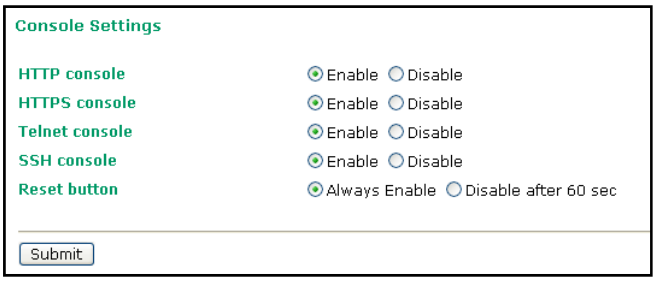

On this screen, access to different OnCell 5000 configuration console options (HTTP, HTTPS, Telnet, SSH) can be enabled or disabled. Refer to Change Password later in this chapter for more information on passwords.

Reset button (default=Always Enable): Select "Always Enable" to activate the reset button. Use the "Disable after 60 sec" option to avoid resetting the server when the reset button is pressed accidentally.

PING Test

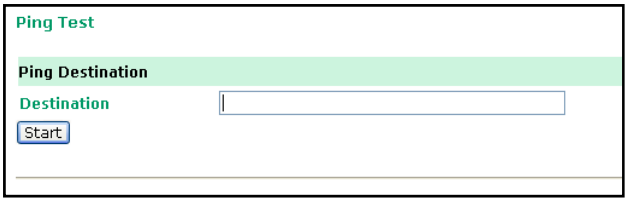

You can ping an IP address from the OnCell 5000 web console in order to test the Ethernet connection. Enter the IP address or domain name in the **Destination** field to make sure the connection is OK.

System Log Settings

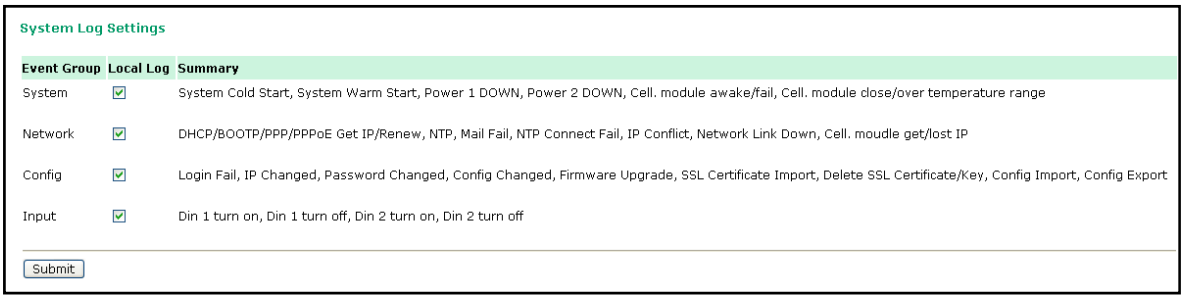
System Log Settings
Event Group
Local Log
Summary
System
System Cold Start, System Warm Start, Power 1 DOWN, Power 2 DOWN, Cell. module awake/fail, Cell. module close/over temperature range
Network
DHCP/BOOTP/PPP/PPPoE Get IP/Renew, NTP, Mail Fail, NTP Connect Fail, IP Conflict, Network Link Down, Cell. moudle get/lost IP
Config
Login Fail, IP Changed, Password Changed, Config Changed, Firmware Upgrade, SSL Certificate Import, Delete SSL Certificate/Key, Config Import, Config Export
Input
Din 1 turn on, Din 1 turn off, Din 2 turn on, Din 2 turn off
Submit

System Log Settings allows the administrator to customize which network events are logged by the OnCell 5000. Events are grouped into five categories, known as event groups, and the administrator selects which groups to log under Local Log. The actual system events that would be logged for each system group are listed under summary. For example, if **System** was enabled, then System Cold Start events and System Warm Start events would be logged.

Group	Event
System	System Cold Start, System Warm Start, Power 1 DOWN, Power 2 DOWN, Cell. module awake/fail, Cell. module close/over temperature range
Network	DHCP/BOOTP Get IP/Renew, NTP, Mail Fail, NTP Connect Fail, IP Conflict, Network Link Down, Cell. module get/lost IP
Config	Login Fail, IP Changed, Password Changed, Config Changed, Firmware Upgrade, SSL Key Import, Config Import, Config Export
Input	Din 1 turn on, Din 1 turn off, Din 2 turn on, Din 2 turn off

Firmware Upgrade

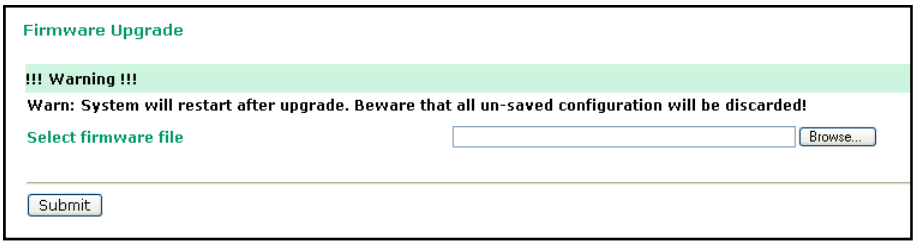
Firmware Upgrade
!!! Warning !!!
Warn: System will restart after upgrade. Beware that all un-saved configuration will be discarded!
Select firmware file
Browse...
Submit

The OnCell 5000's firmware can be upgraded though the web console or the OnCell Search Utility. If you have made any changes to your configuration, remember to save the configuration first before upgrading the firmware. Please refer to Save Configuration later in this chapter for more information. Any unsaved changes will be discarded when the firmware is upgraded. To upgrade the firmware, simply enter the file name and click **Submit**. The latest firmware can be downloaded from www.moxa.com.

Configuration Import/Export

The OnCell 5000 can share or back up its configuration by exporting all settings to a file.

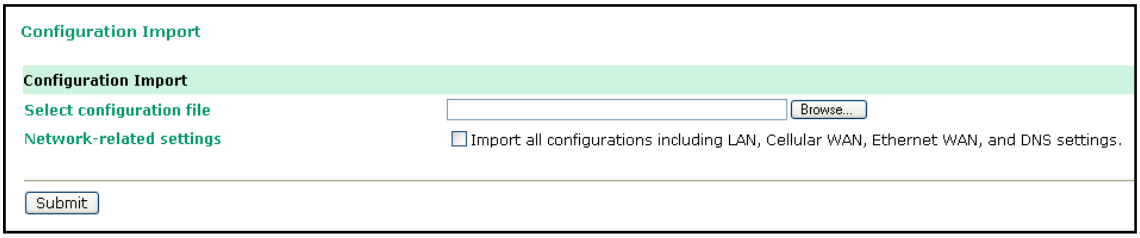

To import a configuration, go to **System Management → Maintenance → Configuration Import**. Enter the configuration file path/name and click Submit. The OnCell 5000's configuration settings will be updated according to the configuration file. If you also wish to import the IP configuration (i.e., the OnCell 5000's IP address, netmask, gateway, etc.), make sure that **Import all configurations including IP configurations** is checked.

To export a configuration, go to **System Management → Maintenance → Configuration Export** and click **Download**. A standard download window will appear to allow you to download the configuration into a file and location of your choice.

Load Factory Defaults

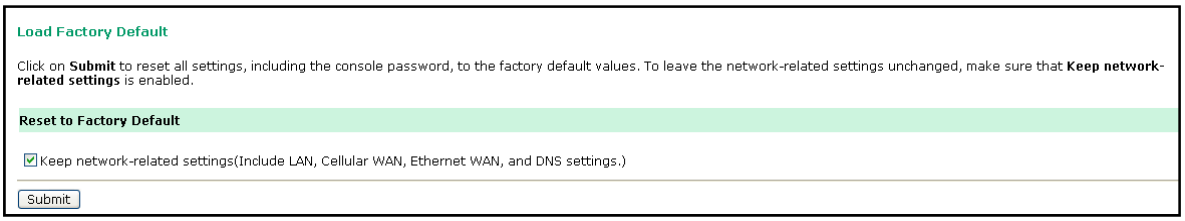
Load Factory Default
Click on Submit to reset all settings, including the console password, to the factory default values. To leave the network-related settings unchanged, make sure that Keep network-related settings is enabled.
Reset to Factory Default
Keep network-related settings(Include LAN, Cellular WAN, Ethernet WAN, and DNS settings.)
Submit

This function will reset all of the OnCell 5000's settings to the factory default values. All previous settings, including the console password will be lost. If you wish to keep the OnCell 5000 IP address, netmask, and other IP settings, make sure **Keep IP settings** is checked before loading the factory defaults.

Change Password

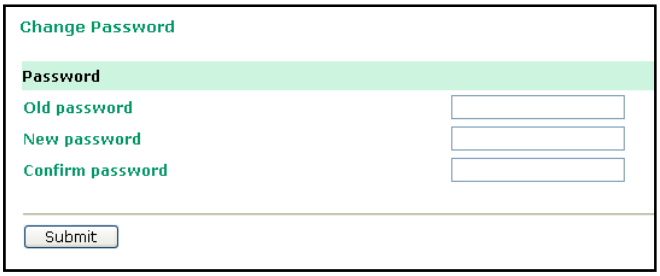

For all changes to the OnCell 5000's password protection settings, you will first need to enter the old password. Leave this blank if you are setting up password protection for the first time. To set up a new password or change the existing password, enter the password under both **New password** and **Confirm password**. To remove password protection, leave the **New password** and **Confirm password** boxes blank.

ATTENTION

If you forget the password, the ONLY way to configure the OnCell 5000 is by using the reset button on the OnCell 5000's casing to load the factory defaults.

Before you set a password for the first time, it is a good idea to export the configuration to a file when you have finished setting up your OnCell 5000. Your configuration can then be easily imported back into the OnCell 5000 if you need to reset the OnCell 5000 due to a forgotten password or for other reasons. Please refer to the section on Configuration Import/Export earlier in this chapter for more details.

Certificate

Ethernet SSL Certificate Import

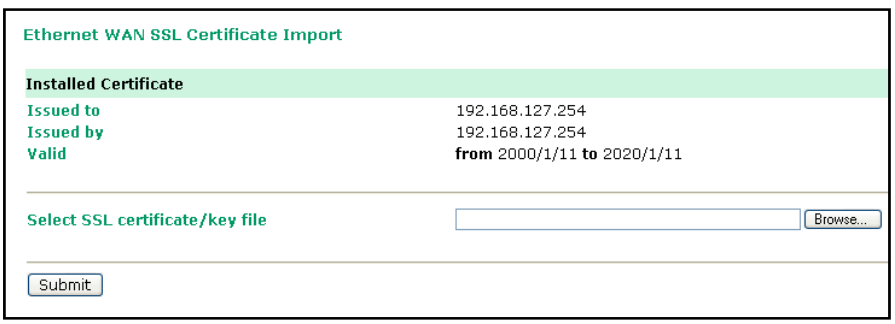

SSL certificate is used to ensure that the website you are accessing is the one you trust, and to encrypt the data transmitted between you and the website. The SSL certificate contains unique, authenticated information about the certificate owner. It is issued by a Certificate Authority (CA), such as VeriSign, that verifies the identity of the certificate owner.

The OnCell 5000 will generate a new SSL certificate whenever a new IP is used. However, the SSL certificate is issued by the OnCell itself. If you would like to import an SSL certificate issued by a primary CA, you can do it from the "Ethernet SSL Certificate Import" page.

Certificate/Key Delete

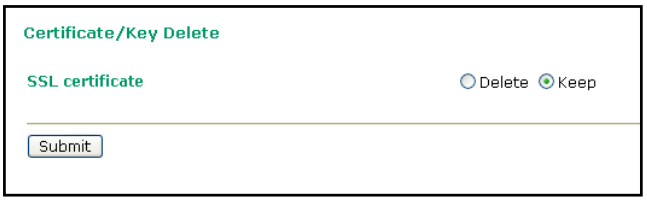

You can delete an SSL certificate on this page. To do so, select the Delete option and then click on the Submit button.

System Monitoring

Network Connections

Go to **System Monitoring** under **Network Connections** to view network connection information.

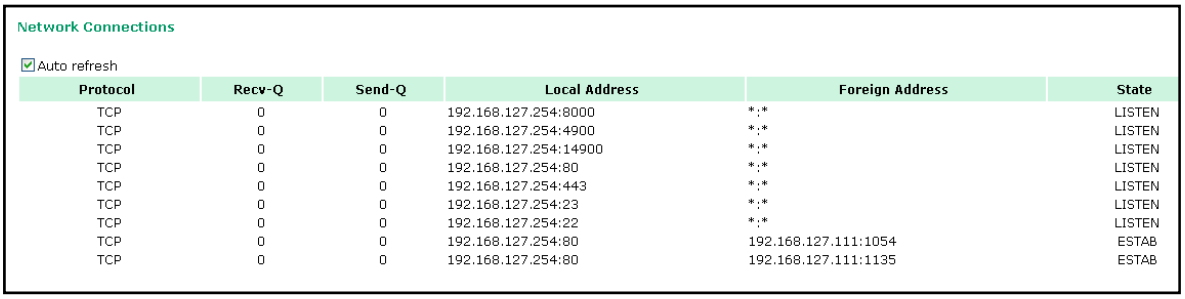

Protocol	Recv-Q	Send-Q	Local Address	Foreign Address	State
TCP	0	0	192.168.127.254:8000	*:*	LISTEN
TCP	0	0	192.168.127.254:4900	*:*	LISTEN
TCP	0	0	192.168.127.254:14900	*:*	LISTEN
TCP	0	0	192.168.127.254:80	*:*	LISTEN
TCP	0	0	192.168.127.254:443	*:*	LISTEN
TCP	0	0	192.168.127.254:23	*:*	LISTEN
TCP	0	0	192.168.127.254:22	*:*	LISTEN
TCP	0	0	192.168.127.254:80	192.168.127.111:1054	ESTAB
TCP	0	0	192.168.127.254:80	192.168.127.111:1135	ESTAB

Network Statistics

Go to System Monitoring under Network Statistics to view network statistics.

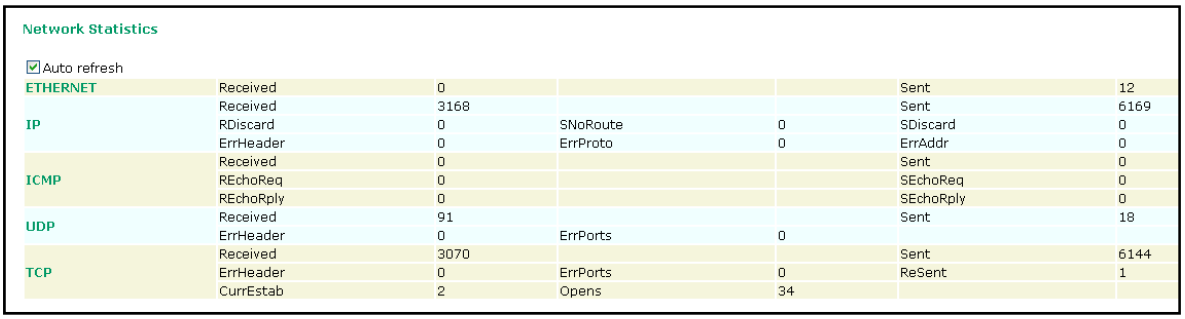

ETHERNET	Received	0			Sent	12
	Received	3168			Sent	6169
IP	RDiscard	0	SNoRoute	0	SDiscard	0
	ErrHeader	0	ErrProto	0	ErrAddr	0
	Received	0			Sent	0
ICMP	REchoReq	0			SEchoReq	0
	REchoRply	0			SEchoRply	0
UDP	Received	91			Sent	18
	ErrHeader	0	ErrPorts	0		
	Received	3070			Sent	6144
TCP	ErrHeader	0	ErrPorts	0	ReSent	1
	CurrEstab	2	Opens	34		

Routing

Go to System Monitoring under Routing to display the routing information.

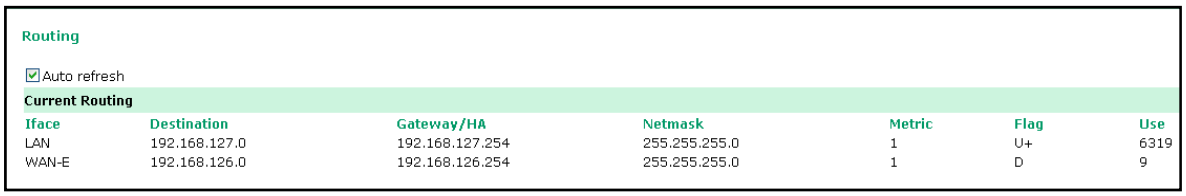
Routing
Auto refresh
Current Routing
Iface Destination Gateway/HA Netmask Metric Flag Use
LAN 192.168.127.0 192.168.127.254 255.255.255.0 1 U+ 6319
WAN-E 192.168.126.0 192.168.126.254 255.255.255.0 1 D 9

Possible flags include:

- U: route is up
- D: route is down
- G: use gateway
- +: default gateway
- T: static route
- H: target is a host

DHCP Client List

The DHCP Client List shows all the clients that require and have successfully received IP assignments. You can click the **Refresh** button to refresh the list.

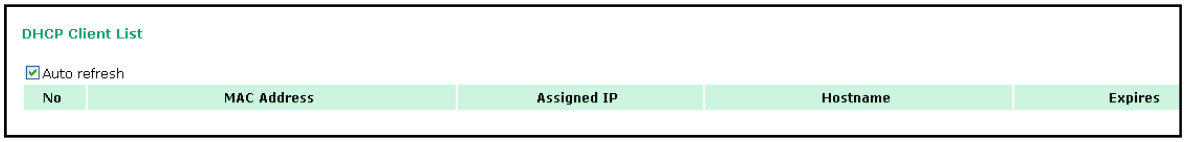

Internet Sessions List

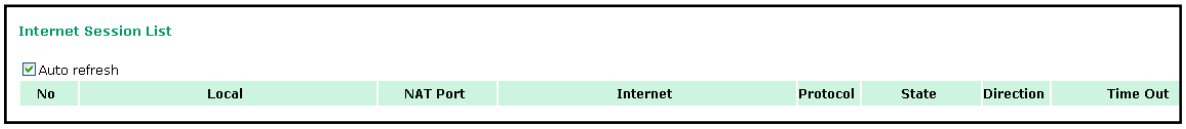

The Internet Sessions page displays full details of active Internet sessions through your router. An Internet session is a conversation between a program or application on a LAN-side computer and a program or application on a WAN-side computer/device.

System Log

This option displays the system log. You may click **Select all** to select the entire log if you wish to copy and paste the contents into a text file.

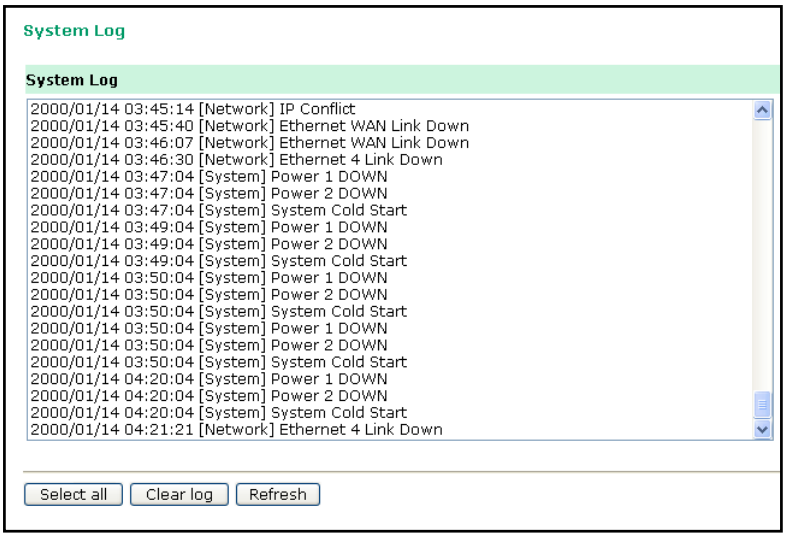
System Log
System Log
2000/01/14 03:45:14 [Network] IP Conflict
2000/01/14 03:45:40 [Network] Ethernet WAN Link Down
2000/01/14 03:46:07 [Network] Ethernet WAN Link Down
2000/01/14 03:46:30 [Network] Ethernet 4 Link Down
2000/01/14 03:47:04 [System] Power 1 DOWN
2000/01/14 03:47:04 [System] Power 2 DOWN
2000/01/14 03:47:04 [System] System Cold Start
2000/01/14 03:49:04 [System] Power 1 DOWN
2000/01/14 03:49:04 [System] Power 2 DOWN
2000/01/14 03:49:04 [System] System Cold Start
2000/01/14 03:50:04 [System] Power 1 DOWN
2000/01/14 03:50:04 [System] Power 2 DOWN
2000/01/14 03:50:04 [System] System Cold Start
2000/01/14 03:50:04 [System] Power 1 DOWN
2000/01/14 03:50:04 [System] Power 2 DOWN
2000/01/14 03:50:04 [System] System Cold Start
2000/01/14 04:20:04 [System] Power 1 DOWN
2000/01/14 04:20:04 [System] Power 2 DOWN
2000/01/14 04:20:04 [System] System Cold Start
2000/01/14 04:21:21 [Network] Ethernet 4 Link Down
Select all
Clear log
Refresh

Dout State

Dout State refers to the relay output status, which can be configured to change upon the occurrence of certain system events through **Auto Warning Settings** under **System Management**. Click **Dout State** under **System Monitoring** to display a list of events that may cause a change to the Dout state. If a configured alarm event occurs, the Dout state changes, and you can refer to this screen to determine the specific cause for the alarm. To reset the Dout state, click on Acknowledge Event.

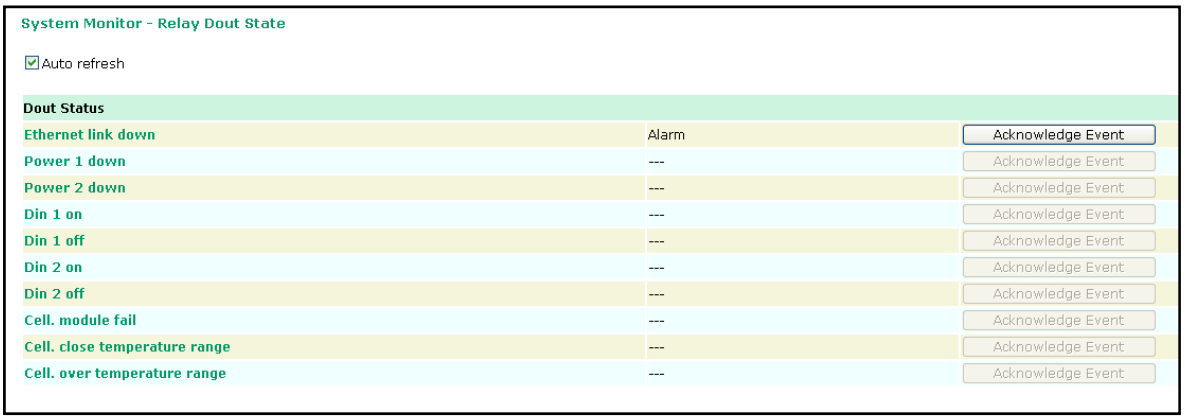

Din and Power Status

Go to **Din and Power status** under **System Monitoring** to display the power and digital input information.

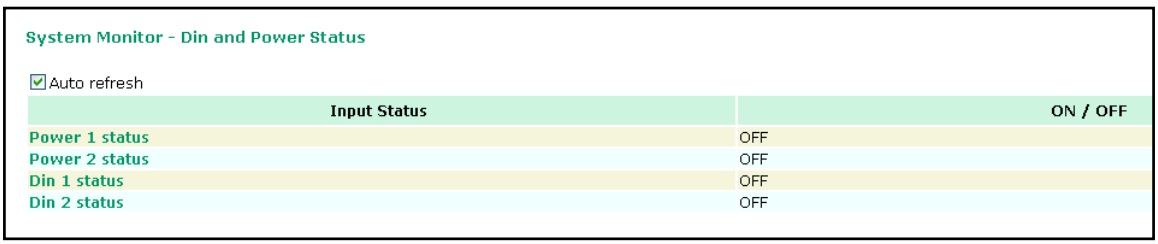

Save Configuration

Go to **Save Configuration** and then click **Save** to save your submitted configuration changes to the OnCell 5000's flash memory. The configuration changes will be effective when the OnCell 5000 is restarted. If you do not save your changes before restarting, they will be discarded.

Save Configuration
If you have submitted any configuration changes, you must save the changes and restart the server before they take effect. Click Save to save the changes in the OnCell 5104's memory.
To restart the server, go to Restart System in the navigation panel.
Save

Restart

Restart System

Go to **Restart System** under **Restart** and then click **Restart** to restart the OnCell 5000. Ensure that you save all of your configuration changes before you restart the system or else these changes will be lost.

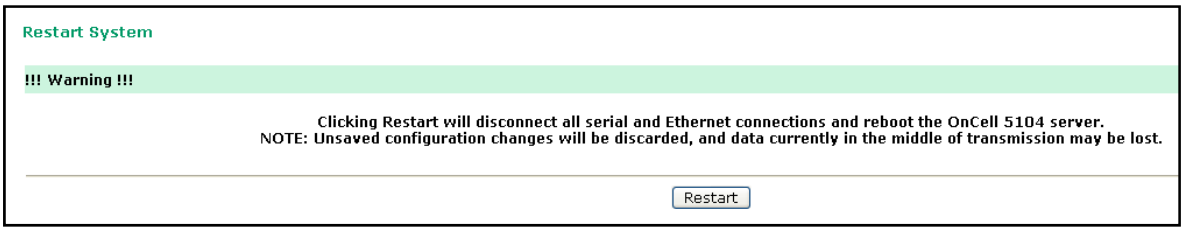
Restart System
!!! Warning !!!
Clicking Restart will disconnect all serial and Ethernet connections and reboot the OnCell 5104 server.
NOTE: Unsaved configuration changes will be discarded, and data currently in the middle of transmission may be lost.
Restart

6

Introduction and Configuring VPN

In this chapter, we explain how to configure a VPN with the OnCell 5000 web console.

The following topics are covered in this chapter:

- **What Are VPNs?**
- **OnCell VPN Specifications**
- **OnCell VPN Web Console Settings**
- **Manual Key/ESP**
  - Configuration
  - Remote Network
  - Local Network
  - Incoming Security Settings
  - Outgoing Security Settings
- **ISAKMP/PSK**
  - Configuration
  - Remote Network
  - ISAKMP (Key Management)
  - Local Identity
  - ISAKMP phase 1
  - ISAKMP phase 2
  - Advanced settings
- **VPN system log events and error codes**

What Are VPNs?

Computers that are part of a VPN use a second, “virtual” IP address to connect to the Internet. Instead of running across a single private network, some of the links between nodes that are part of a VPN use open network connections or virtual circuits on a larger network, such as the Internet. With the help of VPNs, cellular devices acting as a VPN client can initiate a connection with a VPN server. Once the connection is established, cellular devices can communicate with other network devices on the same private network.

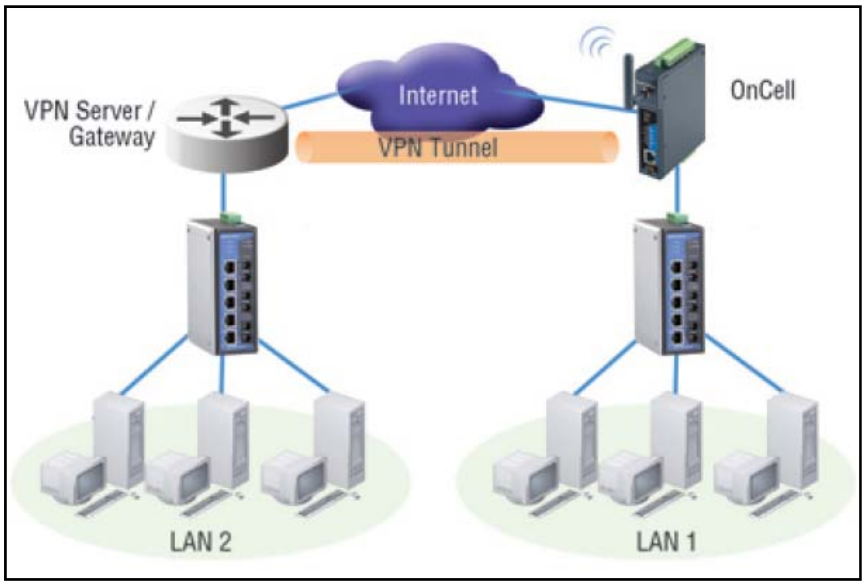

OnCell VPN Specifications

- OnCell IPSec provides security in one scenario with **Gateway-to-gateway topology**
- OnCell initiates VPN connection to VPN Server
- OnCell IPSec operates in Tunnel mode with **IPsec VPN tunnel**
  - Manual Key/ESP, IKE/PSK
  - DES/3DES/AES128/AES192/AES256 encryption
  - MD5/SHA1 authentication
- IPsec NAT traversal, Anti-Replay, and PFS (Perfect Forwarding Secrecy).

Example: Gateway to Gateway Network Topology

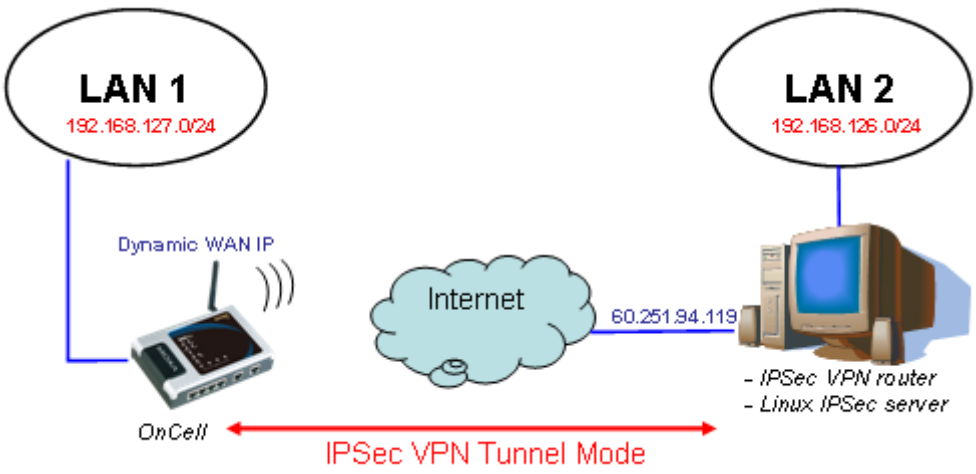

Figure: Gateway to gateway connection between OnCell and IPSec server

OnCell VPN Web Console Settings

From the left navigation panel, click **Network Advanced Network Settings → VPN to configure the OnCell VPN Settings**. The configuration items are shown below:

Manual Key / ESP

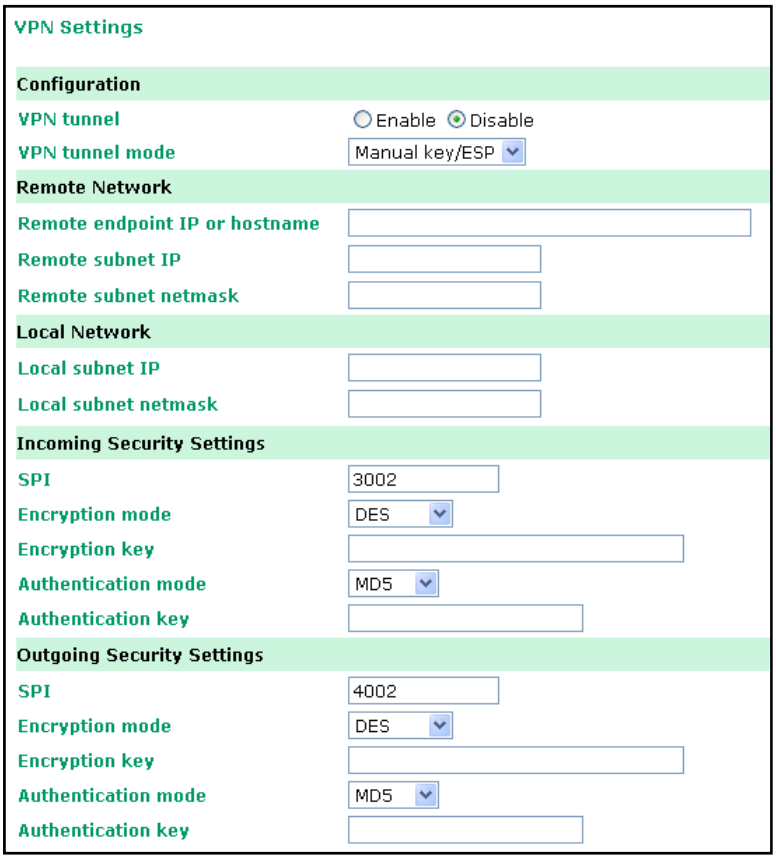

Configuration

VPN tunnel (default = Disable) : Enable or disable the VPN tunnel function.

VPN tunnel mode: The type of VPN tunnel policy to be used; either manual key IPsec or ISAKMP with Pre-shared Keys (PSK).

Remote Network

Remote endpoint IP or hostname: Enter the WAN IP or hostname of the remote VPN server endpoint.

Remote subnet IP: Enter the remote VPN server subnet IP of the remote network.

Remote subnet netmask: Enter the remote VPN server subnet netmask of the remote network.

Local Network

Local subnet IP: Enter the local OnCell LAN subnet IP.

Local subnet netmask: Enter the local OnCell LAN subnet netmask.

Incoming Security Settings

SPI: This sets the VPN manual key incoming SPI between 257 and 4294967295.

Encryption mode: Select the incoming encryption mode.

Encryption key: Enter the incoming encryption key.

Encryption mode	Length (Bytes)
DES	8
3DES	24
AES 128bit	16
AES 192bit	24
AES 256bit	32

Authentication mode: Select the incoming authentication mode.

Authentication key: Enter the incoming authentication key.

Authentication mode	Length (Bytes)
MD5	16
SHA1	20

Outgoing Security Settings

SPI: This sets the VPN manual key outgoing SPI between 257 and 4294967295.

Encryption mode: Select the outgoing encryption mode.

Encryption key: Enter the outgoing encryption key.

Encryption mode	Length (Bytes)
DES	8
3DES	24
AES 128bit	16
AES 192bit	24
AES 256bit	32

Authentication mode: Select the outgoing authentication mode.

Authentication key: Enter the outgoing authentication key.

Authentication mode	Length (Bytes)
MD5	16
SHA1	20

ISAKMP / PSK

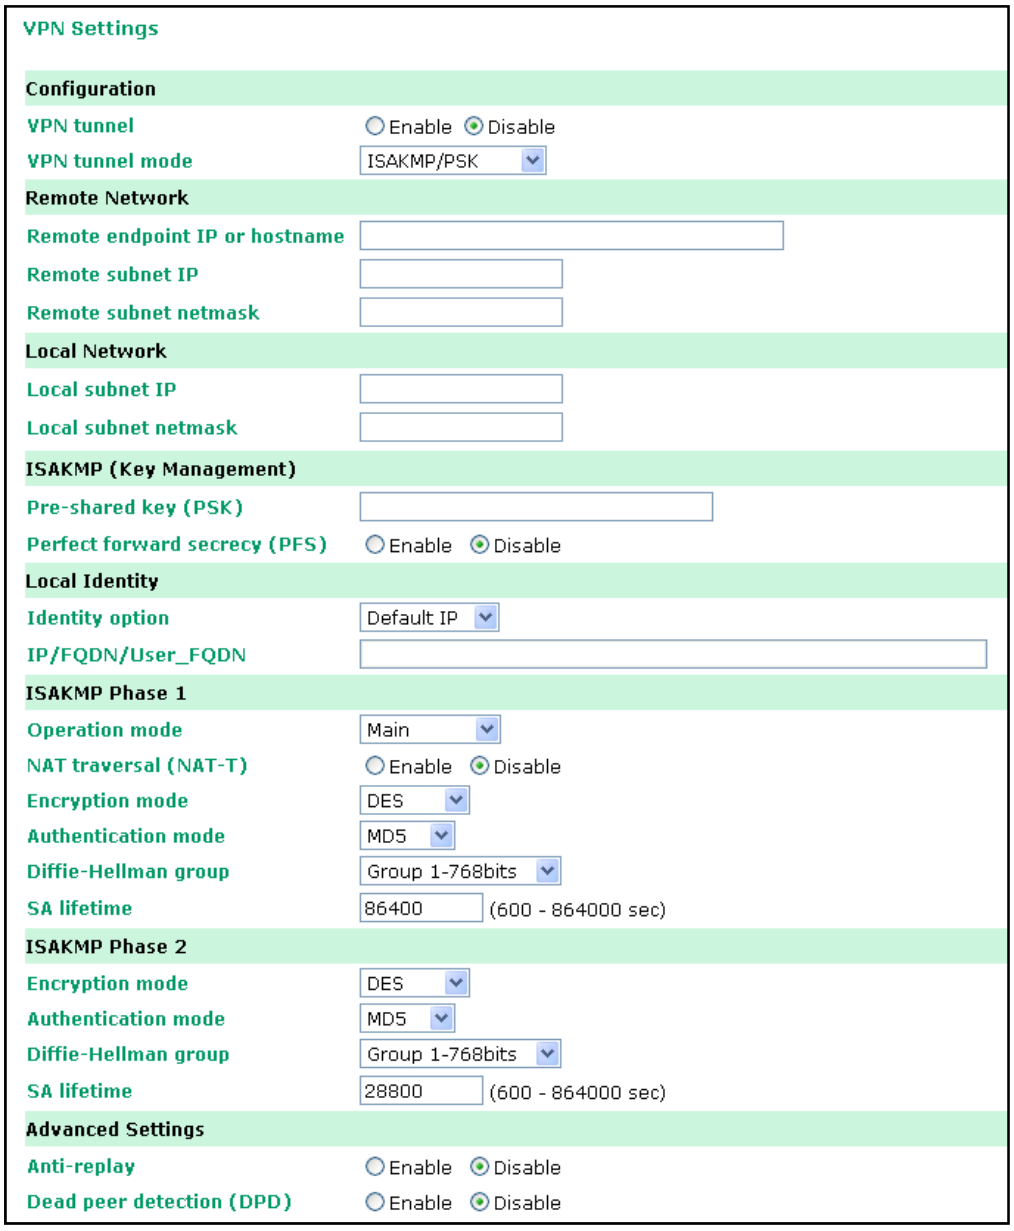

Configuration

VPN tunnel (default = Disable) : Enable or disable the VPN tunnel function.

VPN tunnel mode: The type of VPN tunnel policy to be used; either manual key IPsec or ISAKMP with Pre-shared Keys (PSK).

Remote Network

Remote endpoint IP or hostname: Enter the WAN IP or hostname of the remote VPN server endpoint.

Remote subnet IP: Enter the remote VPN server subnet IP of the remote network.

Remote subnet netmask: Enter the remote VPN server subnet netmask of the remote network.

ISAKMP (Key Management)

Pre-shared key (PSK): This sets the VPN ISAKMP Pre-Shared key settings.

Perfect forward secrecy (PFS) (default = Disable): Enable or disable the Perfect Forward Secrecy. PFS is an additional security protocol.

Local Identity

Identity option: Select additional ID authentication requirements for the VPN using a specific IP Address, FQDN, or User FQDN settings.

IP/FQDN/User_FQDN: Enter an ID (IP/FQDN/User_FQDN) to identify and authenticate the local VPN endpoint.

ISAKMP phase 1

Operation mode: Select main mode or aggressive mode to configure the standard negotiation parameters for IKE Phase 1 of the VPN Tunnel.

NAT-T (default = Disable): Enabling this option will allow IPSec traffic from this endpoint to traverse through the translation process during NAT. The remote VPN endpoint must also support this feature and it must be enabled to function properly over the VPN.

Encryption mode: Select the VPN ISAKMP phase 1 encryption mode.

Authentication mode: Select the VPN ISAKMP phase 1 authentication mode.

Diffie-Hellman group: Select the VPN ISAKMP phase 1 DH group. As the DH Group number increases, the higher the level of encryption implemented for PFS

SA life time (default = 86400): Enter the number of seconds for the VPN ISAKMP phase 1 Lifetime. This is the period of time to pass before establishing a new IPSec security association (SA) with the remote endpoint.

ISAKMP phase 2

Encryption mode: Select the VPN ISAKMP phase 2 encryption mode.

Authentication mode: Select the VPN ISAKMP phase 2 authentication mode.

Diffie-Hellman group: Select the VPN ISAKMP phase 2 DH group. As the DH Group number increases, the higher the level of encryption implemented for PFS

SA life time (default = 28800): Enter the number of seconds for the VPN ISAKMP phase 2 Lifetime. This is the period of time to pass before establishing a new IPSec security association (SA) with the remote endpoint.

Advanced settings

Anti-replay (default = Disable): Anti-replay is the method of not allowing an intercepted packet message to be sent to the recipient multiple times without the original sender knowing.

Dead Peer Detection (DPD) (default = Disable): Enable or disable the Dead Peer Detection. DPD is a method of detecting a dead Internet Key Exchange (IKE) peer. It sends a DPD packet to the peer every 60 seconds under no traffic and attempt to connect normally. If the DPD packet fails 5 times the VPN will continuously re-establish a connection.

VPN system log events and error codes

VPN system log	Description
VPN init.	VPN tunnel initial
VPN init. by packet	VPN tunnel initial by packet driven
VPN stop	VPN tunnel stop
VPN phase2 SA time out	VPN tunnel phase 2 security association time out
VPN time out	VPN tunnel connect time out
VPN has mismatched proposal	VPN tunnel proposal not match
VPN disconnected by change WAN IP	VPN tunnel disconnected by change WAN IP
VPN disconnected by DPD	VPN disconnected by Dead peer detection
VPN start phase1 main mode connect	VPN tunnel start phase 1 main mode connect
VPN start phase1 aggr. mode connect	VPN tunnel start phase1 aggressive mode connect
VPN start encryption	VPN tunnel start encryption
VPN phase1 pass	VPN tunnel phase 1 pass
VPN phase2 pass	VPN tunnel phase 2 pass
VPN Error Code 0001 ~ 0030	VPN tunnel others error code Note: For details refer to "Notify Messages - Error Types"on page 40 in http://docbox.etsi.org/Reference/IETF/RFC/RFC2408.pdf
VPN phase2 renew key	VPN tunnel phase 2 renew key
VPN phase2 renew key success	VPN tunnel phase 2 renew key success
VPN phase1 SA time out	VPN tunnel phase 1 security association time out
VPN phase1 key(ISAKMP) deleted by remote	VPN tunnel phase 1 key(ISAKMP) deleted by remote
VPN phase2 key(ESP) deleted by remote	VPN tunnel phase 2 key(ESP) deleted by remote

7

Configuring OnCell Central Management Software

In this chapter, we introduce OnCell Central Management Software, and explain how to configure OnCell Central Management Software with the OnCell 5000 web console, install and set the OnCell Central Driver Manager, and cover all of the equipment specifications.

The following topics are covered in this chapter:

- **Step 1: Server Settings**
  - System Requirements
  - Installing OnCell Central Manager
  - Using OnCell Central Manager
- **Step 2: OnCell Device Web Console Settings**
  - OnCell Central Settings
  - OnCell Central Server
  - Service Forwarding
- **Step 3: Host Settings and Management**
  - OnCell Central Web Console
- **Server**
  - Overview
  - Control Ports/User Ports Information.
  - Account Settings
- **Device**
  - All Devices
  - All User Ports
  - Service Forwarding
  - Firmware Upgrade
  - Device's Settings and Maintenance
  - Overview
  - User Ports
  - Service Forwarding
  - Maintenance
- **Logout**

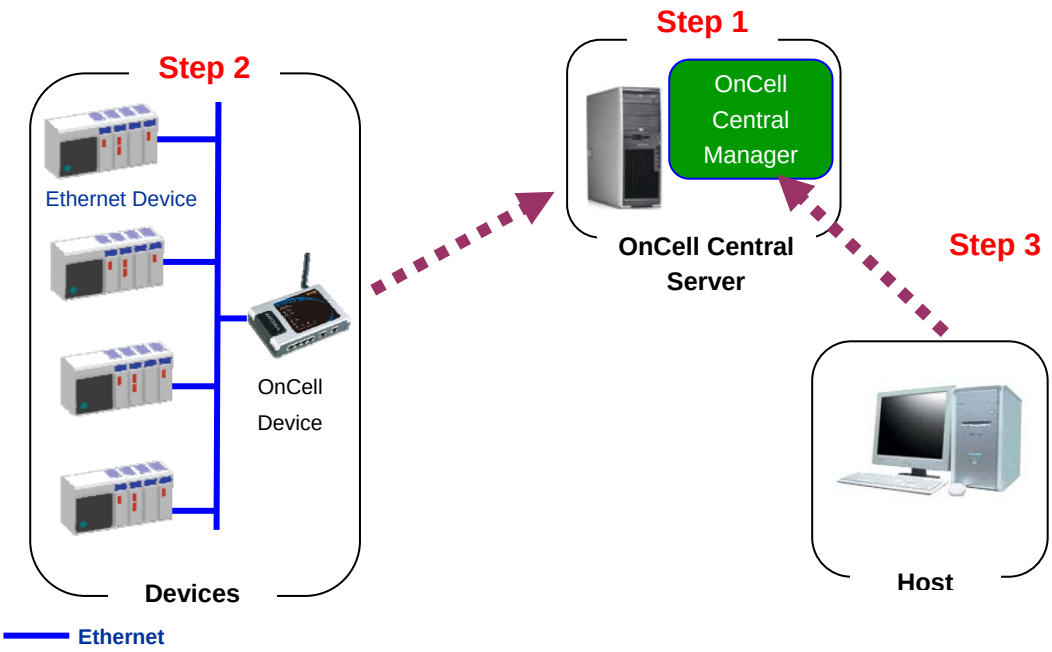

Step 1: Server Settings

System Requirements

Hardware Requirements

Your computer's hardware must meets the following minimum requirements:

- Pentium III or above
- 500 MHz CPU (1 GHz recommended)
- 256 Mb RAM (1 GB recommended)
- 300 MB disk space

Software Requirements

OnCell Central Manager runs on the following operating systems:

- Microsoft Windows 2000 Server
- Microsoft Windows Server 2003
- Microsoft Windows Server 2008
- Internet Explorer 6.0 above is required.

Installation Requirements

Installing OnCell Central Manager software involves two main elements:

- Adobe Flash
- OnCell Central Manager software

Installing OnCell Central Manager

To install the OnCell Central Manager software, follow these steps. This procedure requires that you have administrative privileges. Insert the OnCell Installation CD into the OnCell Central Server.

1. Click the **INSTALL OnCell Central Manager** button in the OnCell Installation CD auto-run window to install the OnCell Central Manager. Once the installation program starts running, click **Yes** to proceed.

2. Click **Next** when the Welcome screen opens to proceed with the installation.

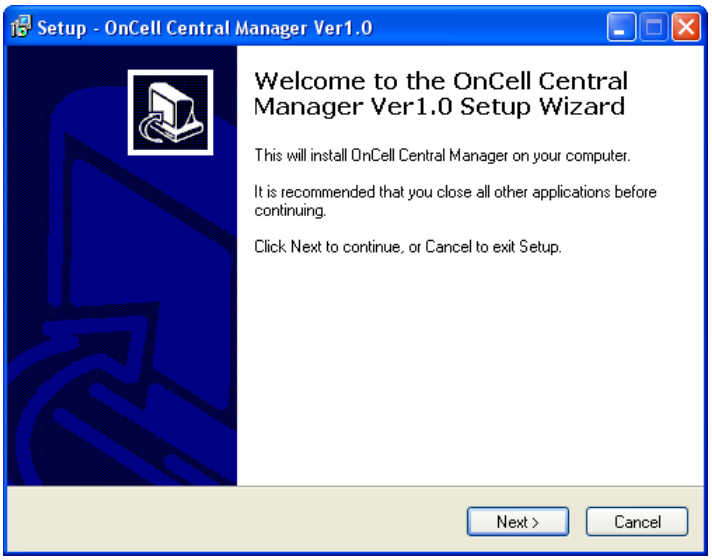
Setup - OnCell Central Manager Ver1.0
Welcome to the OnCell Central Manager Ver1.0 Setup Wizard
This will install OnCell Central Manager on your computer.
It is recommended that you close all other applications before continuing.
Click Next to continue, or Cancel to exit Setup.
Next >
Cancel

3. Click **Next** to install program files to the default directory, or click **Browse** to select an alternate location.

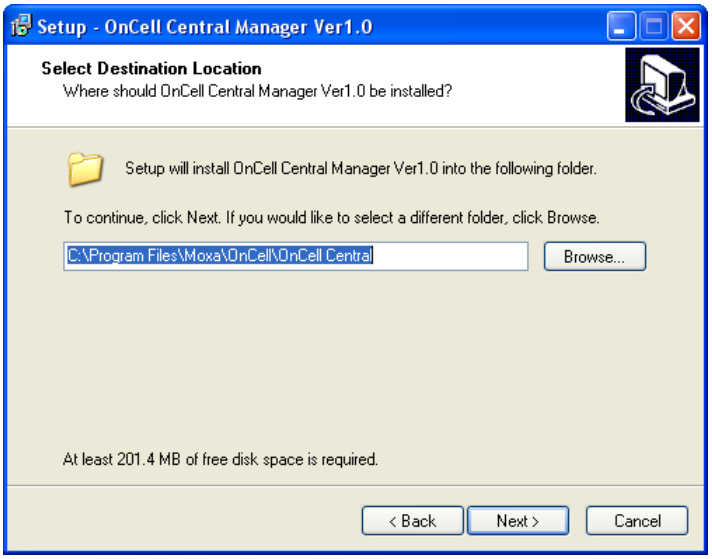
Setup - OnCell Central Manager Ver1.0
Select Destination Location
Where should OnCell Central Manager Ver1.0 be installed?
Setup will install OnCell Central Manager Ver1.0 into the following folder.
To continue, click Next. If you would like to select a different folder, click Browse.
C:\Program Files\Moxa\OnCell\OnCell Central
Browse...
At least 201.4 MB of free disk space is required.
< Back
Next >
Cancel

4. Click **Next** to install the program's shortcuts in the appropriate Start Menu folder.

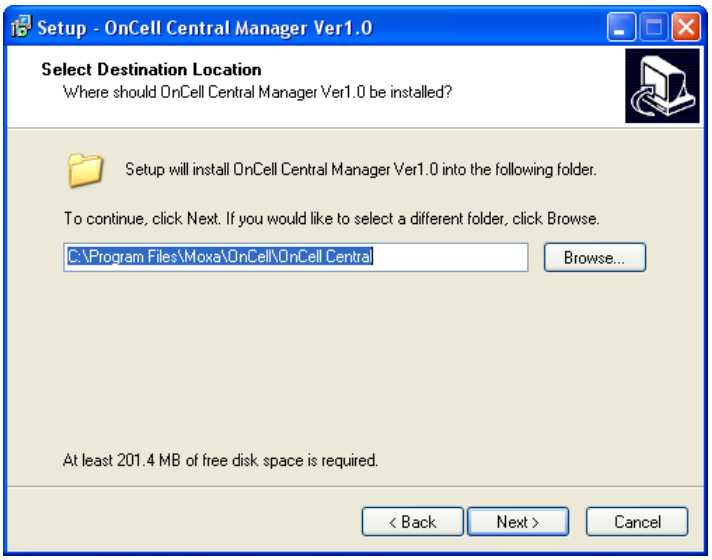
Setup - OnCell Central Manager Ver1.0
Select Destination Location
Where should OnCell Central Manager Ver1.0 be installed?
Setup will install OnCell Central Manager Ver1.0 into the following folder.
To continue, click Next. If you would like to select a different folder, click Browse.
C:\Program Files\Moxa\OnCell\OnCell Central
Browse...
At least 201.4 MB of free disk space is required.
< Back
Next >
Cancel

5. Click **Next** to proceed with the installation. You will be prompted to select additional tasks.

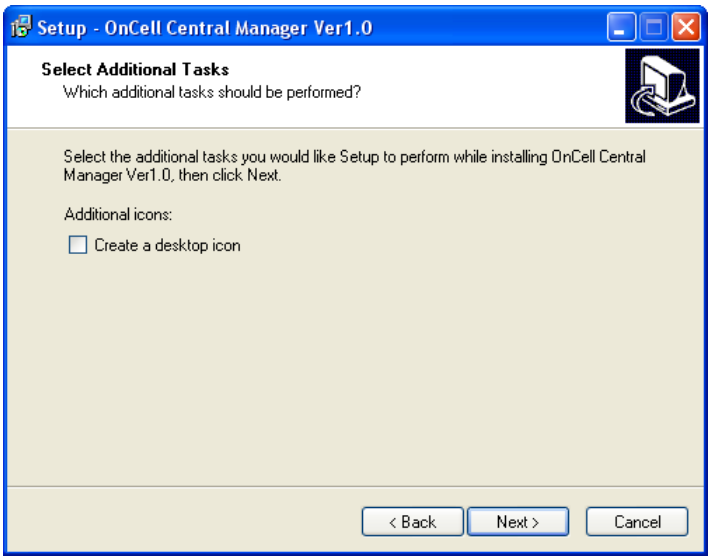
Setup - OnCell Central Manager Ver1.0
Select Additional Tasks
Which additional tasks should be performed?
Select the additional tasks you would like Setup to perform while installing OnCell Central Manager Ver1.0, then click Next.
Additional icons:
Create a desktop icon
< Back
Next >
Cancel

6. Click **Next** to proceed with installation. Setup will display a summary of the installation options.

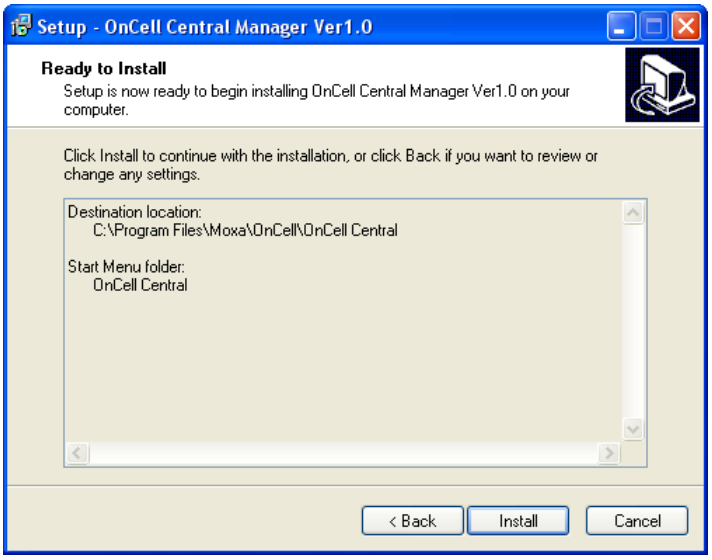
Setup - OnCell Central Manager Ver1.0
Ready to Install
Setup is now ready to begin installing OnCell Central Manager Ver1.0 on your computer.
Click Install to continue with the installation, or click Back if you want to review or change any settings.
Destination location:
C:\Program Files\Moxa\OnCell\OnCell Central
Start Menu folder:
OnCell Central
< Back
Install
Cancel

7. Click **Install** to begin installation. The setup window will report the installation progress. To change the installation settings, click **Back** and navigate to the previous screen.

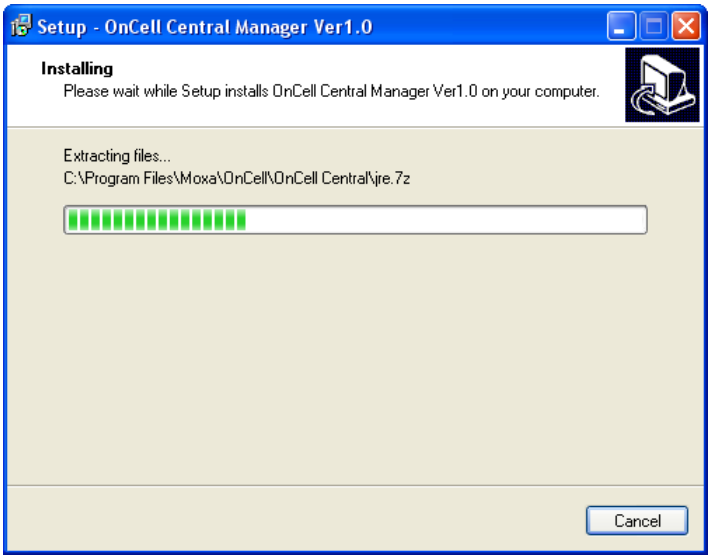
Setup - OnCell Central Manager Ver1.0
Installing
Please wait while Setup installs OnCell Central Manager Ver1.0 on your computer.
Extracting files...
C:\Program Files\Moxa\OnCell\OnCell Central\jre.7z
Cancel

8. Click **Finish** to complete the installation of the OnCell Central Manager.

Setup - OnCell Central Manager Ver1.0
Completing the OnCell Central Manager Ver1.0 Setup Wizard
Setup has finished installing OnCell Central Manager Ver1.0 on your computer. The application may be launched by selecting the installed icons.
Click Finish to exit Setup.
Finish

Using OnCell Central Manager

After you install OnCell Central Manager, you can set up the OnCell 5000's OnCell Central Settings for your PC host. Make sure the settings on your OnCell 5000 match the settings for OnCell Central Manager.

1. Go to **Start → OnCell Central → OnCell Central** to start the OnCell Central mapping software.

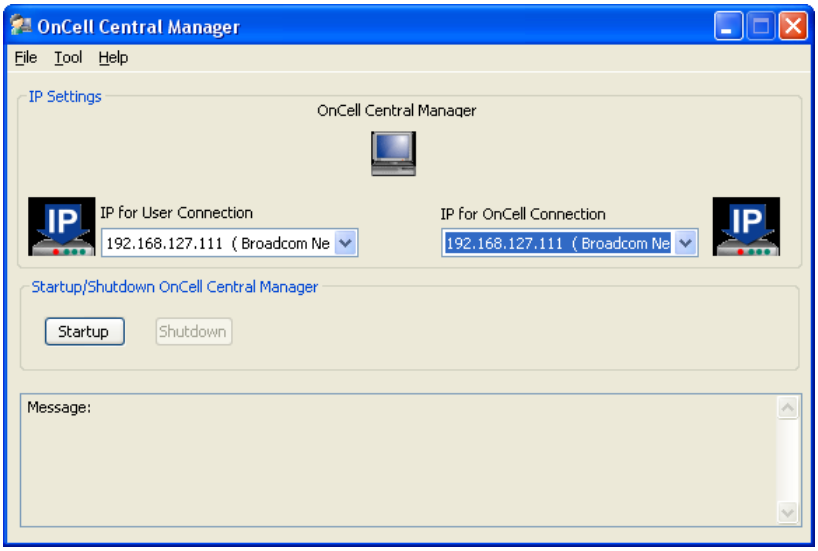

You may need to install Adobe Flash before using this OnCell Central Server. The system will give you the link for installation automatically. Alternatively, you may find the Adobe Flash in the CD as well.

2. Click on **Tool → Control Ports Settings** to modify the port number.

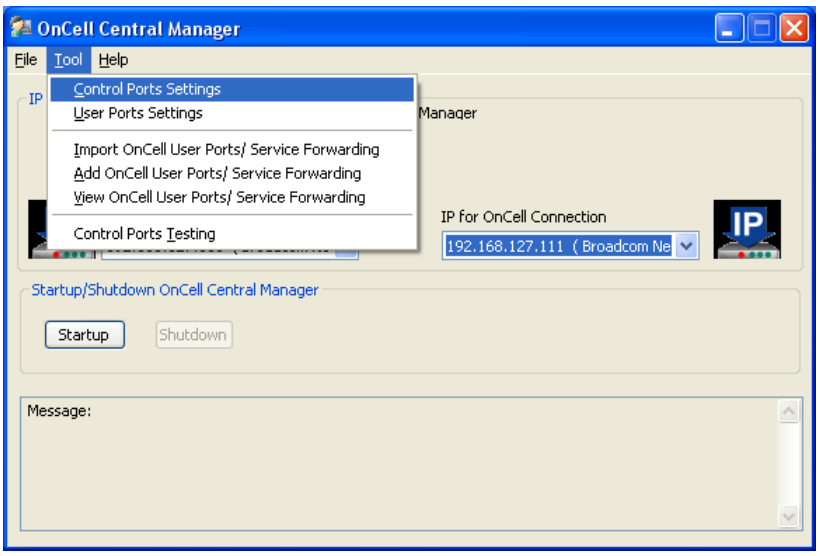

To modify the new configuration of control ports, you can make all configuration changes here. The Control Ports Setting's information must match the web console's OnCell Central Server Settings. Please refer to Step 2, OnCell Device Web Console Settings, for control port information. Click **Save** if any modifications have been made.

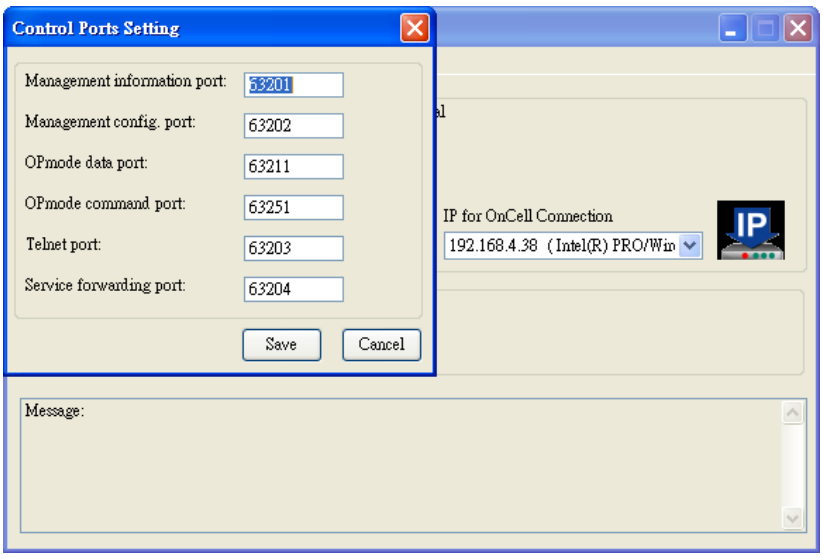

3. Click on **Tool → User Ports Settings** to modify the port number. Click Save if any modifications have been made.

   User Ports are used to connect the host and OnCell Central Server. The User Ports are assigned by the OnCell Central Server to each OnCell device sequentially within the specified port range.

   Data port: Ports used to communicate with serial devices connected to the OnCell.

   Command port: The TCP port for listening to SSDK commands from the host.

   Service forwarding: Ports used to communicate with Ethernet devices connected to the OnCell.

   Telnet port: The telnet port is the TCP listening port that allows the host to configure the OnCell via Telnet.

   NOTE: Enabling Remove registered ports will remove the already assigned port numbers within the specified port range from the system.

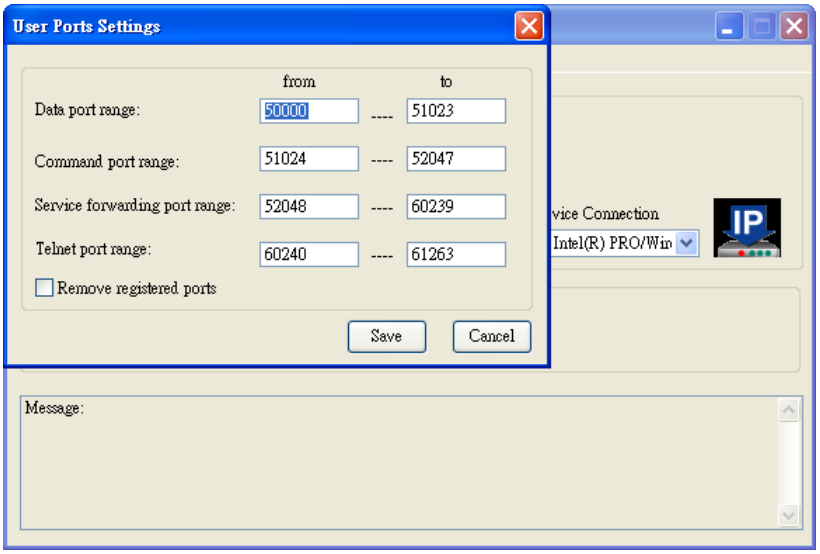

4. If you need to import/add a long pre-defined device list to the OnCell Central Server, follow the next step, otherwise skip directly to **Step 9**.
5. To import the configuration from a text file, click on **Tool → Import OnCell User Ports/Service Forwarding**.

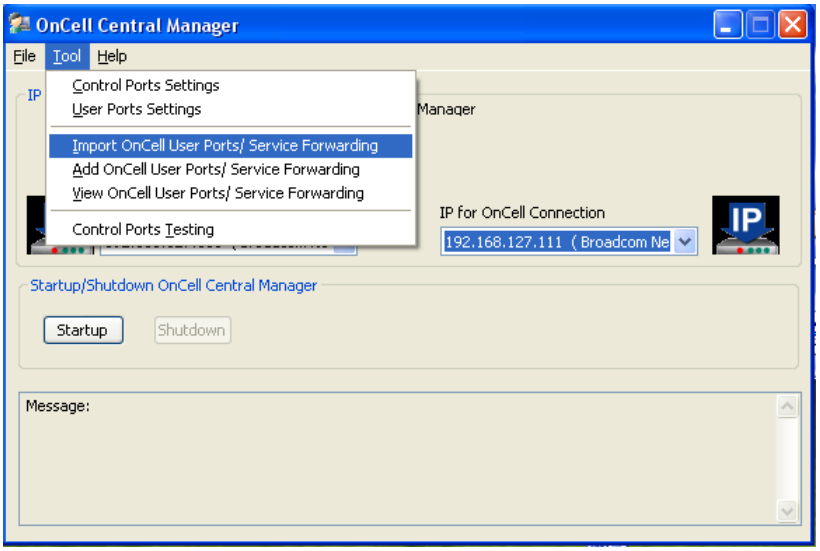

Browse to locate the configuration file (file format can be .txt for the following import format) and then click **Import** (same step as Import Service Forwarding).

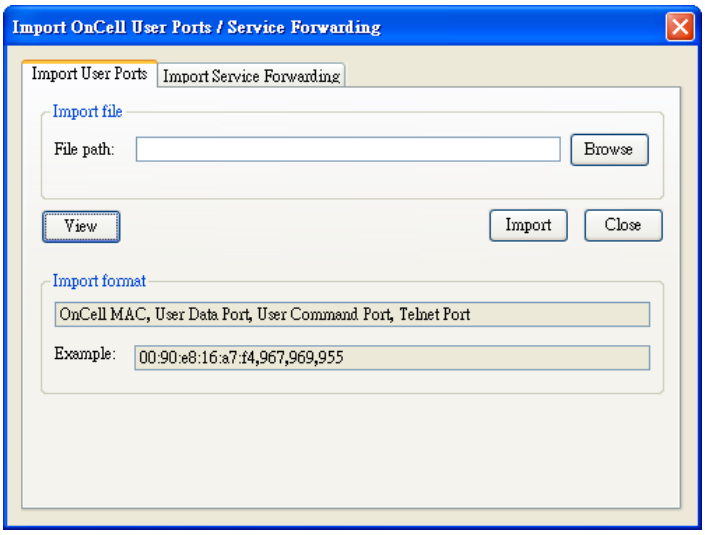

6. Alternatively, for OnCell User Ports and Service Forwarding, you can manually enter the information. Click on **Tool → Add OnCell User Ports/Service Forwarding**.

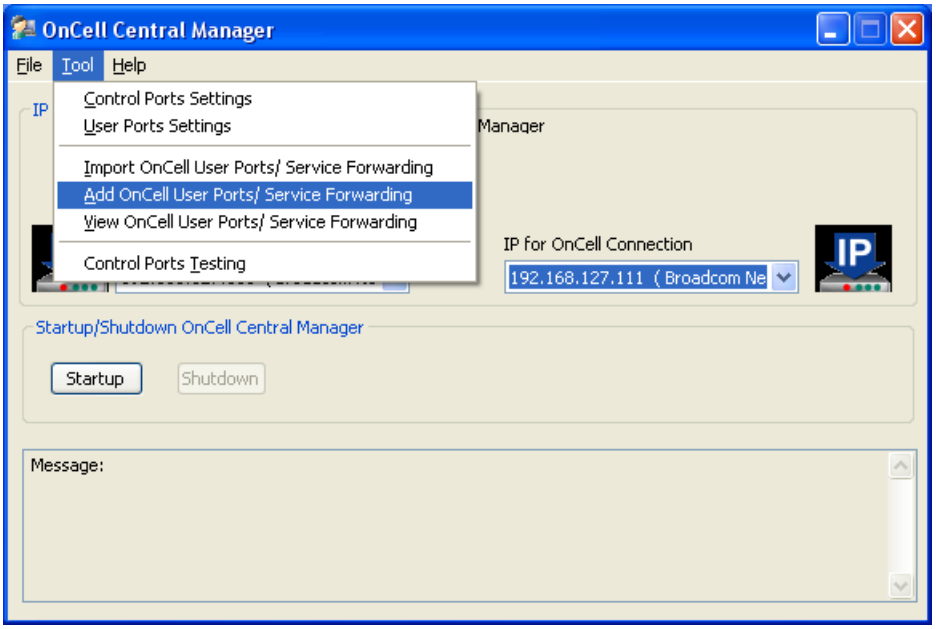

(Same step as Import Service Forwarding.)

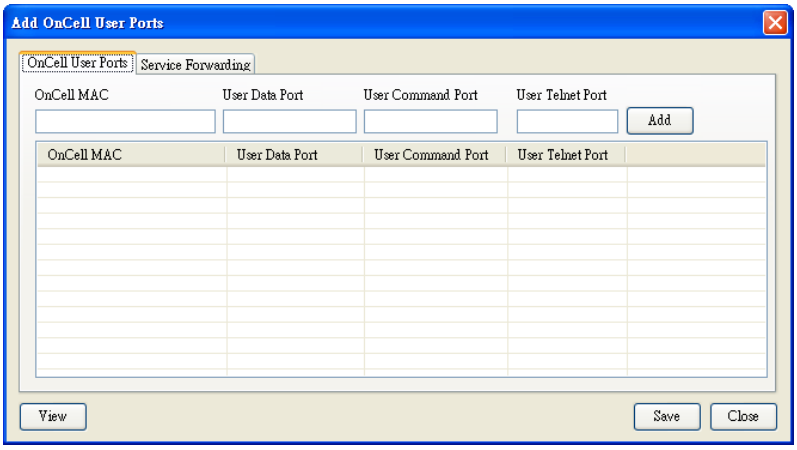

7. In order to view the information you have been imported or added, click on **View** (same step as Import Service Forwarding).

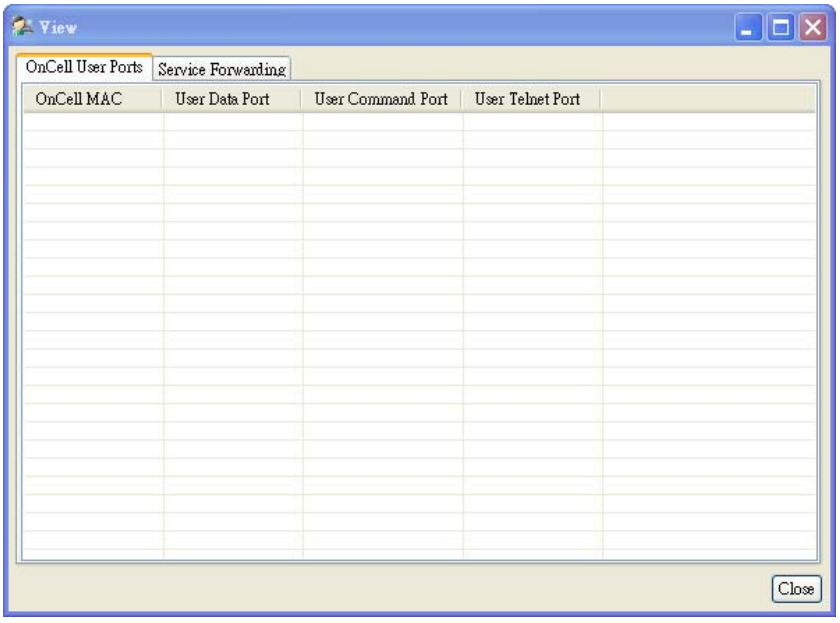

8. To save **All** the configuration settings to an xml file format, select **Export DataBase** from the **OnCell Central** menu. You will then be able to import this configuration file to another host and use the same OnCell Central settings on the other host.

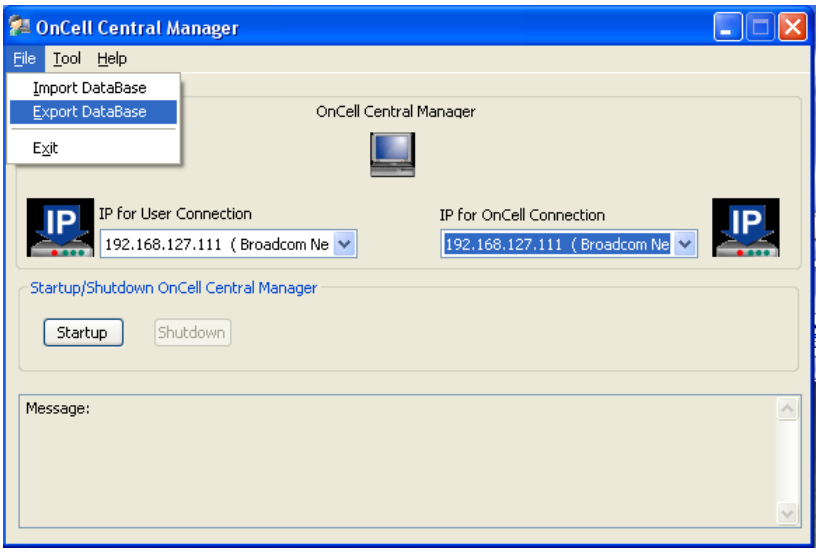

9. When all the configurations have been completed, return to the OnCell central main page. If your OnCell Central Server has two LAN cards, you may need to **select** the IP that needs to pass through the OnCell Connection and User Connection, and then click **Startup**.
   For security reasons, we use 2 LAN cards for the server, one for the private IP domain in User Connection, and another for the public IP domain in OnCell Connection (OnCell Central must be accessible from the public IP domain).

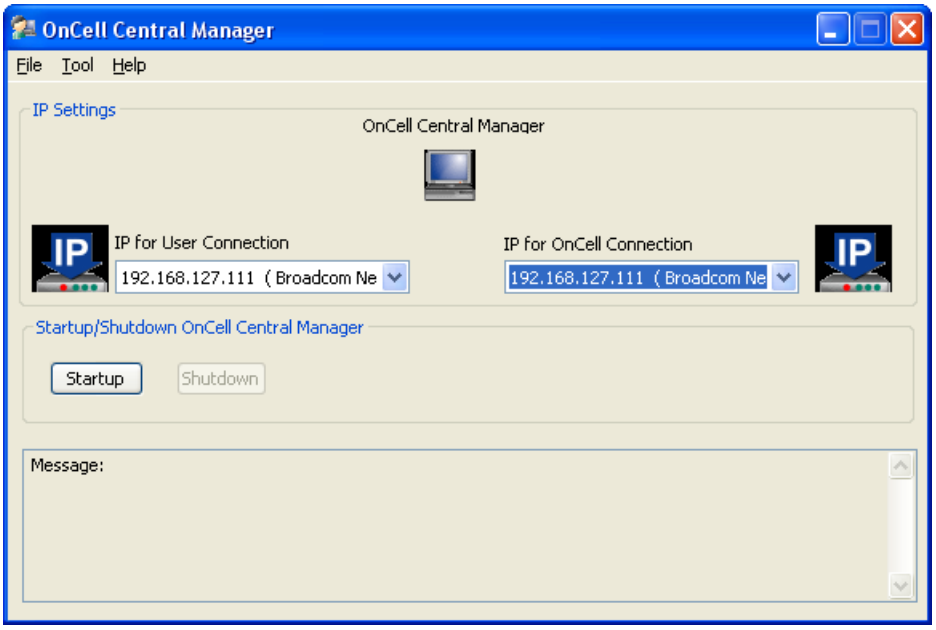

Step 2: OnCell Device Web Console Settings

OnCell Central Settings

From the left navigation panel, click **Network Settings → OnCell Central Settings → OnCell Central Server** to configure the OnCell Central Settings. The configuration items are shown below:

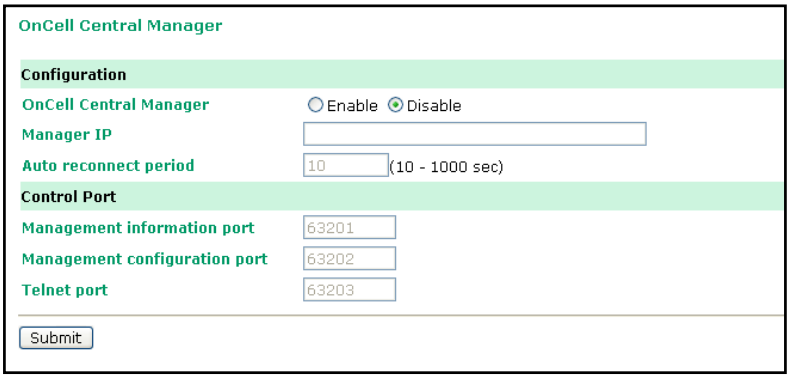

OnCell Central Server

Configuration

Server (default=Disable): If you select Enable, the OnCell will be ready to connect to the OnCell Central Server

Server IP: Enter the IP address that will be assigned to your OnCell Central Server. The IP address must be in the **Public IP** domain.

Auto reconnect period (default=10 s): This field specifies the idle time setting for auto-reconnect.

Control Port

Management information port (default=63201): This port is used to transfer status information of the OnCell to the OnCell Central Server. The port number must match the OnCell Central Manager's port number configured in the OnCell Central Server. In order to prevent port conflicts with other applications, you can set the management information port to another port if needed.

Management configuration port (default=63202): This port is used to transfer configurations from the OnCell to the OnCell Central Server. The port number must match the OnCell Central Manager's port number configured in the OnCell Central Server. In order to prevent a port conflict with other applications, you can set the management information port to another port if needed.

Telnet port (default=63203): The Telnet port is the TCP port that is listening for Telnet connection from the host side. In order to prevent a TCP port conflict with other applications, you can set the Telnet port to another port if needed.

Service Forwarding

From the left navigation panel, click **Network Settings → OnCell Central Settings → Service Forwarding** to configure the OnCell Central Settings. The configuration items are shown below:

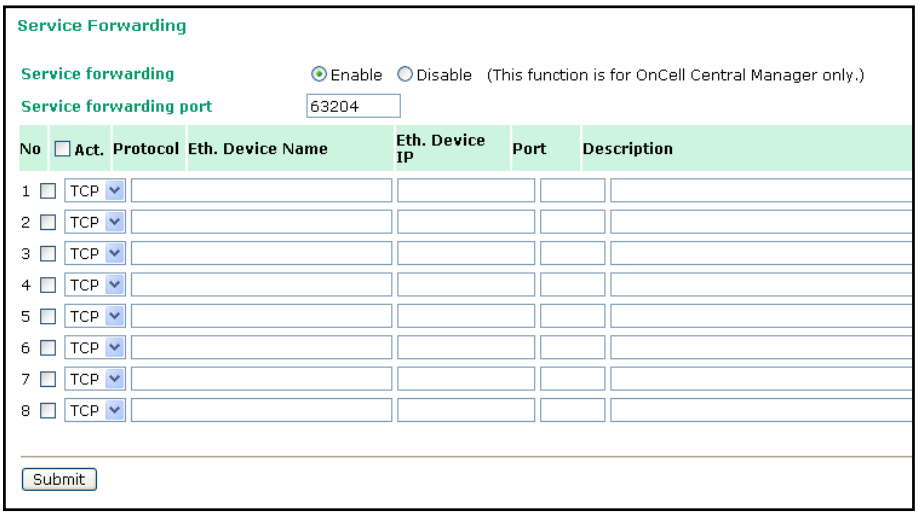

Service forwarding (default=Disable): If enabled, this option will establish the Ethernet device connection of the OnCell device to OnCell Central Server. Up to 8 Ethernet devices can be stored in the Service Forwarding Table.

Service forwarding port: Ports used to establish the Ethernet port connection of the OnCell device to OnCell Central Server.

Step 3: Host Settings and Management

Before you connect to OnCell Central's Web, you must install Adobe Flash, which you can download from Adobe Flash Web Site: http://get.adobe.com/flashplayer/

If you are using Microsoft Windows 2000 Server, Microsoft Windows 2008 Server, or Microsoft Windows Server 2003 platform, you may need to enable your ActiveX control on your platform. For other platform versions, refer directly to the Host Settings.

1. Start Internet Explorer and click on **Tool → Internet Options**.

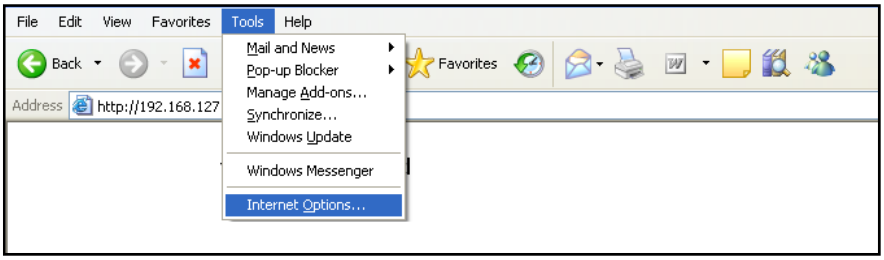

2. Select **Security** Settings, select **Internet**, and then click **Custom Level**.

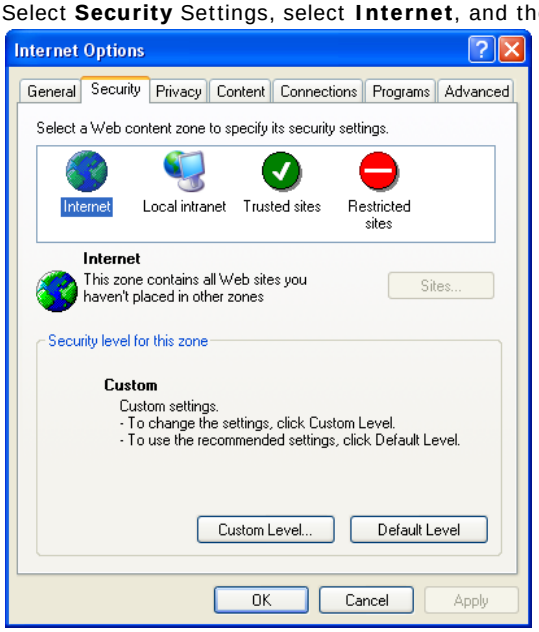

3. Enable **Download signed ActiveX controls**.

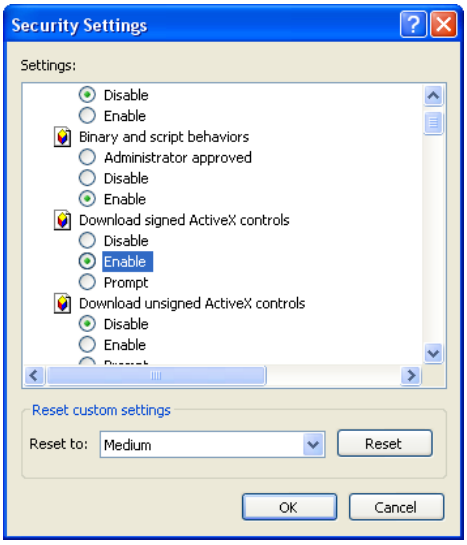

4. Enable **Run ActiveX controls and plug-ins**.

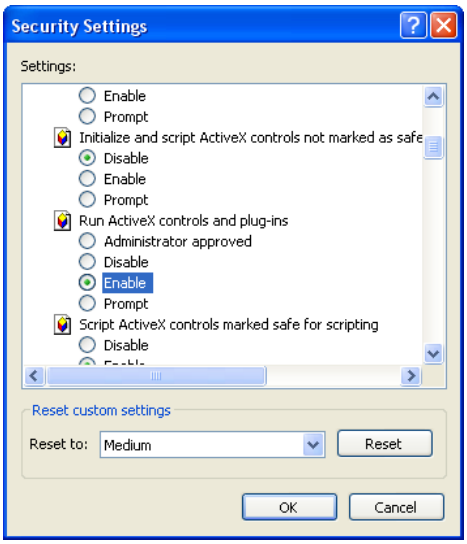

5. Enable **Script ActiveX controls marked safe for scripting** and then click **OK**.

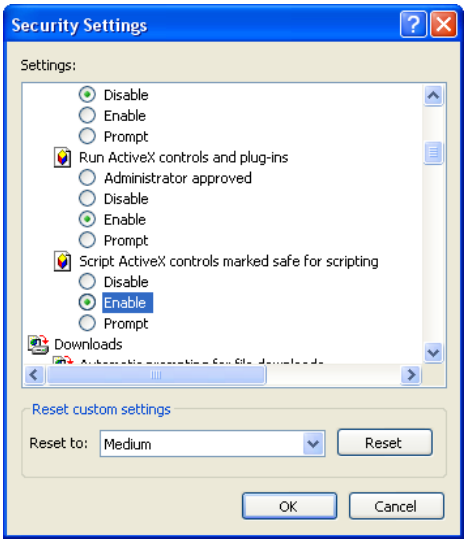

6. Select **Trusted sites** under Security and then click **on Sites...**

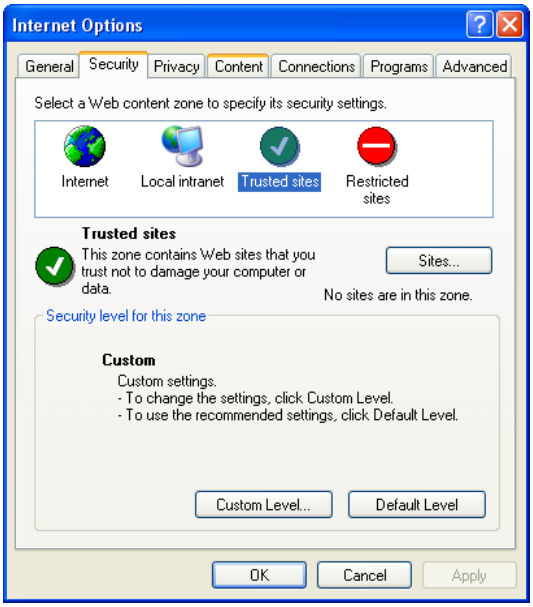

7. Enter your IP address for your OnCell Central's web page, then click **Add**.

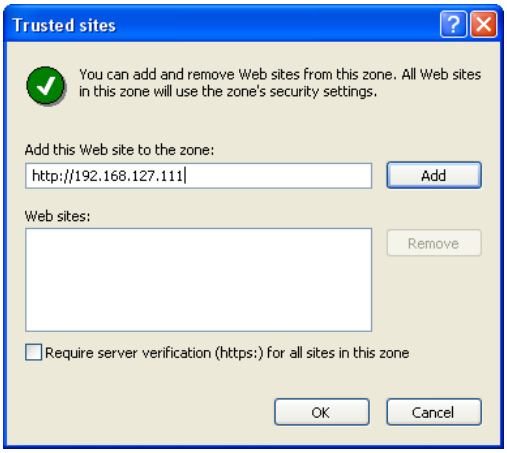
Trusted sites
You can add and remove Web sites from this zone. All Web sites in this zone will use the zone's security settings.
Add this Web site to the zone:
http://192.168.127.111
Add
Web sites:
Remove
Require server verification (https:) for all sites in this zone
OK
Cancel

8. Click on **Custom Level...**

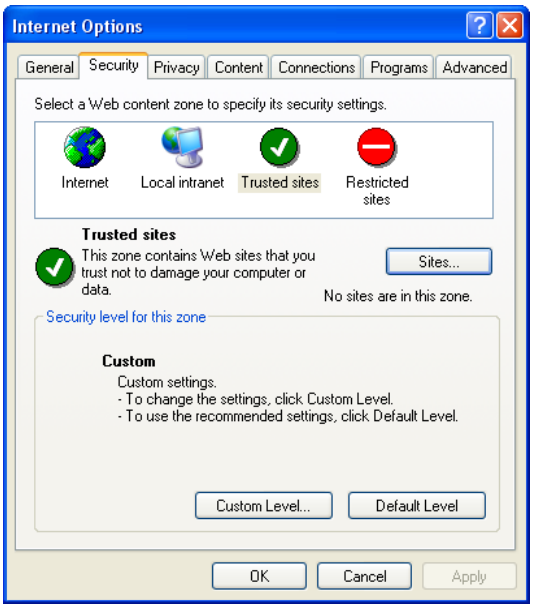

9. Enable **Download signed ActiveX controls**

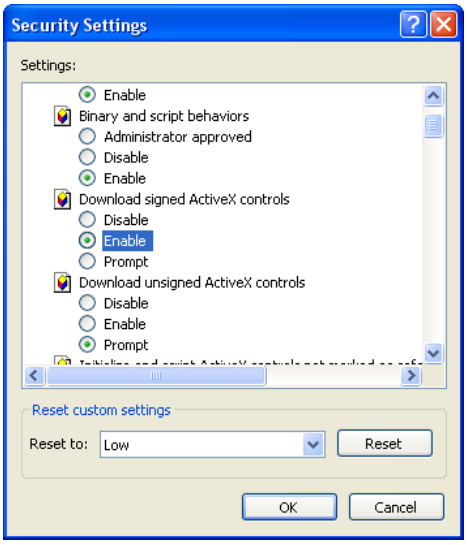

10. Enable **Run ActiveX controls and plug-ins**

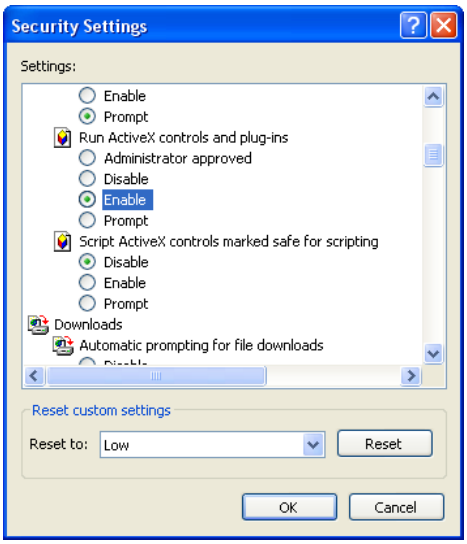

11. Enable **Script ActiveX controls marked safe for scripting** and then click **OK**

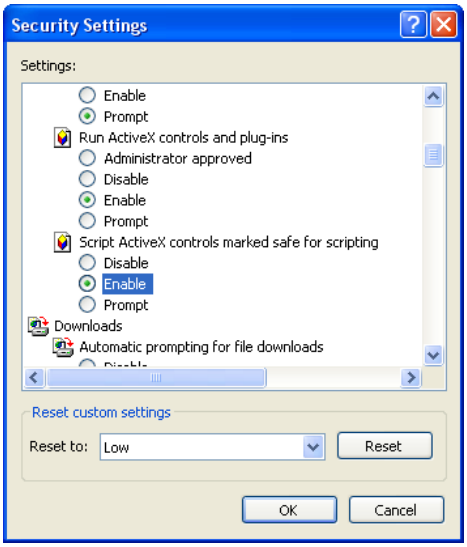

OnCell Central Web Console

1. Start the web browser.
2. In the **Address** input box, enter the OnCell Central's web IP address follow with the 8080 port (e.g., 192.168.127.111:8080). You should see the OnCell Central Manager Welcome page.
3. Enter the default username and password and then click **Login**.
   Username: admin
   Password: admin
4. The **OnCell Central** page will open:

From this page, you can change the view to one of the following options:

- **Server**
- **Device**
- **Logout**

Server

This section describes how to change the connection ports number for device and host in order to establish a connection with OnCell Central Server. If you would like to change your account settings, you can use the instructions in this section to do so.

Overview

The page shows which OnCell Central Manager version number you are using.

Control Ports/User Ports Information.

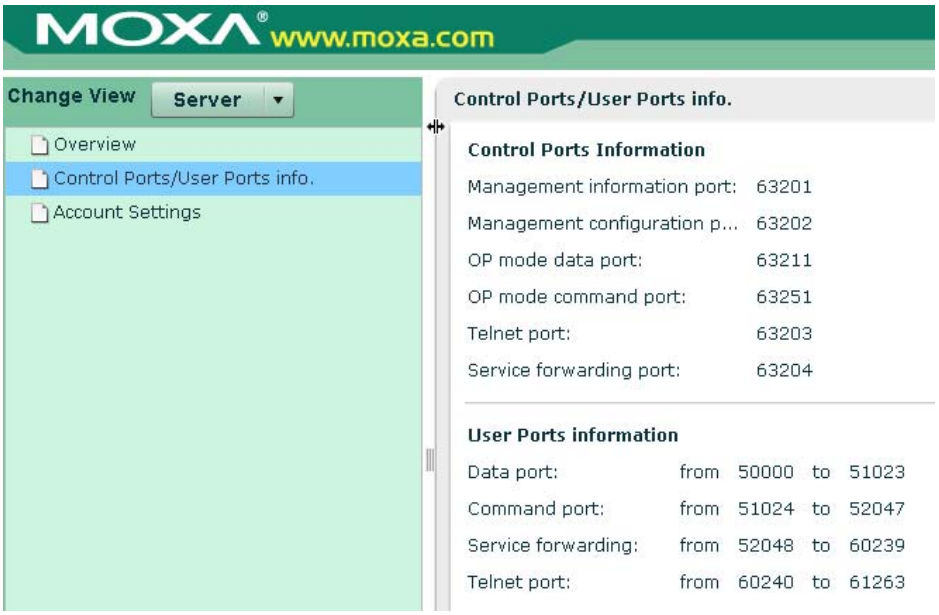

Control Ports Information.

Control ports are used to establish a connection between an OnCell device and the OnCell Central Server. This section shows all control port information that has already been configured.

User Ports info.

User ports are used to establish a connection between the host and the OnCell Central Server. This section shows all ranges of user ports that have been configured. See page 6-25 for an explanation of each user port.

Account Settings

For all changes to the OnCell Central's admin and password protection settings, you will first need to enter the old password. To set up a new password or change the existing password, enter your desired password under both **New password** and **Confirm password**.

Device

This section describes ways in which you can monitor all of the device information that appears in the Device List.

If this is the first time that you have used OnCell Central, be aware that the list of groups in the left pane and the **Device List** will be empty, since you have not added any devices yet.

If you are managing hundreds of devices, the **Device List** can be very long, and.searching the list to locate a particular device can be inconvenient and time-consuming. However, you can use the **All Devices**, **All User Ports**, and **Service Forwarding** tab to view a smaller amount of information, which makes monitoring much easier.

All Devices

This table describes **All Devices** that are connected to OnCell Central Server:

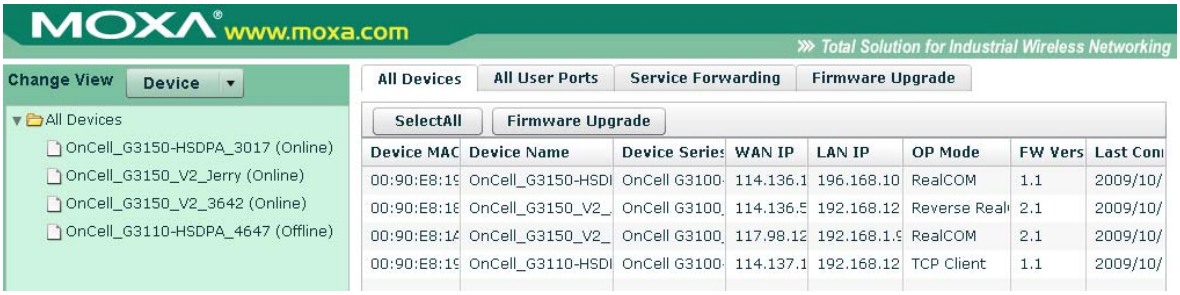

Item	Description
Device MAC	Each Device has unique MAC ID that you can find on the device label or web/telnet/serial console
Device Name	Device's Name
WAN IP	Device's WAN IP address
LAN IP	Device's LAN IP address
OP mode	Device's operation mode (does not apply to the OnCell 5004 and 5104)
FW Version	Device's firmware version
Last Connected	Device's last connection date, month, time

Refresh: The device list is refreshed when this button is pressed. New online devices will be shown at the top of the list.

Auto Refresh (30 secs): If you checkmark this box, the new online device list will be updated every 30 seconds.

Group Edit. When you create groups of devices, you can efficiently apply device settings or perform maintenance tasks on multiple devices at the same time. To create a group, **click the right mouse button and select Group Edit**.

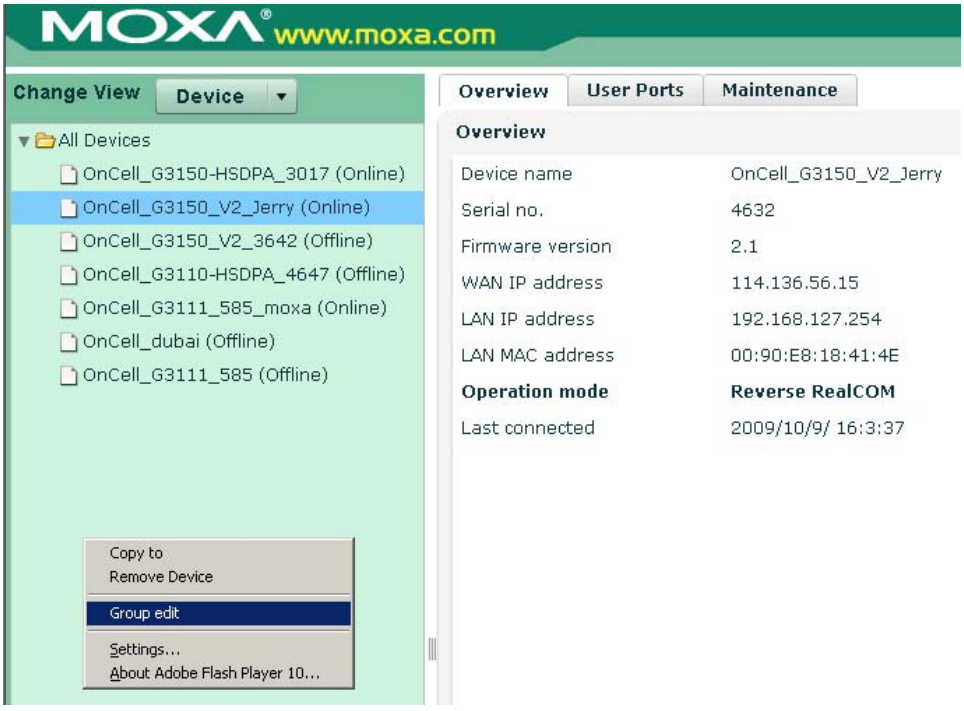

After creating the group, you can copy the devices under **All Devices folder** to create a new folder (e.g., South A).

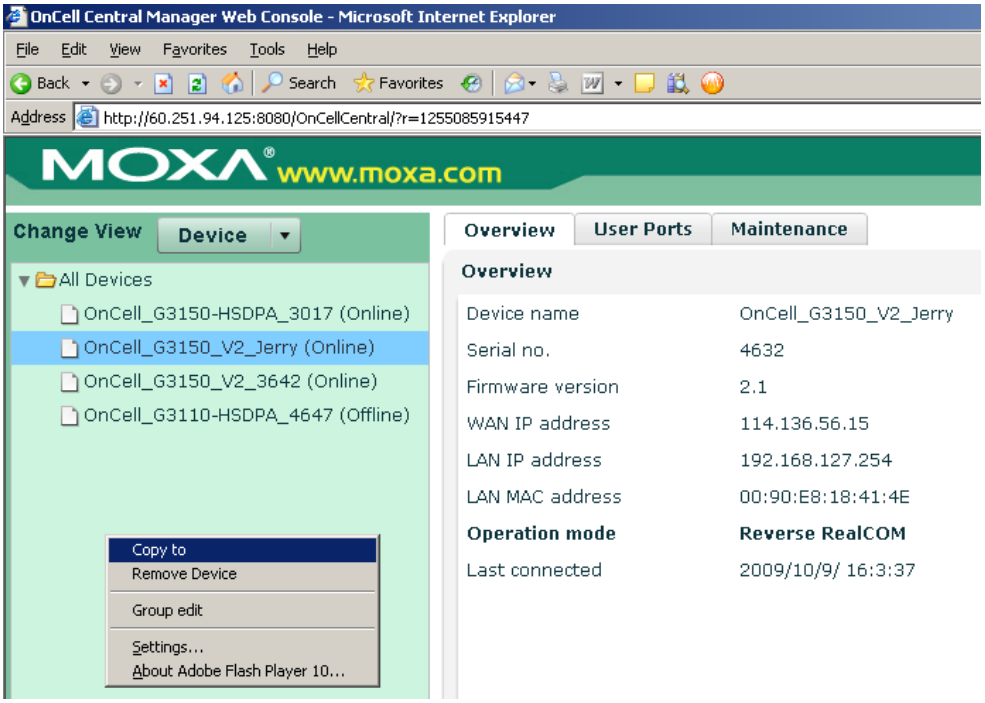

Remove Device. To maintain the list, you can remove all offline devices. To activate this function, **click the right mouse button and select Remove Device**.

Note: If a device is removed from the **All Devices Folder** then the same device will be removed from all other new folders, too.

All User Ports

The **All User Ports** table displays the host's established connections to the OnCell Central Server, and its corresponding OnCell devices.

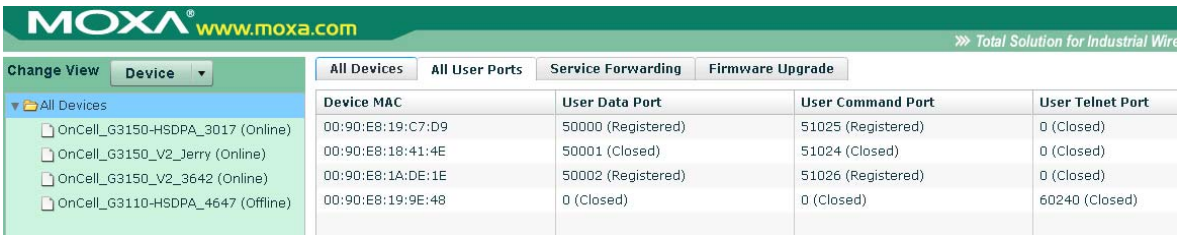

Item	Description
Device MAC	Each Device has a unique MAC ID that you can find on the device label or web/telnet/serial console.
User Data Port	The port number allows the host to establisha serial data connection to OnCell Central, which is mapped to the OnCell device (does not apply to the OnCell 5004 and 5104).
User Command Port	The port number allows the host to establish a command connection to OnCell Central, which is mapped to the OnCell device (does not apply to the OnCell 5004 and 5104).
User Telnet Port	The port number allows the host to establish a telnet connection to OnCell Central, which is mapped to the OnCell device.

Service Forwarding

The **Service Forwarding** table displays the host's established Ethernet connection to the OnCell Central Server, and the corresponding OnCell devices.

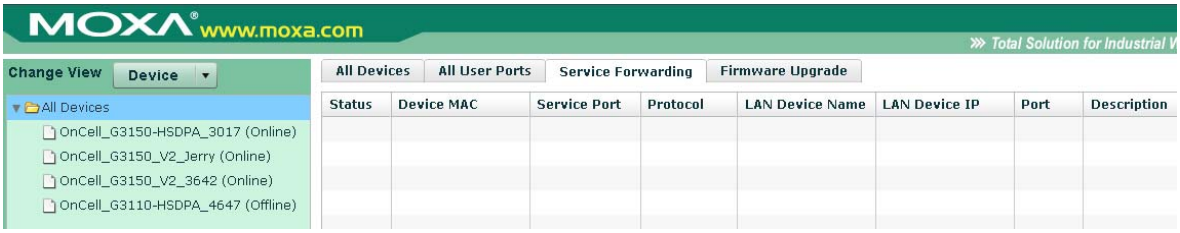

Item	Description
Status	Shows the status of the user's service ports. Closed: this mean the port is not connected Registered: this mean the OnCell is connected to OnCell Central Server. Connected: this mean the host side is connected to OnCell Central Server and is ready to use.
Device MAC	Each Device has a unique MAC ID that you can find on the device label or web/telnet/serial console.
Service Port	The port number allows the host to establish an Ethernet connection to the OnCell Central, which is mapped to the OnCell device.
Protocol	Protocol type for Service forwarding connection
LAN Device Name	Device's Name
LAN Device IP	Device's IP address
Port	This is the Ethernet device's local port number.
Description	Detailed description of the device.

Firmware Upgrade

The **Firmware Upgrade** table displays the firmware upgrade status of your devices.

Item	Description
Device Name	Device's name
Device MAC	Each device's unique MAC ID, which can be found on the device label
Device Model	Device's model
Firmware Support	Device's firmware version
Upgrade Status	Shows the status of the firmware upgrade: Success: this mean the firmware upgrade was successful Fail: this mean the firmware upgrade has failed Cancel: this mean the firmware upgrade was canceled
Upgrade Percentage	Displays the percentage of firmware that has been uploaded.

If you are the administrator, you have ability to use **Clear finished and cancelled upgrades** and **Cancel selected devices** icons on Firmware Upgrade page, and **Select All** and **Firmware Upgrade** on the All devices page.

Clear finished and cancelled upgrades: This button clears all firmware upgrades that have been finished and canceled.

Cancel selected devices: This button cancels the firmware upgrading process of the selected device(s).

Select All: This button makes it easy to select all of your devices for firmware upgrades.

Firmware Upgrade: This button will initiate a firmware upgrade for the devices you have selected.

Device's Settings and Maintenance

From the left navigation panel, click the All Device folder to list all devices, and then select the device that you want to monitor or reconfigure.

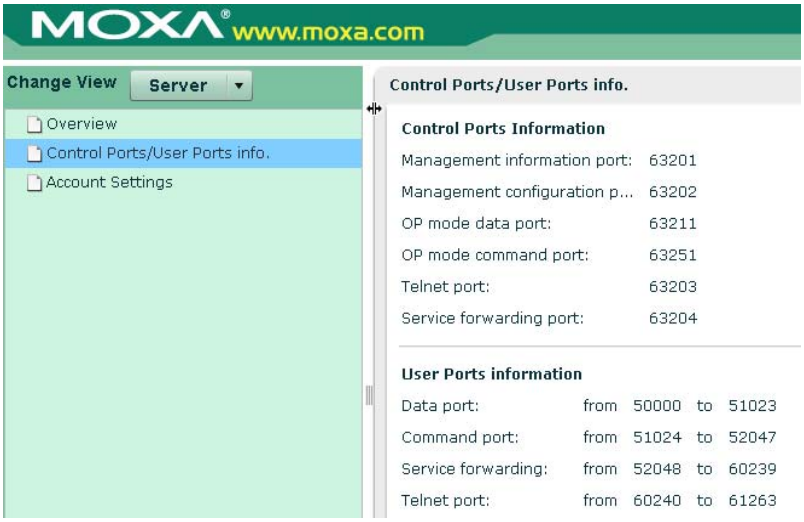

Overview

This page shows the OnCell's device information:

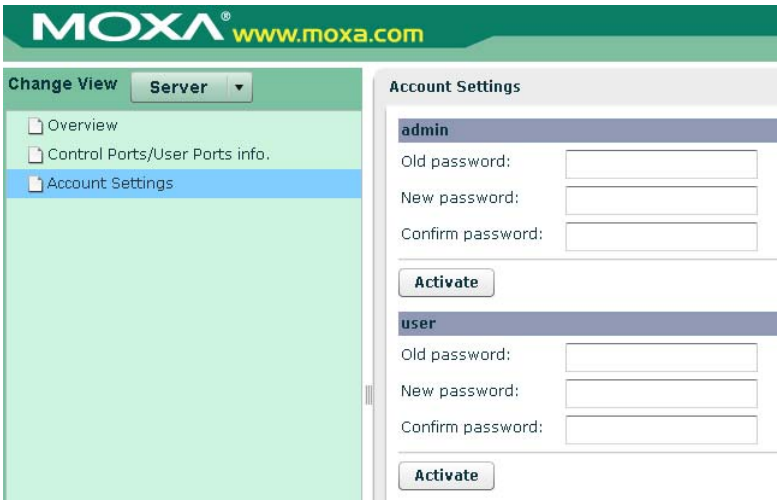

User Ports

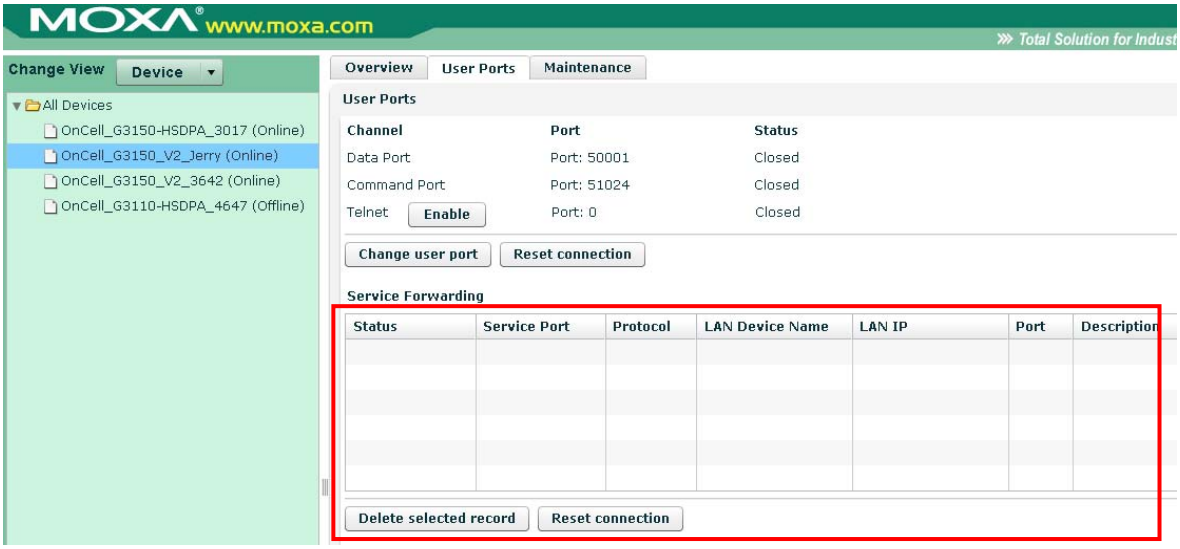

Telnet Enable: If you click on the enable icon, Telnet will permit the the host to connect to the OnCell device. If no connections are made within 30sec, the port will just close.

Change User Port: If you do not want to use the system's assigned user ports, you may change the **User Data Port, User Command Port**, and **Telnet Port** here (does not apply to the OnCell 5004 and 5104).

Reset connection: Use this option to disconnect existing connections.

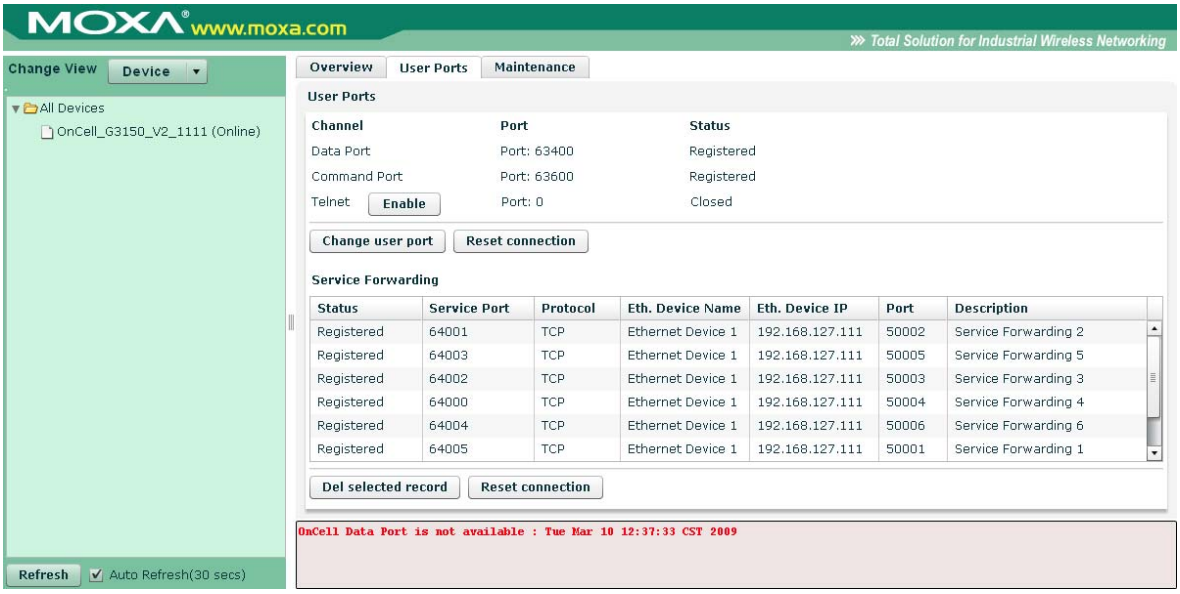

Note: If the data or command port is occupied, an error message will appear at the bottom of the window.

Service Forwarding

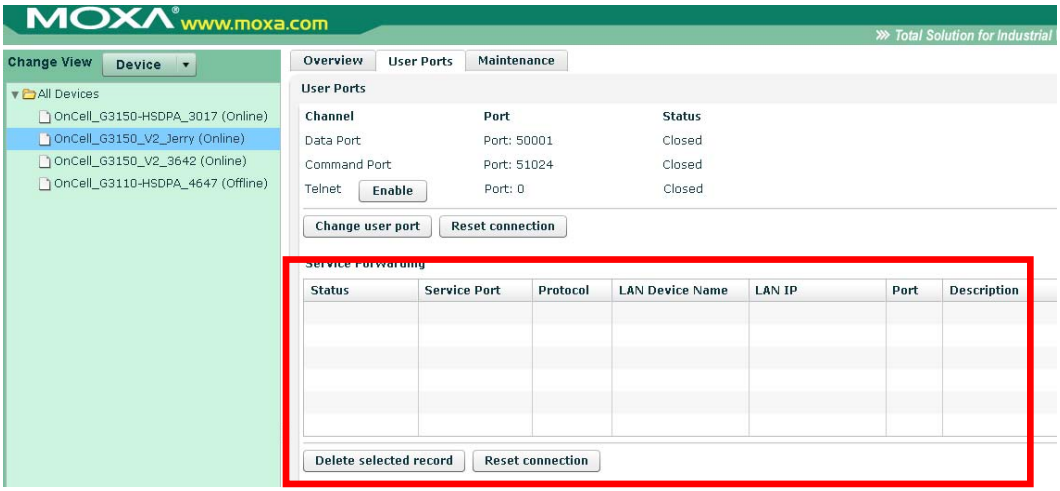

Item	Description
Status	Show the status of the User Service Port. Closed: Means the port is not connected. Registered: Mean the OnCell is connected to OnCell Central Server. Connected: Means the host side is connected to OnCell Central Server, and is ready to use.
Service Port	The port number allows the host to establish an Ethernet connection to OnCell Central, which maps to the OnCell device.
Protocol	Protocol type for Service forwarding connection
LAN Device Name	Device's Name
LAN Device IP	Device's IP address
Port	This is the Ethernet device's local port number.
Description	Detailed description of the device

Del selected record: Allows you to delete the device information under service forwarding that you have highlighted.

Reset connection: This is used to disconnect existing connections.

Maintenance

Configuration Export

To save all tconfigurations to an xml file, select **Configuration Export** and then click **Download**.

Configuration Import

Allows you to import this configuration file to another host and use the same OnCell Central settings in the other host.

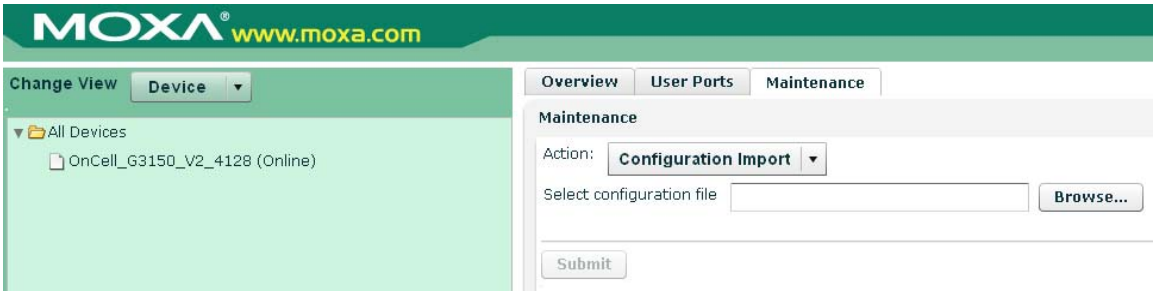

Restart OnCell Device

Click **Restart** to restart the OnCell 5000 device. Be sure that you save all of your configuration changes before you restart the system, or the changes will be lost.

Logout

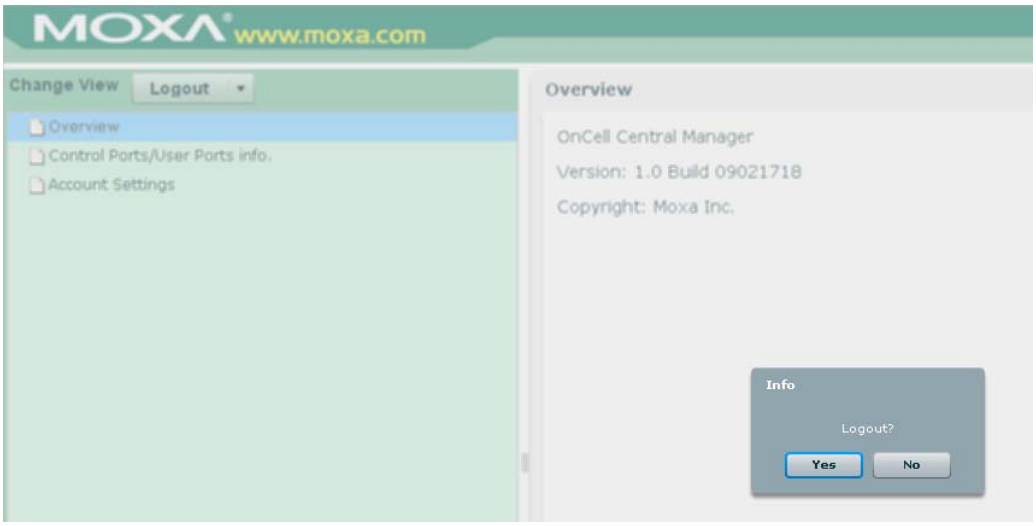
MOXA www.moxa.com
Change View
Logout
Overview
Control Ports/User Ports info.
Account Settings
Overview
OnCell Central Manager
Version: 1.0 Build 09021718
Copyright: Moxa Inc.
Info
Logout?
Yes
No

8

OnCell Search Utility

The following topics are covered in this chapter:

- **Installing the Search Utility**
- **Configuring the OnCell Search Utility**

Installing the Search Utility

1. Click the **INSTALL UTILITY** button in the OnCell Installation CD auto-run window to install OnCell Search Utility. Once the program starts running, click **Yes** to proceed.
2. Click **Next** when the Welcome screen opens to proceed with the installation.

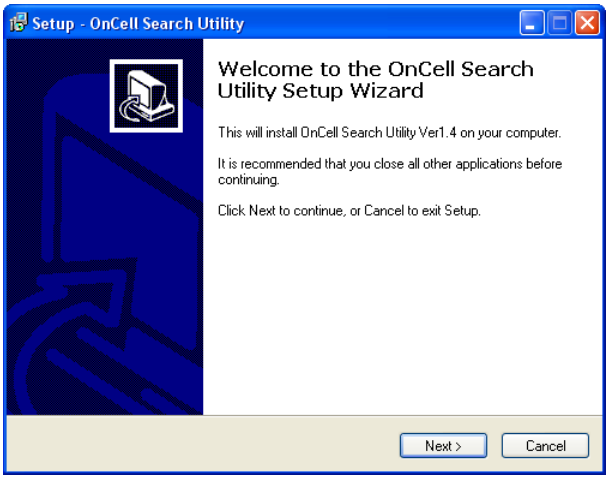
Setup - OnCell Search Utility
Welcome to the OnCell Search Utility Setup Wizard
This will install OnCell Search Utility Ver1.4 on your computer.
It is recommended that you close all other applications before continuing.
Click Next to continue, or Cancel to exit Setup.
Next >
Cancel

3. Click **Next** to install program files to the default directory, or click **Browse** to select an alternate location.

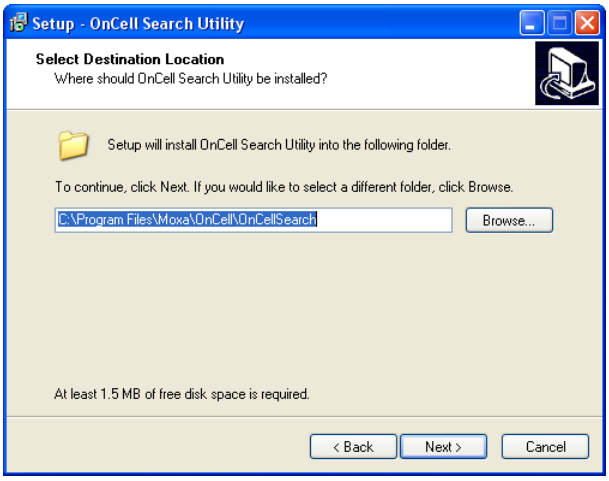
Setup - OnCell Search Utility
Select Destination Location
Where should OnCell Search Utility be installed?
Setup will install OnCell Search Utility into the following folder.
To continue, click Next. If you would like to select a different folder, click Browse.
C:\Program Files\Moxa\OnCell\OnCellSearch
Browse...
At least 1.5 MB of free disk space is required.
< Back
Next >
Cancel

4. Click **Next** to select additional tasks.

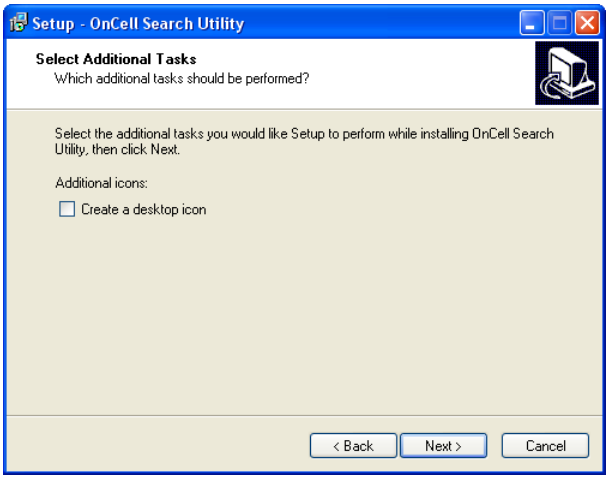
Setup - OnCell Search Utility
Select Additional Tasks
Which additional tasks should be performed?
Select the additional tasks you would like Setup to perform while installing OnCell Search Utility, then click Next.
Additional icons:
Create a desktop icon
< Back
Next >
Cancel

5. Click **Next** to proceed with the installation. The installer then displays a summary of the installation options.

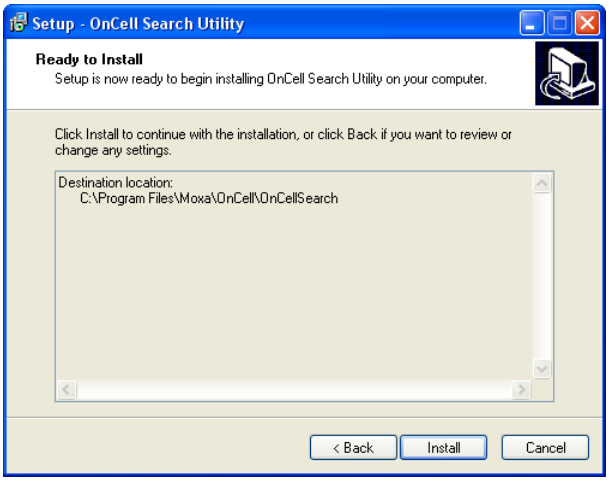
Setup - OnCell Search Utility
Ready to Install
Setup is now ready to begin installing OnCell Search Utility on your computer.
Click Install to continue with the installation, or click Back if you want to review or change any settings.
Destination location:
C:\Program Files\Moxa\OnCell\OnCellSearch
< Back
Install
Cancel

6. Click **Install** to begin the installation. The setup window will report the progress of the installation. To change the installation settings, click **Back** and navigate to the previous screen.
7. Click **Finish** to complete the installation of OnCell Search Utility.

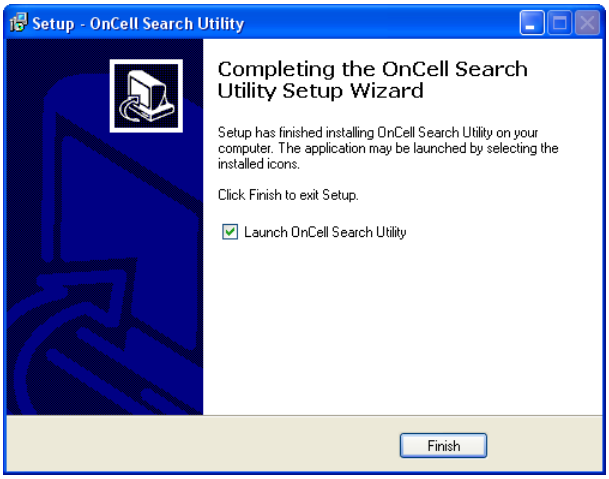
Setup - OnCell Search Utility
Completing the OnCell Search Utility Setup Wizard
Setup has finished installing OnCell Search Utility on your computer. The application may be launched by selecting the installed icons.
Click Finish to exit Setup.
Launch OnCell Search Utility
Finish

Configuring the OnCell Search Utility

The Broadcast Search function is used to locate all OnCell 5000 servers that are connected to the same LAN as your computer. After locating an OnCell 5000, you will be able to change its IP address.

Since the Broadcast Search function searches by MAC address and not IP address, all OnCell 5000 servers connected to the LAN will be located, regardless of whether or not they are part of the same subnet as the host.

1. Open OnCell Search Utility and then click the **Search** icon.

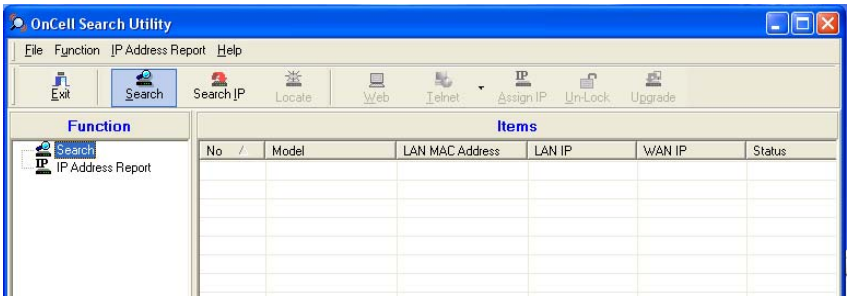

The Searching window indicates the progress of the search.

2. When the search is complete, all OnCell 5000 servers that were located will be displayed in the OnCell Search Utility window.

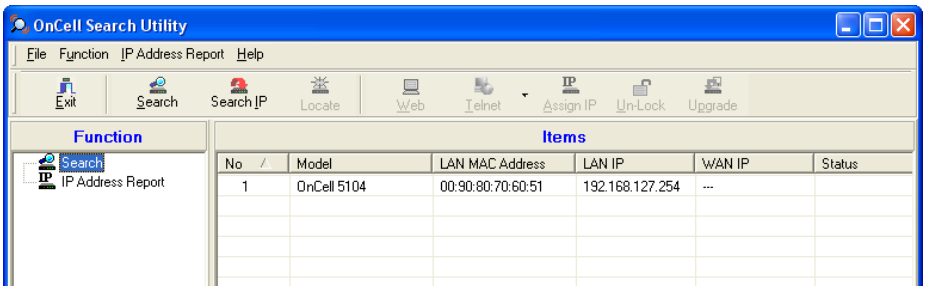
OnCell Search Utility
File Function IP Address Report Help
Exit Search Search IP Locate Web Telnet Assign IP Un-Lock Upgrade
Function
Search
IP Address Report
Items
No / Model LAN MAC Address LAN IP WAN IP Status
1 OnCell 5104 00:90:80:70:60:51 192.168.127.254 ---

3. Click **Locate** to cause the selected device to beep.

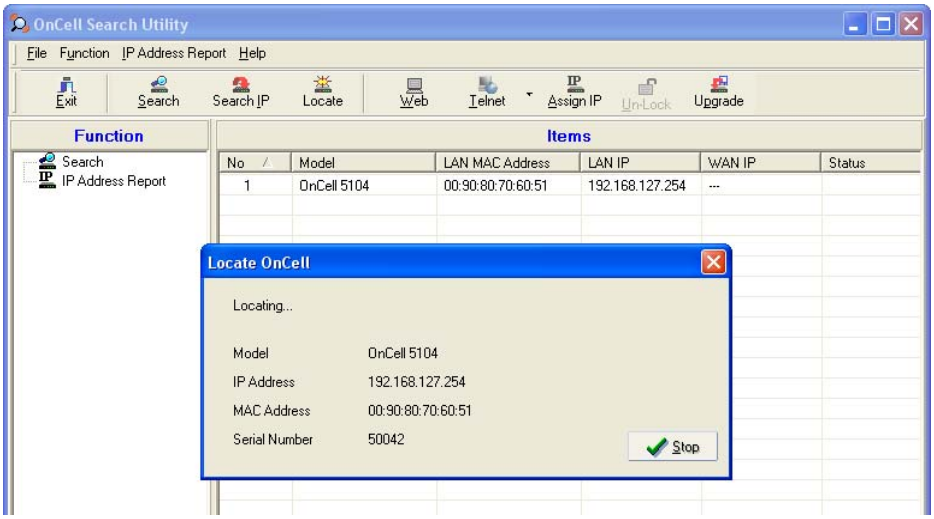

4. To modify the configuration of the highlighted OnCell 5000, click on the Console icon to open the web console. This will take you to the web console, where you can make all configuration changes. Please refer to Chapter 4, *Using the Web Console*, for information on how to use the web console.

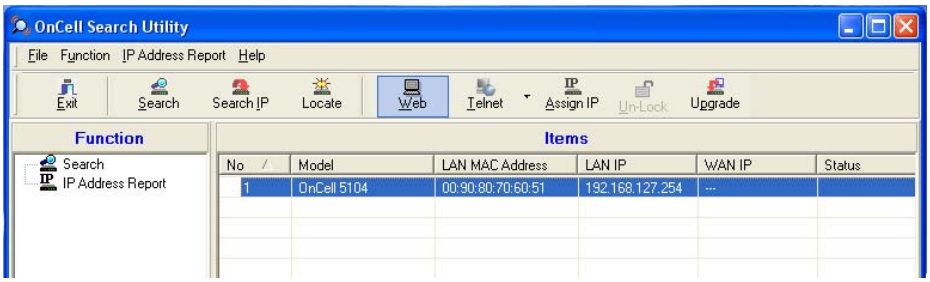
OnCell Search Utility
File Function IP Address Report Help
Exit Search Search IP Locate Web Telnet Assign IP Un-Lock Upgrade
Function
Search
IP Address Report
Items
No / Model LAN MAC Address LAN IP WAN IP Status
1 OnCell 5104 00:90:80:70:60:51 192.168.127.254 ---

5. Select **IP Address** Report for monitoring the status of the IP Address, and then click **Go**.

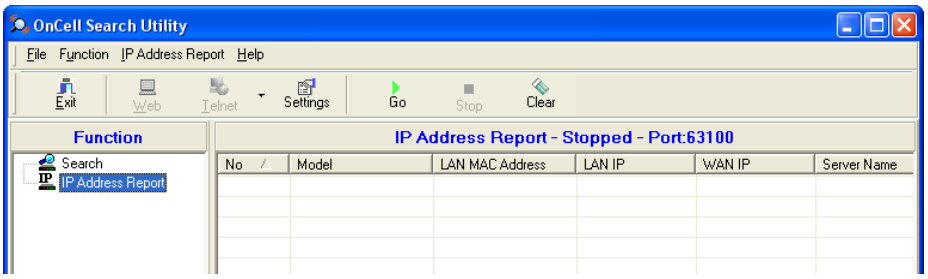
OnCell Search Utility
File Function IP Address Report Help
Exit Web Telnet Settings Go Stop Clear
Function
Search
IP Address Report
IP Address Report - Stopped - Port:63100
No / Model LAN MAC Address LAN IP WAN IP Server Name

6. To change the configuration of the IP Address Report, click on the **Settings** icon to open the IP Location Settings. The Local UDP listen Port number should match the web console Auto IP Report Settings' port number.

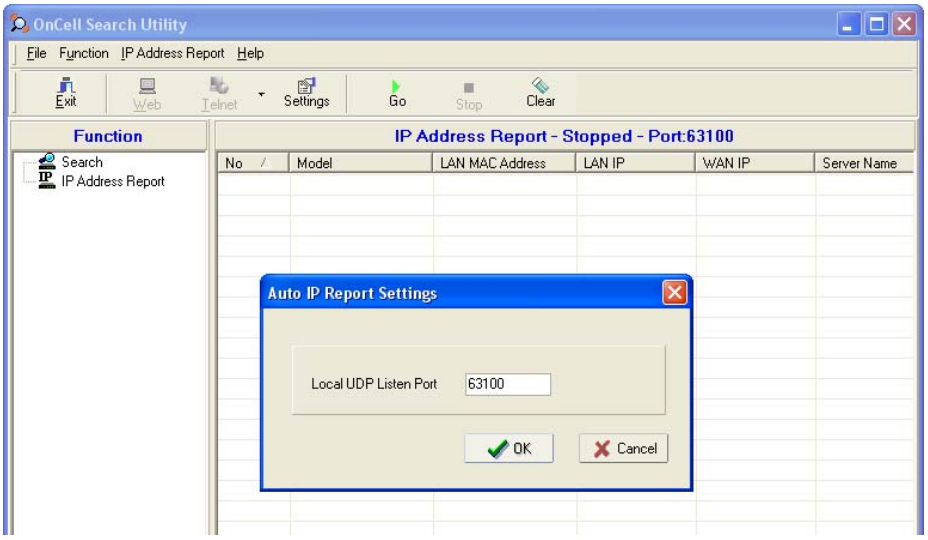

7. Click the **Go** icon to complete the configuration. Refer to Chapter 4, *Using the Web Console*, for information on how to use the IP Address Report.

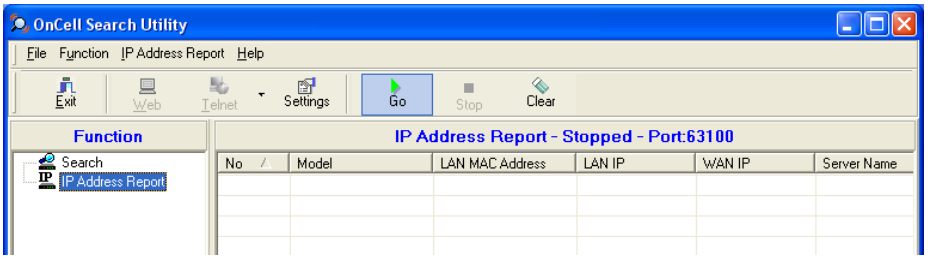
OnCell Search Utility
File Function IP Address Report Help
Exit Web Telnet Settings Go Stop Clear
Function
Search
IP Address Report
IP Address Report - Stopped - Port:63100
No Model LAN MAC Address LAN IP WAN IP Server Name

A

Default Settings

Setting Name	Default Name
Web Console Login	
Username	admin
Password	Keep <blank>
Network Settings	
LAN IP address	192.168.127.254
WAN IP address	192.168.126.254
Network	255.255.255.0
WAN Preference	Cellular
Cellular Settings	
SIM PIN	<blank>
NAT service	Enable
DHCP Service Settings	
DHCP Server	Enable
DNS relay	Enable
Virtual Server Settings	
Virtual Server	Disable
Route Table	
Static Route	Disable
WAN IP Filter Configuration	
WAN IP Filter	Disable

B

Dynamic Domain Name Server

This appendix explains how to use the OnCell 5000 with DDNS. When the OnCell 5000 receive its IP address from a DHCP (Dynamic Host Configuration Protocol) server, remote servers will be unable to access it using a fixed IP address. With DDNS (Dynamic Domain Name Server), a remote server can access the OnCell G3100 using its domain name instead of its IP address.

Overview

The following is a summary of the process:

1. The OnCell 5000 sends a request for an IP address to the DHCP server. At the same time, it notifies the DHCP server of its desired server name (“OC3100” in the illustration) according to the option 12 standard.
2. The DHCP server replies with the IP address that is assigned to the OnCell 5000, along with the domain name (“moxa.com” in the illustration) and the IP addresses for the DNS server and gateway.
3. If the OnCell 5000 has authorization to update the DNS server, it will register its FQDN (Fully Qualified Domain Name) with the DNS server. The OnCell 5000’s FQDN will be in the format server name.domain name (“OC3100.moxa.com” in the illustration).
4. If the OnCell 5000 is not authorized to update the DNS server, the DHCP server can be used to update the DNS server. The DHCP server will register the DNS server with the PTR RR (the record of request for a domain name with IP address).

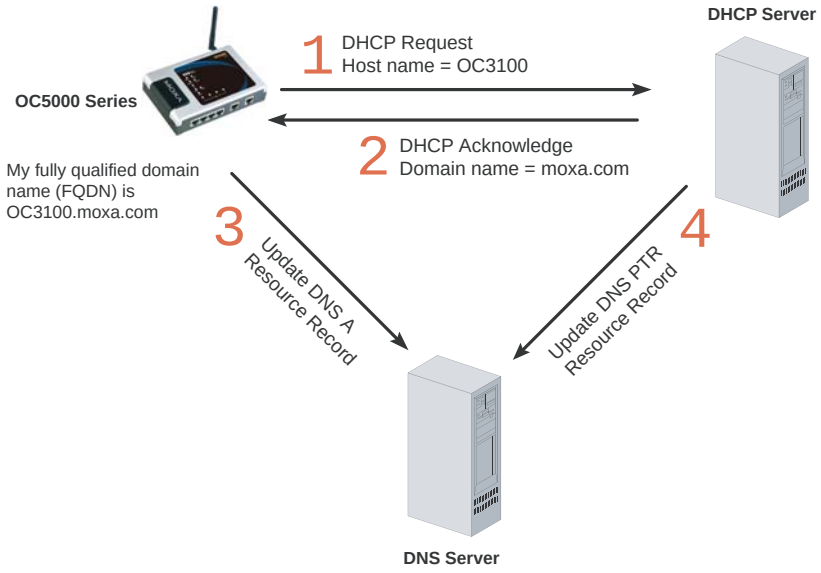

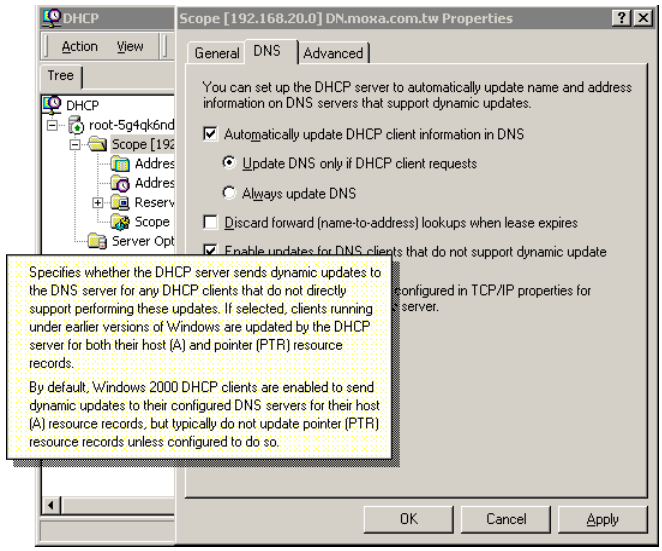
DHCP
Action View
Tree
DHCP
root-5g4qk6nd
Scope [192
Addres
Addres
Reserv
Scope
Server Opt
Scope [192.168.20.0] DN.moxa.com.tw Properties
General DNS Advanced
You can set up the DHCP server to automatically update name and address information on DNS servers that support dynamic updates.
Automatically update DHCP client information in DNS
Update DNS only if DHCP client requests
Always update DNS
Discard forward (name-to-address) lookups when lease expires
Enable updates for DNS clients that do not support dynamic update
Specifies whether the DHCP server sends dynamic updates to the DNS server for any DHCP clients that do not directly support performing these updates. If selected, clients running under earlier versions of Windows are updated by the DHCP server for both their host (A) and pointer (PTR) resource records.
By default, Windows 2000 DHCP clients are enabled to send dynamic updates to their configured DNS servers for their host (A) resource records, but typically do not update pointer (PTR) resource records unless configured to do so.
OK
Cancel
Apply

The above screenshot shows how DHCP can be set up to update the DNS.

Currently, the OnCell 5000 supports DNS service as provided by DynDNS. For detailed information on this option, please visit https://www.dyndns.com.

Configuration

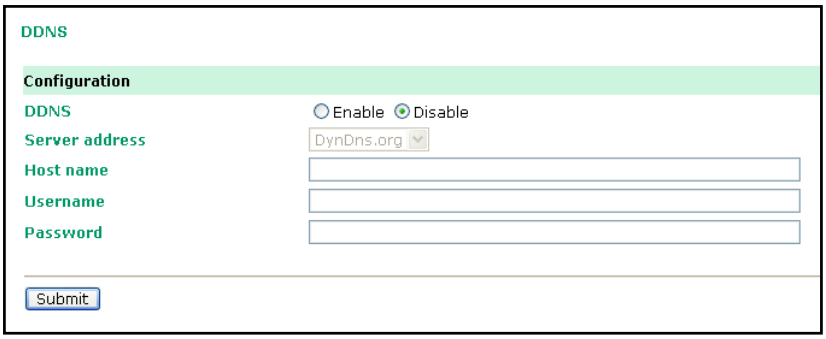

DDNS (default=Disable): Use this field to enable or disable DDNS.

Server address (default=DynDns.org): Currently, DynDns.org is the only option available for Server address.

Host name: In this field, use the name that you created on www.dyndns.com. The OnCell 5000 will update the DynDNS server with this host name.

Username: This is the user name used for update authentication.

Password: This is the password used for update authentication.

C

Auto IP Report Protocol

OnCell Series provides several ways to configure the Ethernet IP addresses. One of them is DHCP Client. When you set up the OnCell to use DHCP Client to configure Ethernet IP addresses, it will automatically send a DHCP request over the Ethernet to find the DHCP Server. And then the DHCP Server will send an available IP address to the OnCell. The OnCell will use this IP address for a period of time after receiving it. But the OnCell will send a DHCP request again to the DHCP Server. Once the DHCP Server realizes that this IP address is to be released to other DHCP Client, the OnCell then will receive a different IP address. For this reason, users sometimes find that the OnCell will use different IP addresses, not a fixed IP address.

In order to know what IP address the OnCell is using, you need to set up parameters in Network Settings via Web browser. The figure below is the OnCell Web console configuration window. Enter the IP address and the Port number of the PC that you want to send this information to.

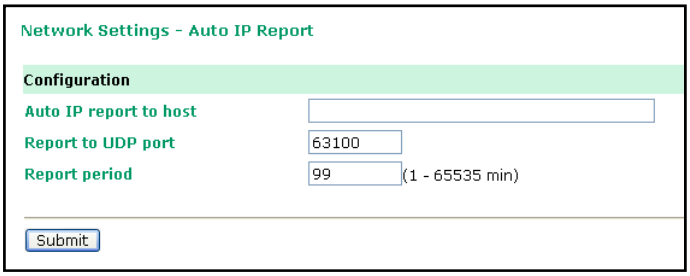

Auto IP Report Format

“Moxa”, 4 bytes	Info[0]	Info[1]	...	Info[n]

Info [n]

Field	ID	Length	Data
Length	1	1	Variable, Length is “Length Field”

ID List

ID Value	Description	Length	Note
1	Server Name	Variable	ASCII char
2	Hardware ID	2	Little-endian
3	MAC Address	6	6 bytes MAC address. If the MAC address is "00-90-E8-01-02-03", the MAC[0] is 0, MAC[1] is 0x90(hex), MAC[2] is 0xE8(hex), and so on.
4	Serial Number	4, DWORD	Little-endian
5	IP Address	4, DWORD	Little-endian (LAN IP)
9	AP ID	4, DWORD	Little-endian
10	IP Address2	4, DWORD	Little-endian (WAN IP)
11	Signal Level	1	Unsiqned char
12	RSSI	1	Unsiqned char

AP ID & Hardware ID Mapping Table

AP ID	Hardware ID	Product
0x80003500	0x3510	OnCell G3110
0x80003500	0x3550	OnCell G3150